Rubber 3D RGBW

LED Strip | 112 topLED 15 W DC 24 V | 15 W/m
CRI >90 | RGBW - 3000
C0014VDI01004

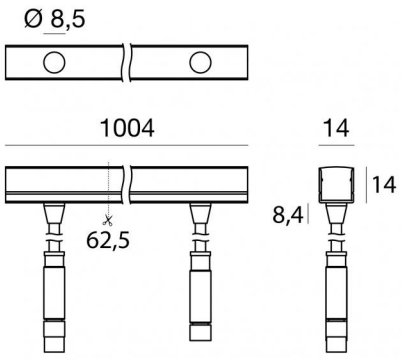

Technische Daten	
Länge	1000 mm
Minimaler Schnitt	62.5 mm
Typ	LED Strip
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	15 W DC
Lampenleistung / m	15 W / m
Lichtstrom (Lichtquelle)	982 lm
Lichtstrom (Lichtquelle) / m	982 lm / m
Ähnlichste Farbtemperatur / Tone	RGBW - 3000 K
Farbwiedergabeindex	>90 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP67
IK	IK07
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
ETL	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1(M)x0.25 m + 1(F)x0.25 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.103 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PU
Farbe	Opal

Elektronik

99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 10 art.)

99332
1-10V Controller (1 - 10 art.)

C-E700005
DMX-RDM Multi Channel V DC (- art.)

Nennlichtstrom für eine einzelne Farbe - RGBW - 3000K

N. Led	Rot	Grün	Blau	Weiß
112	92 lm	356 lm	84 lm	450 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW

LED Strip | 112 topLED 15 W DC 24 V | 15 W/m | CRI >90 | RGBW - 3000 | + Blue
C0014VDI01004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 112 topled LEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 982 lm, with a 65.5 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.103 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 15 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	33 lm
Consumption	3 W
Leuchten Lichtausbeute	11 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L90 B10 C0 54000h

UGR	
UGR axial	14.5
UGR transversal	16.9
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	121°
Light distribution simmetry	Symmetrical 2 assis

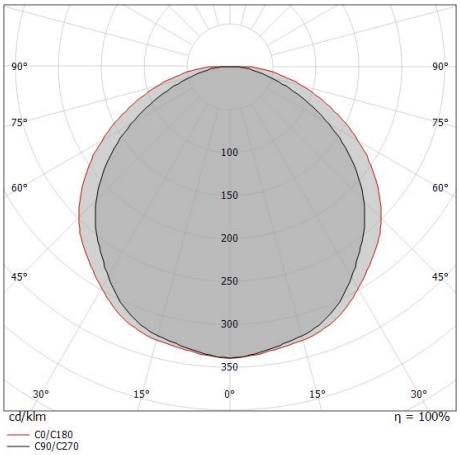

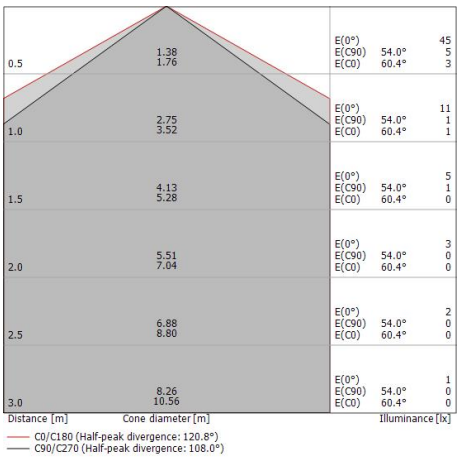

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW

LED Strip | 112 topLED 15 W DC 24 V | 15 W/m | CRI >90 | RGBW - 3000 | + White

C0014VDI01004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 112 topled LEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 982 lm, with a 65.5 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.103 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 15 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	238 lm
Consumption	5.5 W
Leuchten Lichtausbeute	43 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L90 B10 C0 54000h

UGR	
UGR axial	21.4
UGR transversal	23.8
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	121°
Light distribution simmetry	Symmetrical 2 assis

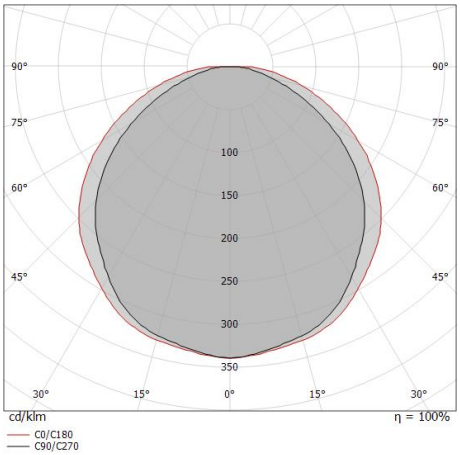

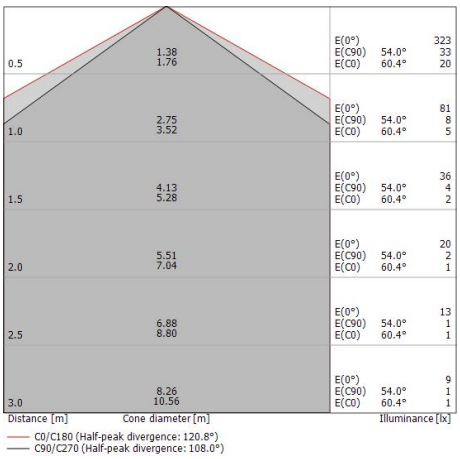

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW

LED Strip | 112 topLED 15 W DC 24 V | 15 W/m | CRI >90 | RGBW - 3000 | + Green

C0014VDI01004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 112 topled LEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 982 lm, with a 65.5 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.103 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 15 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	164 lm
Consumption	4 W
Leuchten Lichtausbeute	41 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L90 B10 C0 54000h

UGR	
UGR axial	20.1
UGR transversal	22.5
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	121°
Light distribution simmetry	Symmetrical 2 assis

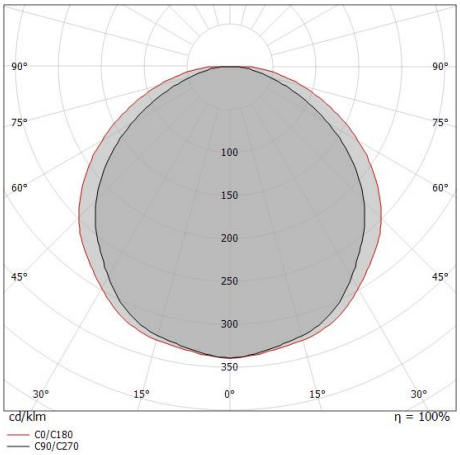

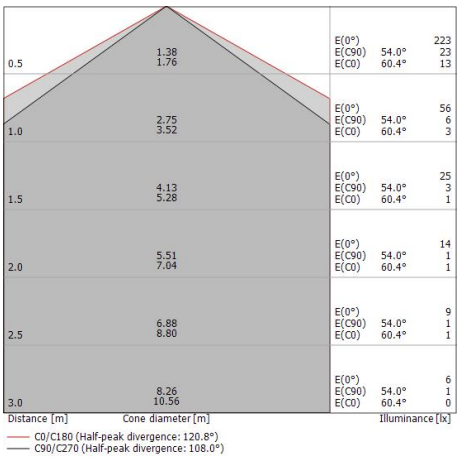

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW

LED Strip | 112 topLED 15 W DC 24 V | 15 W/m | CRI >90 | RGBW - 3000 | + Red

C0014VDI01004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 112 topled LEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 982 lm, with a 65.5 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.103 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 15 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	51 lm
Consumption	2,8 W
Leuchten Lichtausbeute	25 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L90 B10 C0 54000h

UGR	
UGR axial	16
UGR transversal	18.4
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	121°
Light distribution simmetry	Symmetrical 2 assis

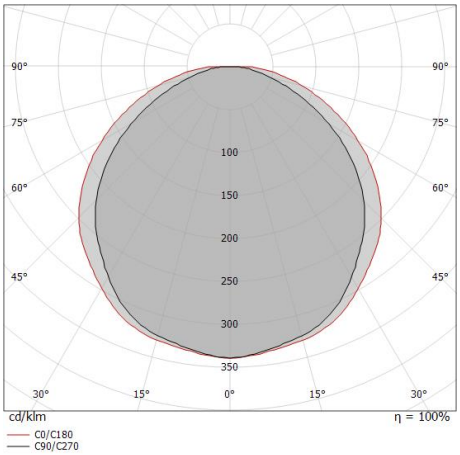

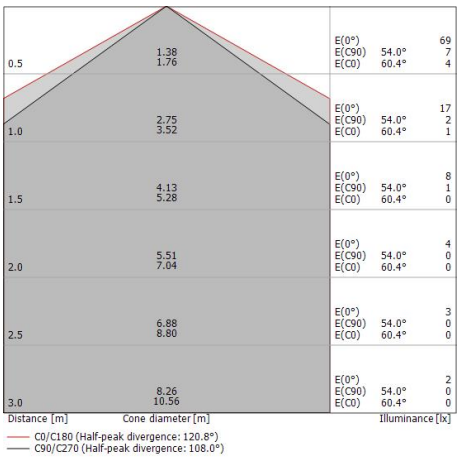

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW

LED Strip | 112 topLED 15 W DC 24 V | 15 W/m | CRI >90 | RGBW - 3000

C0014VDI01004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 112 topled LEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 982 lm, with a 65.5 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 0.103 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 15 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	478 lm
Consumption	15 W
Leuchten Lichtausbeute	31 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L90 B10 C0 54000h

UGR	
UGR axial	23.8
UGR transversal	26.2
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	121°
Light distribution simmetry	Symmetrical 2 assis

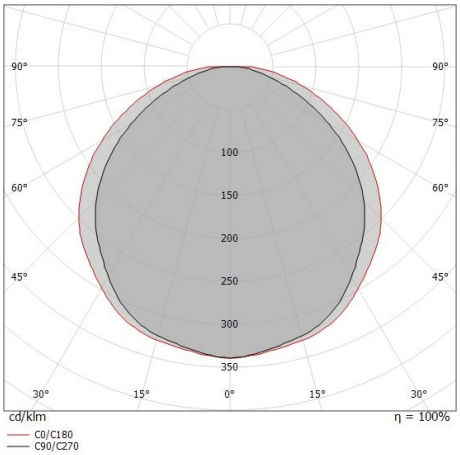

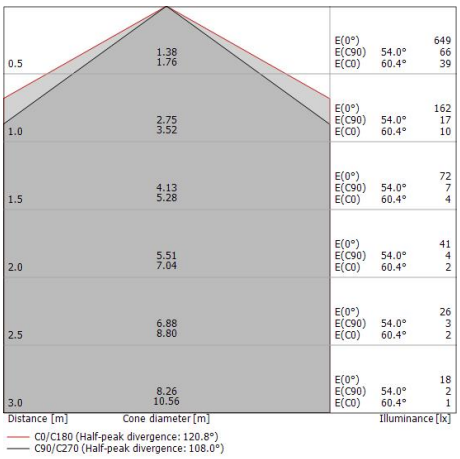

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

LED Strip | 112 topLED 15 W DC 24 V | 15 W/m | CRI >90 | RGBW - 3000
C0014VDI01004

Components

			Code
		D-Wave	77407

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW | LED Strip | Accessories
C0014VDI01004



Einbaugehäuse - Linearprofil aus Aluminium 19x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3d Pixel
installationsposition: wand, decke L=1000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99549





Einbaugehäuse - Linearprofil aus Aluminium 19x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82198



Profil - Schwarzes Aluminium 18x19 Profil 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100007



Profil - Schwarzes Aluminium 18x19 Profil 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100008



Klammer - Clip mit Zahnfeder - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400001



Klammer - Clip mit Zahnfeder - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400002





Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=1000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
83034



Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82199

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW | LED Strip | Accessories
C0014VDI01004



Profil - Profil 39x19 Aluminium schwarz 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100009



Profil - Profil 39x19 Aluminium schwarz 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100010



Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400003



Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400004



Profil - Flexibles Profil
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K100011





Blendschutz - Blendfreies Augenlid mit Fischgrätenmuster
Blendschutzart: palpebra.
Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.

Code
C-K100032



Befestigungssatz - Wandkipp-Set aus AISI 304-Stahl
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K400168



Befestigungssatz - Wandkipp-Set aus AISI 304-Stahl
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K400169

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW | LED Strip | Accessories
C0014VDI01004



Erdspießen - ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG
D114X204 fur Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
83351

Befestigungssatz - Bodenpfahl mit kippbarer Halterung

Code
C-F500004

Befestigungssatz - Bodenpfahl mit kippbarer Halterung

Code
C-F500005

Endkappe
Material:, farbe:Transparent.

Code
99539

Lochschablone
Material:Aluminium, farbe:Polished aluminium.

Code
C-V200005



Profil
Material:UV beständiges Polycarbonat, farbe:Transparent.

Code
C-K100021



Profil
Material:UV beständiges Polycarbonat, farbe:Transparent.

Code
C-K100022



Elektronisches Zubehör - Track?System?Netzteil für Rubber 3D
installationsposition: decke L=218mm, H=42mm, D=31mm.
Material:Kunststoff ABS, farbe:Weiß.

Code
C-E300007

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW | LED Strip | Accessories
C0014VDI01004



Elektronisches Zubehör - Track?System?Netzteil für Rubber 3D
installationsposition: decke L=218mm, H=42mm, D=31mm.
Material:Kunststoff ABS, farbe:Black.

Code
C-E300008

Strip Service - Doppelseitiges Klebeband 33 Meter

Code
99520

Kabelklemme
Material:Kunststoff ABS, farbe:Black.

Code
C-W300001

Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 2000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200005

Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 2000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200006

Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 5000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200011



Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

Code
C-W600001

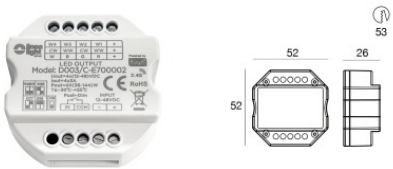

Dimmer - Smart_PRO CV | RF Fernbedienungs Controller WiFi – Eingang 12/24/48V – Ausgang: 3A × 4 Kanäle 12/24/48V
RF Remote controller

Code
C-E700002

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D RGBW | LED Strip | Accessories
C0014VDI01004

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.