

LED Strip | 600 topLED 75 W DC 48 V | 15 W/m | CRI >90 | RGBW - 3000 | + Green
C0016VDI05004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 600 topLEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 5125 lm, with a 68.3 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.


The ingress protection degree is IP67; the total weight is of 1.365 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 75 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse	
Dieses Produkt enthält 5 Lichtquellen der Energieeffizienzklasse G.	
Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	830 lm
Consumption	18 W
Leuchten Lichtausbeute	46 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C
LED Life / Failure Ratio	
L90 B10 C0 54000h	
UGR	
UGR axial	19.9
UGR transversal	23.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C90/C270	110°
Optik C0/C180	134°
Light distribution simmetry	Symmetrical 2 assis

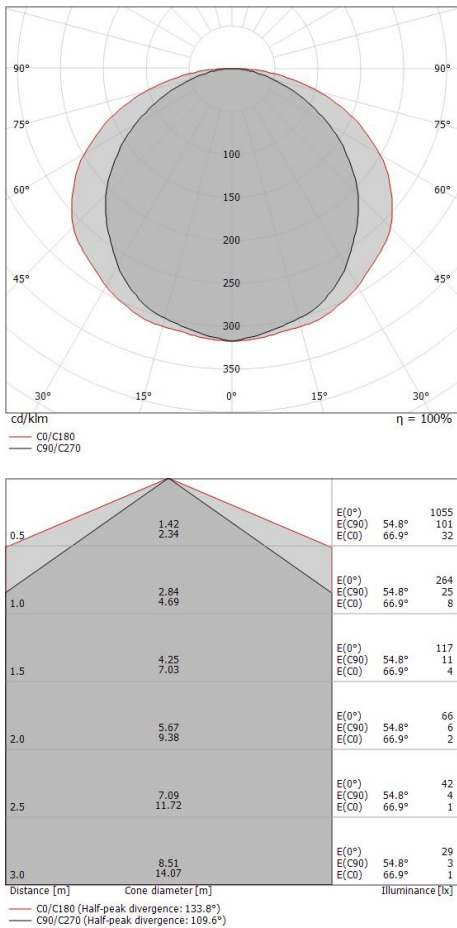

LED Strip | 600 topLED 75 W DC 48 V | 15 W/m | CRI >90 | RGBW - 3000 | + Blue
C0016VDI05004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 600 topLEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 5125 lm, with a 68.3 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.


The ingress protection degree is IP67; the total weight is of 1.365 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 75 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse	
Dieses Produkt enthält 5 Lichtquellen der Energieeffizienzklasse G.	
Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	190 lm
Consumption	18 W
Leuchten Lichtausbeute	10 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C
LED Life / Failure Ratio	
L90 B10 C0 54000h	
UGR	
UGR axial	14.8
UGR transversal	18.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C90/C270	110°
Optik C0/C180	134°
Light distribution simmetry	Symmetrical 2 assis

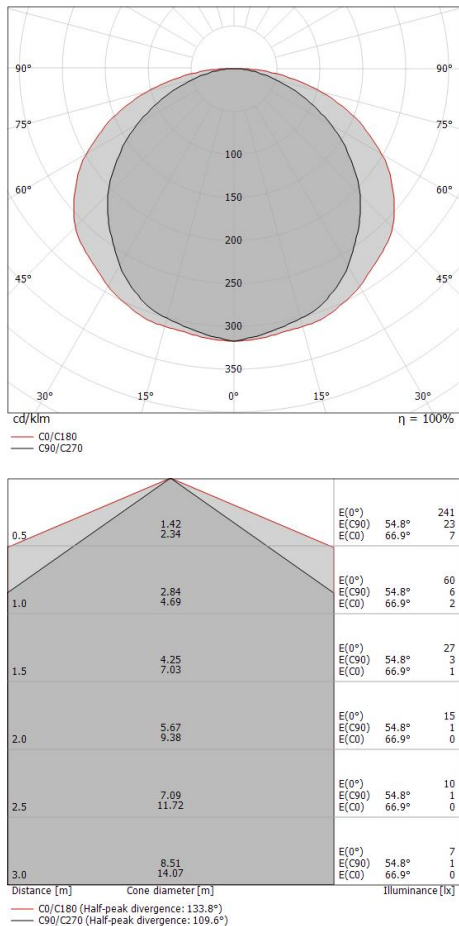

LED Strip | 600 topLED 75 W DC 48 V | 15 W/m | CRI >90 | RGBW - 3000 | + White
C0016VDI05004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 600 topLEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 5125 lm, with a 68.3 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.


The ingress protection degree is IP67; the total weight is of 1.365 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 75 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse	
Dieses Produkt enthält 5 Lichtquellen der Energieeffizienzklasse G.	
Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	1145 lm
Consumption	25 W
Leuchten Lichtausbeute	45 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C
LED Life / Failure Ratio	
L90 B10 C0 54000h	
UGR	
UGR axial	21
UGR transversal	24.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C90/C270	110°
Optik C0/C180	134°
Light distribution simmetry	Symmetrical 2 assis

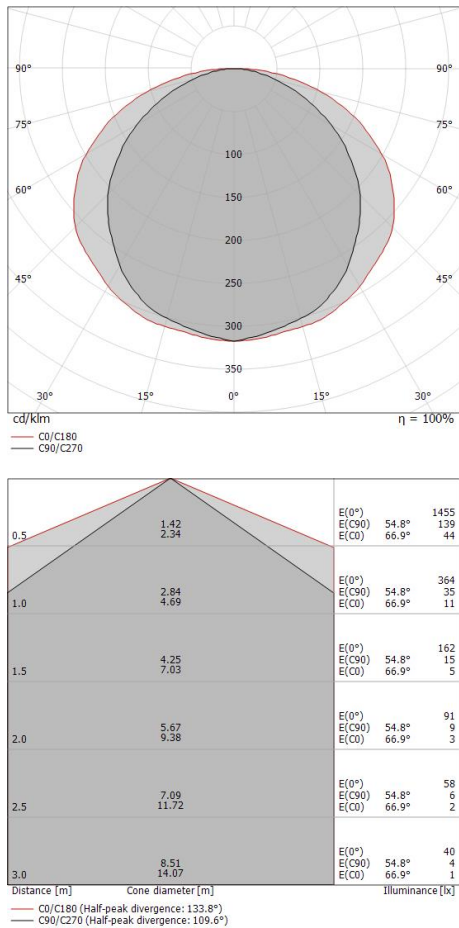

LED Strip | 600 topLED 75 W DC 48 V | 15 W/m | CRI >90 | RGBW - 3000
C0016VDI05004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 600 topLEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 5125 lm, with a 68.3 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.



The ingress protection degree is IP67; the total weight is of 1.365 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 75 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse	
Dieses Produkt enthält 5 Lichtquellen der Energieeffizienzklasse G.	
Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	2365 lm
Consumption	75 W
Leuchten Lichtausbeute	31 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C
LED Life / Failure Ratio	
L90 B10 C0 54000h	
UGR	
UGR axial	23.6
UGR transversal	26.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C90/C270	110°
Optik C0/C180	134°
Light distribution simmetry	Symmetrical 2 assis

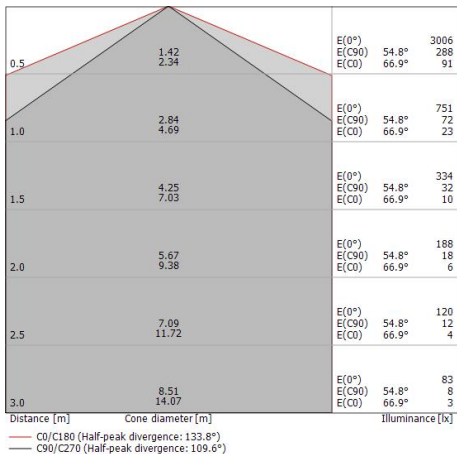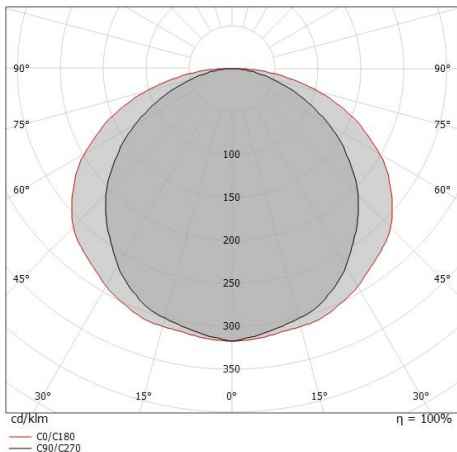

LED Strip | 600 topLED 75 W DC 48 V | 15 W/m | CRI >90 | RGBW - 3000 | + Red
C0016VDI05004

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 600 topLEDs with CCT of RGB-W 3000 K and a CRI >90; the source luminous flux is 5125 lm, with a 68.3 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.


The ingress protection degree is IP67; the total weight is of 1.365 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 75 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse	
Dieses Produkt enthält 5 Lichtquellen der Energieeffizienzklasse G.	
Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	285 lm
Consumption	18 W
Leuchten Lichtausbeute	15 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C
LED Life / Failure Ratio	
L90 B10 C0 54000h	
UGR	
UGR axial	16.2
UGR transversal	19.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C90/C270	110°
Optik C0/C180	134°
Light distribution simmetry	Symmetrical 2 assis

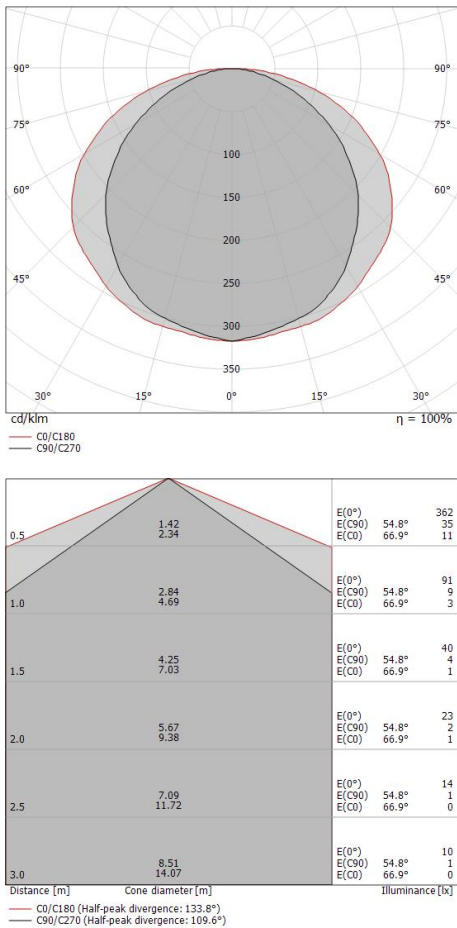

LED Strip | 600 topLED 75 W DC 48 V | 15 W/m | CRI >90 | RGBW - 3000
C0016VDI05004


Components

		D-Wave	Code
			77407

Rubber 3D RGBW | LED Strip | Accessories
C0016VDI05004


		Einbaugehäuse - Linearprofil aus Aluminium 19x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel installationsposition: wand, decke L=1000mm, H=18mm, D=19mm. Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.	Code <u>99549</u>
		Einbaugehäuse - Linearprofil aus Aluminium 19x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel installationsposition: wand, decke L=2000mm, H=18mm, D=19mm. Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.	Code <u>82198</u>
		Profil - Schwarzes Aluminium 18x19 Profil 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.	Code <u>C-K100007</u>
		Profil - Schwarzes Aluminium 18x19 Profil 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.	Code <u>C-K100008</u>
		Klammer - Clip mit Zahnfeder - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection) installationsposition: wand, decke L=50mm, H=23mm, D=21mm. Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.	Code <u>C-F400001</u>
		Klammer - Clip mit Zahnfeder - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection) installationsposition: wand, decke L=50mm, H=23mm, D=21mm. Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.	Code <u>C-F400002</u>
		Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel installationsposition: wand, decke L=1000mm, H=39mm, D=19mm. Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.	Code <u>83034</u>
		Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel installationsposition: wand, decke L=2000mm, H=39mm, D=19mm. Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.	Code <u>82199</u>

Rubber 3D RGBW | LED Strip | Accessories
C0016VDI05004




Profil - Profil 39x19 Aluminium schwarz 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100009




Profil - Profil 39x19 Aluminium schwarz 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100010



Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400003





Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400004




Profil - Flexibles Profil
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K100011




Blendschutz - Blendfreies Augenlid mit Fischgrätenmuster
Blendschutzart: palpebra.
Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.

Code
C-K100032



Befestigungssatz - Wandkipp-Set aus AISI 304-Stahl
Material:Stahl AISI 304, farbe:Stahl.


Code
C-K400168



Befestigungssatz - Wandkipp-Set aus AISI 304-Stahl
Material:Stahl AISI 304, farbe:Stahl.

Code
C-K400169

Rubber 3D RGBW | LED Strip | Accessories
C0016VDI05004




Erdspießen - ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG
D114X204 für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
83351



Befestigungssatz - Bodenpfahl mit kippbarer Halterung

Code
C-F500004




Befestigungssatz - Bodenpfahl mit kippbarer Halterung

Code
C-F500005




Endkappe
Material:, farbe:Transparent.

Code
99539




Lochschablone
Material:Aluminium, farbe:Polished aluminium.

Code
C-V200005




Profil
Material:UV beständiges Polycarbonat, farbe:Transparent.

Code
C-K100021



Profil
Material:UV beständiges Polycarbonat, farbe:Transparent.


Code
C-K100022



Elektronisches Zubehör - Track?System?Netzteil für Rubber 3D
installationsposition: decke L=218mm, H=42mm, D=31mm.
Material:Kunststoff ABS, farbe:Weiß.

Code
C-E300007

Rubber 3D RGBW | LED Strip | Accessories
C0016VDI05004



Elektronisches Zubehör - Track?System?Netzteil für Rubber 3D
installationsposition: decke L=218mm, H=42mm, D=31mm.
Material:Kunststoff ABS, farbe:Black.

Code
C-E300008



Strip Service - Doppelseitiges Klebeband 33 Meter

Code
99520




Kabelklemme
Material:Kunststoff ABS, farbe:Black.

Code
C-W300001




Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 2000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200005




Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 2000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200006




Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D 48V, Rubber 3D RGBW
Länge 5000 mm; isolierung doppio; querschnitt 0,35 mm²; farben: weiß - schwarz - blau - grün - rot.

Code
C-W200011



Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

Code
C-W600001



Dimmer - Smart_PRO CV | RF Fernbedienungs Controller WiFi – Eingang 12/24/48V – Ausgang: 3A
× 4 Kanäle 12/24/48V
RF Remote controller

Code
C-E700002

Rubber 3D RGBW | LED Strip | Accessories

C0016VDI05004
