


Downlights | 1 arrayLED 11 W DC 300 mA | CRI 90
C00180BBWFL



Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Flood
Light emission direction	downward
Lampe Nennleistung	11 W DC
Lichtstrom (Lichtquelle)	1578 lm
Eingangsspannungsbereich	300mA
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP44
IP optisches System	IP65
IK	IK05
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Ja
Gesamtwinkel (vertikale Ebene)	60 °
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.15 m
Harzbeschichtung	Nein
Einbautiefe	74 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.3 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse

Material	UV beständiges Polycarbonat
Farbe	Text black RAL9005
Bearbeitungstyp	Flüssiglackierung

Oberfläche Oberfläche diffusor

Material	UV beständiges Polycarbonat
Farbe	Transparent

Oberfläche Oberfläche strahler

Material	Stranggepresstes Aluminium EN AB - 46100
Bearbeitungstyp	Trommelung

Elektronik

	99734 Multi Power 198-264V AC / 180-275V DC (1 art.)
---	---

	99732 1-10V Multi Power 198-264V AC / V DC (1 art.)
---	--

	83322 Push and Simply Dim - DALI-2 Controller (1 art.)
---	---

Cables Electrification

Cable connector	MALE JST SMR-02V-B
-----------------	--------------------

Downlights | 1 arrayLED 11 W DC 300 mA | CRI 90
C00180BBWFL

Single emission recessed downlights for indoor application. The warm white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1578 lm, with a 143.5 lm/W nominal luminous efficacy.


The device body is made of uv resistant polycarbonate and features a text black ral9005 finish, processed by means of liquid painting; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP44; the total weight is of 0.3 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 11 W The power supply cable is included and features a 0.15 m length.

The device features protection class III and can be ceiling-mounted, with a 66 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

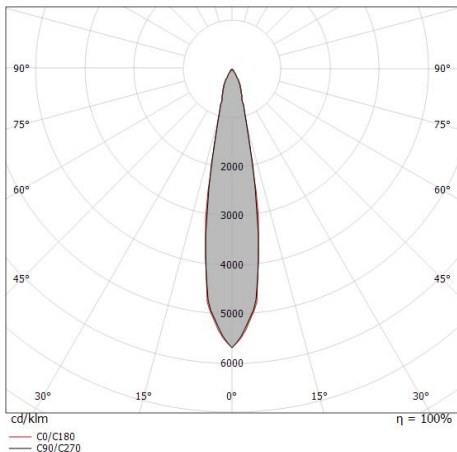

0.5	0.18 0.18	E(0°) E(C90) E(C0)	22332 10682 10658
1.0	0.36 0.37	E(0°) E(C90) E(C0)	5583 2671 2664
1.5	0.54 0.55	E(0°) E(C90) E(C0)	2481 1187 1184
2.0	0.72 0.73	E(0°) E(C90) E(C0)	1396 668 666
2.5	0.90 0.92	E(0°) E(C90) E(C0)	893 427 426
3.0	1.08 1.10	E(0°) E(C90) E(C0)	620 297 296

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 20.8°)
— C90/C270 (Half-peak divergence: 20.4°)

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	62 %
Lichtstrom (Lichtquelle)	1578 lm
Leuchten Lichtstrom	982 lm
Consumption	11 W
Leuchten Lichtausbeute	89 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	90 Ra
Colour Rendering Index	60 R9
Black Body Locus	On
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 231262h (at Tj 65 Ta 25)

L80 B10 C0 144799h (at Tj 65 Ta 25)

L90 B10 C0 68534h (at Tj 65 Ta 25)

UGR

UGR transversal	15.1
UGR axial	15
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	20°
Light distribution simmetry	Symmetrical

