


| CRI 90
C00259CHWWF



Technische Daten	
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Wide Flood
Light emission direction	downward
Lampe Nennleistung	1 W DC
Lichtstrom (Lichtquelle)	154 lm
Eingangsspannungsbereich	350mA
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP44
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.12 m
Harzbeschichtung	Nein
Einbautiefe	24 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.028 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse

Material	Messing OT58
Farbe	Polished (galvanic) chrome
Bearbeitungstyp	Elektrolytische Verchromung

Oberfläche Oberfläche diffusor

Material	Polymethylmethacrylat UV-beständige
Farbe	Transparent

Elektronik

 89144
On/Off Driver 198-264V AC / 180-275V DC

 89145
On/Off Driver 198-264V AC / 180-275V DC

 99375
On/Off Driver 198-264V AC

 C-E100010
1-10V - 0-10V Controller

 C-E100011
Push and Simply Dim - DALI-2 Controller

Cables Electrification

Cable connector	No connector - PVC Cable 2x0.35mm ² (Red/Black)
-----------------	--

| CRI 90
C00259CHWWF

Single emission recessed downlights for indoor application. The warm white LED light source with a wide flood light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 154 lm, with a 154.0 lm/W nominal luminous efficacy.



The device body is made of brass ot58 and features a polished (galvanic) chrome finish, processed by means of galvanic chromium plating; the diffuser is made of uv resistant polymethylmethacrylate.

The ingress protection degree is IP44; the total weight is of 0.028 kg. The power supply driver is not provided and is to be ordered separately.


The total absorbed power is 1 W The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 84916(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

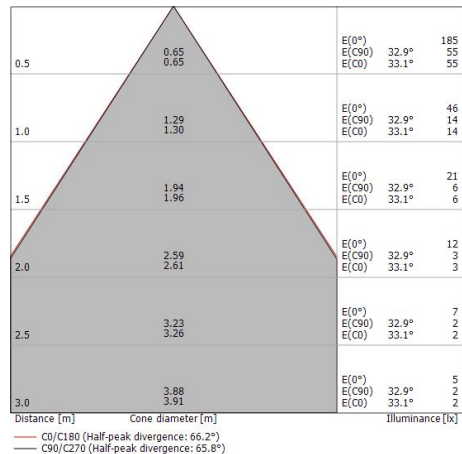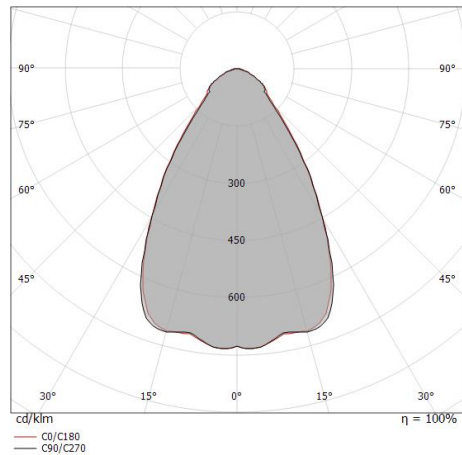

Bibok | Downlights | Accessories
C00259CHWWF

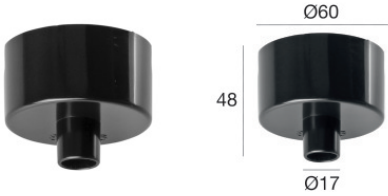

Einbaugehäuse
installationsposition: decke; typ installation: mauerwerk L=48mm, H=60mm, D=60mm.
Material:Kunststoff ABS, farbe:Black.

Code
84916