


Uplights | 1 x powerLEDs 4.5 W DC 500 mA | CRI 80  
**C00270GGWRU**



| Technische Daten                                    |                                  |
|-----------------------------------------------------|----------------------------------|
| Typ                                                 | Oberfläche                       |
| Installationsposition                               | Boden                            |
| Installationsumgebung                               | Outdoor                          |
| Lichtquelle                                         | LED                              |
| Circuit structure                                   | powerLEDs                        |
| Optik                                               | Radial Mono-directional emission |
| Light emission direction                            | external                         |
| Lampe Nennleistung                                  | 4.5 W DC                         |
| Lichtstrom (Lichtquelle)                            | 575 lm                           |
| Eingangsspannungsbereich                            | 500mA                            |
| Ähnlichste Farbtemperatur / Tone                    | 3000 K                           |
| Farbwiedergabeindex                                 | 80 Ra                            |
| Gleichstrom/Gleichspannung                          | CC                               |
| Isolierklasse                                       | 3                                |
| IP                                                  | IP67                             |
| IK                                                  | IK10                             |
| Glühdrahtprüfung                                    | 850°                             |
| Direkte Montage auf normal entflammaren Oberflächen | Ja                               |
| CE                                                  | Ja                               |
| Einschließlich Driver                               | Nein                             |
| Leuchte dimmbar                                     | DALI - 1-10V                     |
| Schwenkbarkeit                                      | Nein                             |
| Drehbarkeit                                         | Nein                             |
| Begehrbarkeit                                       | Ja                               |
| Überrollbarkeit                                     | 2000 Kg                          |
| Einschließlich Kabel                                | Ja                               |
| Kabellänge                                          | 3 m                              |
| Harzbeschichtung                                    | Ja                               |
| Typ Lichtabstrahlung                                | Einflammig                       |
| Nettogewicht                                        | 0.3 Kg                           |
| Schutz vor elektrostatischen Entladungen            | Nein                             |
| Schutz vor Stoßspannungen                           | Nein                             |
| Technische Merkmale des Produkts                    | Acquastop                        |

#### Oberfläche Oberfläche Gehäuse

|                 |                                             |
|-----------------|---------------------------------------------|
| Material        | Aluminiumlegierung 6060                     |
| Farbe           | Text brilliant grey RAL 9006                |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

#### Oberfläche Oberfläche diffusor

|          |                              |
|----------|------------------------------|
| Material | Extra-helles Glas - Gehärtet |
| Farbe    | Transparent                  |

#### Elektronik



99185  
On/Off Driver 198-264V AC (2 - 4 art.)



C-E200003  
Push and Simply Dim - DALI-2 Controller (1 - 4 art.)



C-E200007  
On/Off Driver 198-264V AC / V DC (1 - 2 art.)

Uplights | 1 x powerLEDs 4.5 W DC 500 mA | CRI 80  
C00270GGWRU

Single emission uplights for outdoor application. The warm white LED light source with a radial mono-directional emission light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 575 lm, with a 127.8 lm/W nominal luminous efficacy.


The device body is made of aluminium alloy 6060 and features a text brilliant grey ral 9006 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP67; the total weight is of 0.3 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4.5 W The power supply cable is included and features a 3 m length.

The device features protection class III and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

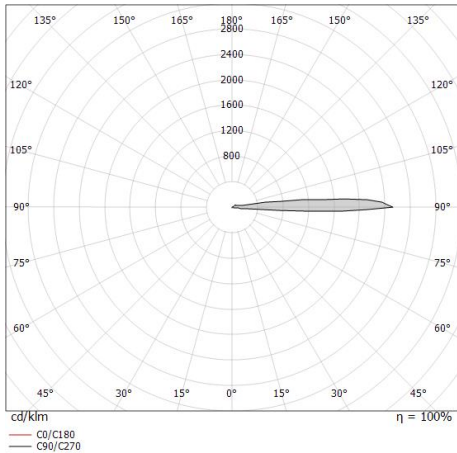

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

|                                       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 9 %            |
| Lichtstrom (Lichtquelle)              | 575 lm         |
| Leuchten Lichtstrom                   | 55 lm          |
| Consumption                           | 4.5 W          |
| Leuchten Lichtausbeute                | 12 lm/W        |
| Farbtemperatur                        | 3000 K         |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex                   | 80 Ra          |
| Standardumgebungstemperatur           | -20 / +50°C    |
| Typische Temperatur am Glas           | 40°C           |

LED Life / Failure Ratio

L70 B10 C0 363000h (at Tj 65 Ta 25 )

L80 B10 C0 237566h (at Tj 65 Ta 25 )

L90 B10 C0 151000h (at Tj 65 Ta 25 )

OPTICAL

|                             |             |
|-----------------------------|-------------|
| Optik C0/C180               | 180°        |
| Light distribution simmetry | Symmetrical |