

Downlights | 1 x powerLED 2 W DC 630 mA | CRI 90
C00273ISWMW

Single emission recessed downlights for indoor application. The warm white LED light source with a medium wide flood light distribution is composed of 1 poweredLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 212 lm, with a 106.0 lm/W nominal luminous efficacy.



The device body is made of stainless steel and features a steel finish, processed by means of shot peening. The robust steel structure enhances the fixture's design and ensures long-lasting performance, even in the most demanding environments.

The ingress protection degree is IP44; the total weight is of 0.07 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2 W The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be wall lights or ceiling-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84901(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

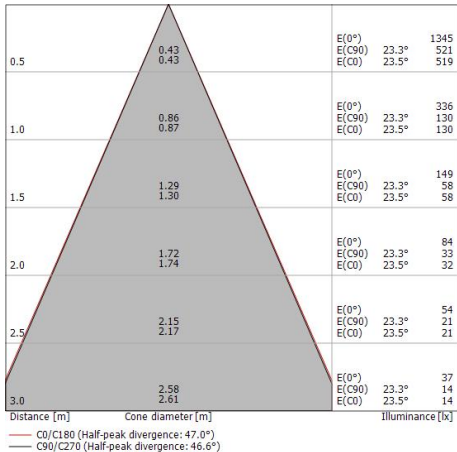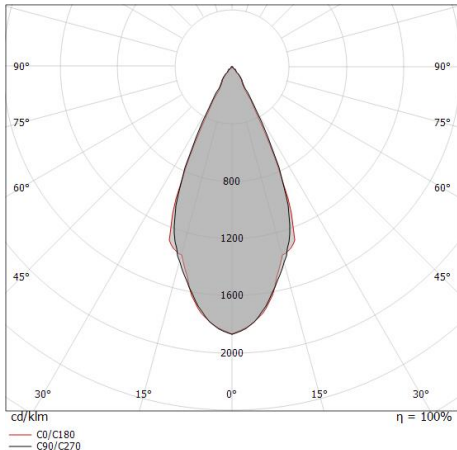

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	84 %
Lichtstrom (Lichtquelle)	212 lm
Leuchten Lichtstrom	180 lm
Consumption	2,0 W
Leuchten Lichtausbeute	90 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 214455h (at Tj 65 Ta 25)

L80 B10 C0 136355h (at Tj 65 Ta 25)

L90 B10 C0 67466h (at Tj 65 Ta 25)


UGR

UGR axial	16.7
UGR transversal	16.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	47°
Light distribution simmetry	Symmetrical

Nitum_R | Downlights | Accessories
C00273ISWMW



Einbaugehäuse
installationsposition: decke; typ installation: mauerwerk L=69mm, H=60mm, D=60mm.
Material:Kunststoff ABS, farbe:Black.

Code
84901