

Wandleuchten - Lineare Elemente | 85-277 V | 72 topLED 22.5 W DC - 29 W AC | RGBW - 3000
C00528AMVDI

Single emission wall lights or lines for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 72 topLEDs with CCT of RGB-W 3000 K the source luminous flux is 936 lm, with a 41.6 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of pmma. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.



The ingress protection degree is IP66; the total weight is of 1.3 kg.

The total absorbed power is 22.5 W The power supply cable is included and features a 0.25 m length.


The device features protection class II and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	491 lm
Consumption	29 W
Leuchten Lichtausbeute	16 lm/W
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	45°C
UGR	
UGR axial	24
UGR transversal	23.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	116°
Light distribution simmetry	Symmetrical

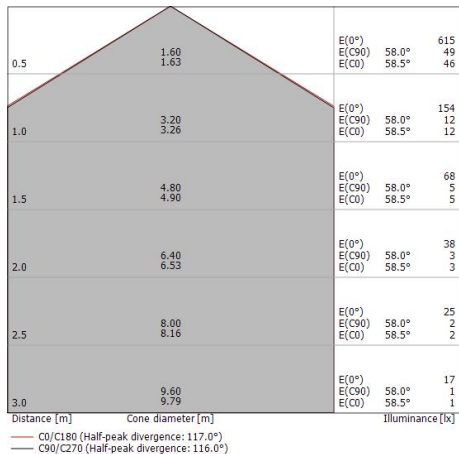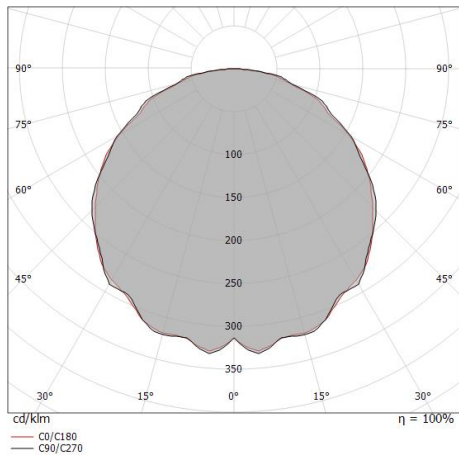

Xenia_W RGBW DMX | Lines | Accessories
C00528AMVDI

		Blendschutz - Blendschutzblende Blendschutzart: palpebra. Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.	Code <u>98952</u>
		Klammer installationsposition: wand, decke, boden L=95.6mm, H=45mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code <u>89045</u>
		Klammer installationsposition: wand, decke, boden L=155.6mm, H=45mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code <u>89046</u>
		Klammer installationsposition: wand, decke, boden L=305.6mm, H=60mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code <u>89047</u>
		Klammer installationsposition: wand, decke, boden L=35mm, H=72.8mm, D=36.5mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code <u>98949</u>
		Klammer installationsposition: wand, decke L=52mm, H=43mm, D=75mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code <u>C-F400006</u>
		Kabel und Stecker Typ Kabel power + signal cable allinone; Länge 1500 mm; isolierung doppio con schermatura per segnale.	Code <u>C-W200013</u>
		Kabel und Stecker Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale.	Code <u>C-W200014</u>

Xenia_W RGBW DMX | Lines | Accessories
C00528AMVDI



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 500 mm; isolierung doppio con schermatura per segnale.

Code
C-W200015



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 1500 mm; isolierung doppio con schermatura per segnale.

Code
C-W200016



Kabel und Stecker
Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale.

Code
C-W200017



Stecker
Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.

Code
C-W200018



Stecker
Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.

Code
C-W200019




Endkappe - Adapterkappe für DMX-Leitungsverschluss

Code
C-W400005



2X



Klammer
installationsposition: wand L=32mm, H=23mm, D=25mm.
Material:Stahl AISI 304, farbe:Stahl.

Code
C-F400008