

Wandleuchten - Lineare Elemente | 12 x powerLEDs 24.3 W DC 630 mA | CRI 80
C00532AMN3F

Single emission wall lights or lines for outdoor application. The natural white LED light source with a elliptic flood (20°±29°) x >60° light distribution is composed of 12 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 3408 lm, with a 140.2 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of pmma. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP66; the total weight is of 1.3 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 24.3 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	78 %
Lichtstrom (Lichtquelle)	3408 lm
Leuchten Lichtstrom	2673 lm
Consumption	24 W
Leuchten Lichtausbeute	111 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 1240219h (at Tj 65 Ta 25)

L80 B10 C0 745627h (at Tj 65 Ta 25)



L90 B10 C0 309367h (at Tj 65 Ta 25)

UGR


UGR axial	25
UGR transversal	28.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	29°
Optik C0/C180	92°
Light distribution simmetry	Symmetrical 2 assis

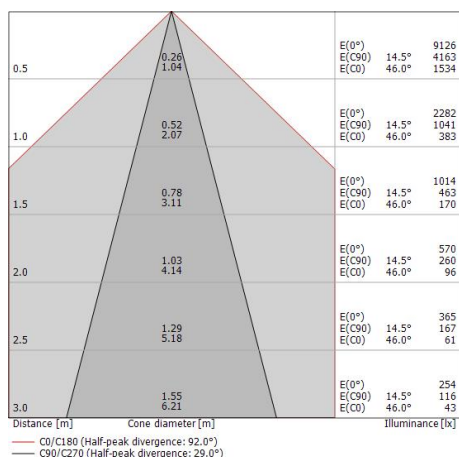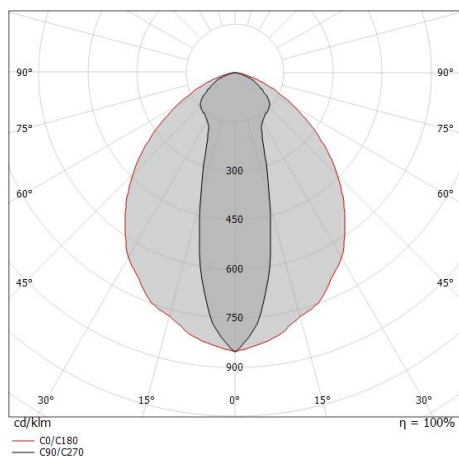

Xenia_W | Lines | Accessories
C00532AMN3F

 	Klammer installationsposition: wand, decke, boden L=95.6mm, H=45mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code 89045
	Klammer installationsposition: wand, decke, boden L=155.6mm, H=45mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code 89046
	Klammer installationsposition: wand, decke, boden L=305.6mm, H=60mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code 89047
	Klammer installationsposition: wand, decke, boden L=35mm, H=72.8mm, D=36.5mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code 98949
	Blendschutz - Blendschutzblende Blendschutzart: palpebra. Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.	Code 98785
 2X 	Klammer installationsposition: wand L=32mm, H=23mm, D=25mm. Material:Stahl AISI 304, farbe:Stahl.	Code C-F400008