


Lineare Elemente | 3 x powerLEDs 4.5 W DC 500 mA

CRI 80

C00652AMAWW

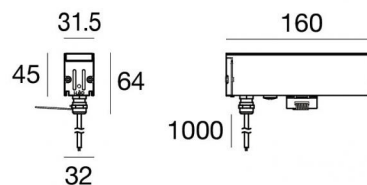

Technische Daten	
Typ	Frame
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	powerLEDs
Optik	Asymmetric Wallwasher
Light emission direction	upward
Lampe Nennleistung	4.5 W DC
Lichtstrom (Lichtquelle)	453 lm
Eingangsspannungsbereich	500mA
Ähnlichste Farbtemperatur / Tone	2200 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP68
Installationsbeschränkung	Nicht für Einsatz unter Wasser
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Ja
Überrollbarkeit	2000 Kg
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflamig
Nettogewicht	0.440 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse

Material	Aluminiumlegierung 6060
Farbe	Anodised aluminium
Bearbeitungstyp	Anodisierung 15 µm

Oberfläche Oberfläche diffusor

Material	Extra-helles Glas - Gehärtet
Farbe	Transparent
Bearbeitungstyp	Siebdruck

Elektronik

99185
On/Off Driver 198-264V AC (2 - 4 art.)



C-E200003
Push and Simply Dim - DALI-2 Controller (1 - 4 art.)



C-E200007
On/Off Driver 198-264V AC / V DC (1 - 2 art.)

Lineare Elemente | 3 x powerLEDs 4.5 W DC 500 mA | CRI 80
C00652AMAWW

Single emission lines for outdoor application. The ancient white LED light source with a asymmetric wallwasher light distribution is composed of 3 powerled LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 453 lm, with a 100.7 lm/W nominal luminous efficacy.



The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP68; the total weight is of 0.440 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4.5 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 99926(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

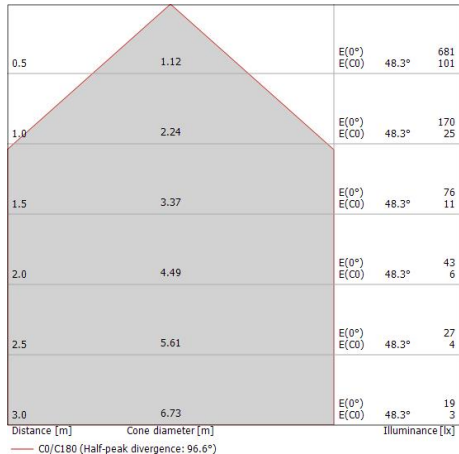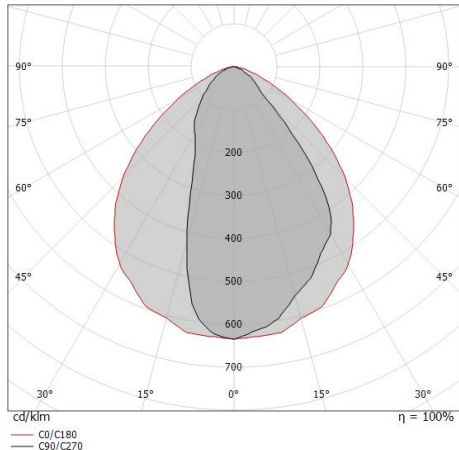

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	59 %
Lichtstrom (Lichtquelle)	453 lm
Leuchten Lichtstrom	269 lm
Consumption	4.5 W
Leuchten Lichtausbeute	59 lm/W
Farbtemperatur	2200 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 214455h (at Tj 65 Ta 25)




L80 B10 C0 136355h (at Tj 65 Ta 25)

L90 B10 C0 67466h (at Tj 65 Ta 25)

OPTICAL

Optik C0/C180	97°
Light distribution simmetry	Asymmetrical

Xenia_AF PRO | Lines | Accessories
C00652AMAWW

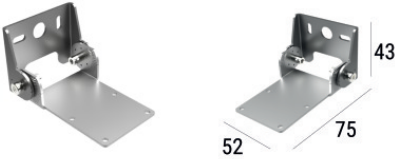	Einbaugehäuse installationsposition: boden; typ installation: mauerwerk L=160mm, H=78.7mm, D=71.1mm	Code <u>99926</u>
	Endkappe Material:Aluminiumlegierung 6060, farbe:Aluminium.	Code <u>99917</u>
	Klammer installationsposition: wand, decke, boden L=35mm, H=72.8mm, D=36.5mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code <u>98949</u>
	Klammer installationsposition: wand, decke L=52mm, H=43mm, D=75mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code <u>C-F400006</u>
	Schlüssel - Zubehör zur Demontage der Leuchte Xenia (2 Stück) Material:Stahl AISI 304, farbe:Stahl.	Code <u>C-V500001</u>