


Uplights - Step-Leuchten | arrayLED 0 W DC 24 V

CRI 80

C00763SAWSP

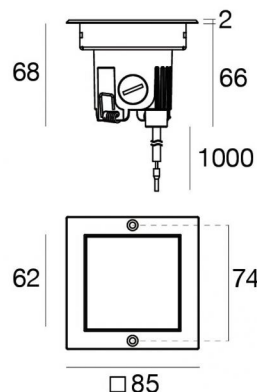

| Technische Daten                                    |                             |
|-----------------------------------------------------|-----------------------------|
| Typ                                                 | Überrollbar - Step-Leuchten |
| Installationsposition                               | Wand - Boden                |
| Installationsumgebung                               | Outdoor                     |
| Lichtquelle                                         | LED                         |
| Circuit structure                                   | arrayLED                    |
| Optik                                               | Spot                        |
| Light emission direction                            | upward                      |
| Lampe Nennleistung                                  | 5 W DC                      |
| Lichtstrom (Lichtquelle)                            | 630 lm                      |
| Eingangsspannungsbereich                            | 350mA                       |
| Ähnlichste Farbtemperatur / Tone                    | 3000 K                      |
| Farbwiedergabeindex                                 | 80 Ra                       |
| Gleichstrom/Gleichspannung                          | CV                          |
| Isolierklasse                                       | 3                           |
| IP                                                  | IP67                        |
| IK                                                  | IK10                        |
| Glühdrahtprüfung                                    | 850°                        |
| Direkte Montage auf normal entflammaren Oberflächen | Ja                          |
| CE                                                  | Ja                          |
| Einschließlich Driver                               | Nein                        |
| C.V. - C.C. Converter                               | 24 V Konverter enthalten    |
| Leuchte dimmbar                                     | DALI - 1-10V                |
| Schwenkbarkeit                                      | Nein                        |
| Drehbarkeit                                         | Nein                        |
| Begehbarkeit                                        | Ja                          |
| Überrollbarkeit                                     | 2000 Kg                     |
| Einschließlich Kabel                                | Ja                          |
| Kabellänge                                          | 1 m                         |
| Harzbeschichtung                                    | Ja                          |
| Einbautiefe                                         | 66 mm                       |
| Typ Lichtabstrahlung                                | Einflammig                  |
| Nettogewicht                                        | 0.45 Kg                     |
| Schutz vor elektrostatischen Entladungen            | Nein                        |
| Schutz vor Stoßspannungen                           | Nein                        |
| Optiktechnologie                                    | Dark light                  |
| Technische Merkmale des Produkts                    | Acquastop                   |

**Oberfläche Oberfläche Gehäuse**

|                 |                                             |
|-----------------|---------------------------------------------|
| Material        | Stranggepresstes Aluminium EN AB - 46100    |
| Farbe           | Matt black (R9005)                          |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

**Oberfläche Oberfläche diffusor**

|                 |                              |
|-----------------|------------------------------|
| Material        | Extra-helles Glas - Gehärtet |
| Farbe           | transparent                  |
| Bearbeitungstyp | Siebdruck                    |

**Oberfläche Oberfläche flansch**

|                 |                    |
|-----------------|--------------------|
| Material        | Edelstahl AISI 316 |
| Farbe           | Stahl              |
| Bearbeitungstyp | Bürsten            |

**Elektronik**

89488  
On/Off Driver 190-250V AC / 180-275V DC 14.4 W



89179  
On/Off Driver 198-264V AC 24 W



89359  
On/Off Driver 198-264V AC / V DC



99331  
On/Off Driver 198-264V AC / 176-275V DC 150 W



99660  
DALI - 1-10V Controller V DC



C-E500023  
DALI - 1-10V - Push and Simply Dim Controller V DC

**Cables Electrification**

|                 |    |
|-----------------|----|
| Cable connector | No |
|-----------------|----|

Uplights - Step-Leuchten | arrayLED 0 W DC 24 V | CRI 80  
C00763SAWSP

Single emission uplights for outdoor application. The warm white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 630 lm, with a 126.0 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.


The device body is made of die-cast aluminium en ab - 46100 and features a matt black (r9005) finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard. The product flange is made of steel, a material that ensures high robustness, superior mechanical strength and extended durability, guaranteeing maximum component reliability over time.

The ingress protection degree is IP67; the total weight is of 0.45 kg.

The total absorbed power is 5 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights or floor-mounted with an outer casing, code 83411(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.


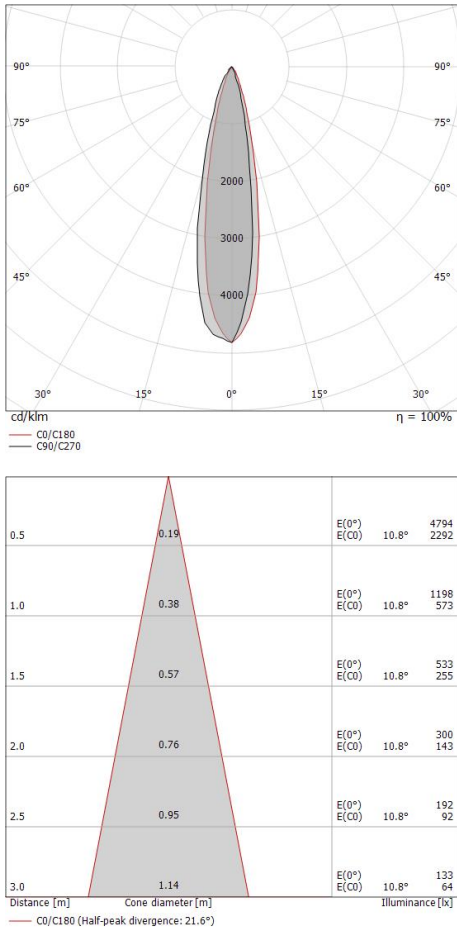


| Energieeffizienzklasse                                                |  |
|-----------------------------------------------------------------------|--|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E. |  |


| Illuminotechnical Eigenschaften       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 39 %           |
| Lichtstrom (Lichtquelle)              | 630 lm         |
| Leuchten Lichtstrom                   | 249 lm         |
| Consumption                           | 5 W            |
| Leuchten Lichtausbeute                | 49 lm/W        |
| Farbtemperatur                        | 3000 K         |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex                   | 80 Ra          |
| Black Body Locus                      | On             |
| Standardumgebungstemperatur           | -20 / +50°C    |
| Typische Temperatur am Glas           | 50°C           |

| LED Life / Failure Ratio |  |
|--------------------------|--|
| L70 B10 C0 130200h       |  |

| OPTICAL                     |              |
|-----------------------------|--------------|
| Optik C0/C180               | 22°          |
| Light distribution simmetry | Asymmetrical |

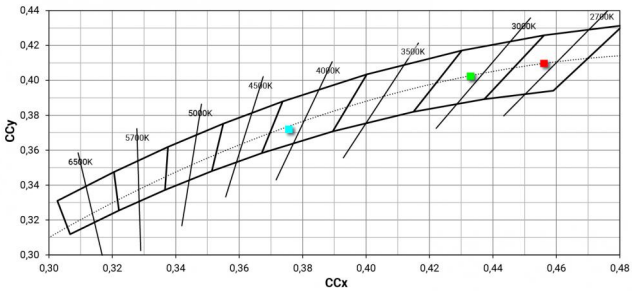

Orma\_Q | Step Lights | Accessories  
C00763SAWSP



Einbaugehäuse  
installationsposition: boden; typ installation: mauerwerk L=97mm, H=93mm, D=97mm.  
Material:Kunststoff ABS, farbe:Black.

Code  
83411