

Scheinwerfer | 180-264 V AC /230-280 V DC | 1 x powerLED 2 W DC - 3 W AC | CRI 80
C00777WHWHS

Single emission projectors for outdoor application. The warm white LED light source with a hyper spot light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 186 lm, with a 93.0 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.


The device body is made of die-cast aluminium en ab - 46100 and features a text white ral9003 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP66; the total weight is of 1 kg.

The total absorbed power is 3 W The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

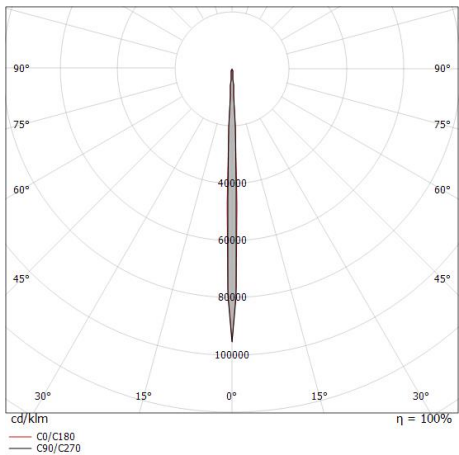

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	87 %
Lichtstrom (Lichtquelle)	186 lm
Leuchten Lichtstrom	162 lm
Consumption	3 W
Leuchten Lichtausbeute	54 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 153514h (at Tj 65 Ta 25)

L80 B10 C0 98900h (at Tj 65 Ta 25)

L90 B10 C0 50727h (at Tj 65 Ta 25)

OPTICAL


Optik C0/C180	4°
Light distribution simmetry	Symmetrical

Periskop80 | Projectors | Accessories
C00777WHWHS



Blendschutz
Blendschutzart: palpebra.
Material:Stahl AISI 304, farbe:Text black RAL9005, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

Code
C-U300023




Erdspießen
installationsposition: terreno,Material Verkleidung: pc

Code
98549



Befestigungssatz - Befestigungsgurt zur Montage am Baum – Länge 5 Meter
Material:Edelstahl AISI 316, farbe:Stahl.

Code
99802



Blendschutz
Blendschutzart: snoot.
Material:Aluminiumlegierung 6060, farbe:Text black RAL9005, bearbeitungstyp :Offenporige Anodisierung + Pulverlackierung.

Code
C-U300026