


Systeme | 198-264 V AC /180-280 V DC
204 topLED 23 W DC - 25 W AC | Modular | CRI 90
C00800BBWDZ

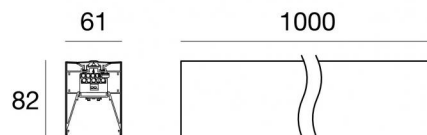

Technische Daten	
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffused + No Optic
Light emission direction	downward and upward
Lampe Nennleistung	23 W DC
Gesamtleistung	25 W
Lichtstrom (Lichtquelle)	3635 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	1.1 Kg
Modularity	Modular
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	2 KV
Optiktechnologie	Dot free

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Text black RAL9005
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Systeme | 198-264 V AC /180-280 V DC | 204 topLED 23 W DC - 25 W AC | Modular | CRI
90 | + CU200008
C00800BBWDZ

Double emission systems for indoor application. The warm white LED light source with a diffused + no optic light distribution is composed of 204 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3635 lm, with a 158.0 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 1.1 kg.

The total absorbed power is 25 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.



Energieeffizienzklasse
Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	82 %
Lichtstrom (Lichtquelle)	3635 lm
Leuchten Lichtstrom	3004 lm
Consumption	25 W
Leuchten Lichtausbeute	120 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 494435h (at Tj 65 Ta 25)
L80 B10 C0 310287h (at Tj 65 Ta 25)
L90 B10 C0 147586h (at Tj 65 Ta 25)

UGR	
UGR axial	19.9
UGR transversal	22
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	129°
Light distribution simmetry	Symmetrical 2 assis

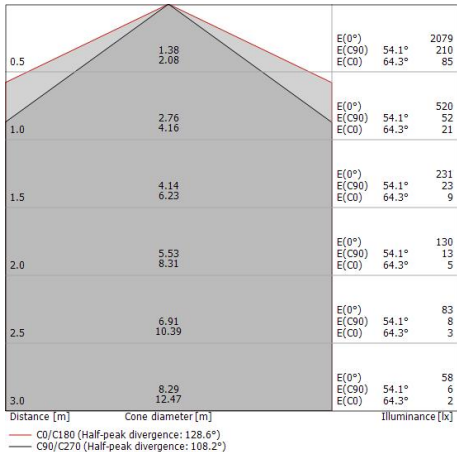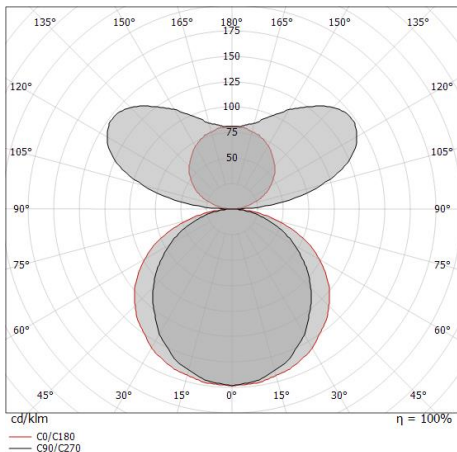

Systeme | 198-264 V AC /180-280 V DC | 204 topLED 23 W DC - 25 W AC | Modular | CRI
90 | + CU200012
C00800BBWDZ

Double emission systems for indoor application. The warm white LED light source with a diffused + no optic light distribution is composed of 204 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3635 lm, with a 158.0 lm/W nominal luminous efficacy.


The device body is made of aluminium alloy 6060 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 1.1 kg.

The total absorbed power is 25 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

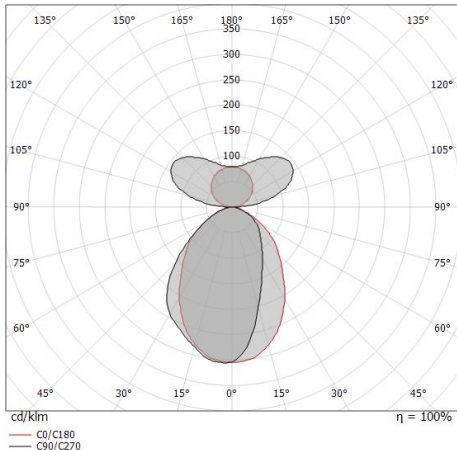

Energieeffizienzklasse	
Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse E.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	84 %
Lichtstrom (Lichtquelle)	3635 lm
Leuchten Lichtstrom	3084 lm
Consumption	25 W
Leuchten Lichtausbeute	123 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C
LED Life / Failure Ratio	
L70 B10 C0 494435h (at Tj 65 Ta 25)	
L80 B10 C0 310287h (at Tj 65 Ta 25)	
L90 B10 C0 147586h (at Tj 65 Ta 25)	
UGR	
UGR axial	19.9
UGR transversal	22
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	80°
Light distribution simmetry	Asymmetrical

Systeme | 198-264 V AC /180-280 V DC | 204 topLED 23 W DC - 25 W AC | Modular | CRI

90 | + CU200014

C00800BBWDZ

Double emission systems for indoor application. The warm white LED light source with a diffused + no optic light distribution is composed of 204 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3635 lm, with a 158.0 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 1.1 kg.

The total absorbed power is 25 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.



Energieeffizienzklasse
Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	77 %
Lichtstrom (Lichtquelle)	3635 lm
Leuchten Lichtstrom	2799 lm
Consumption	25 W
Leuchten Lichtausbeute	111 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C









LED Life / Failure Ratio
L70 B10 C0 494435h (at Tj 65 Ta 25)
L80 B10 C0 310287h (at Tj 65 Ta 25)
L90 B10 C0 147586h (at Tj 65 Ta 25)

UGR	
UGR axial	14.3
UGR transversal	14.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20


OPTICAL	
Optik C90/C270	65°
Optik C0/C180	72°
Light distribution simmetry	Symmetrical 2 assis

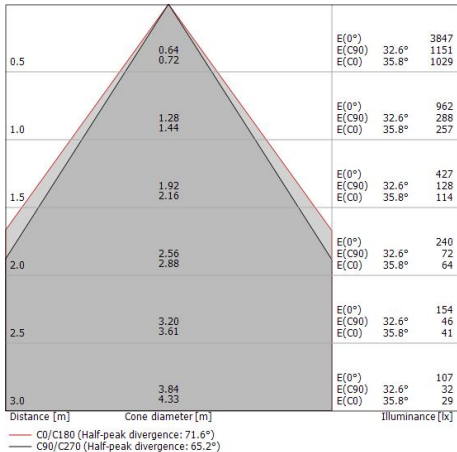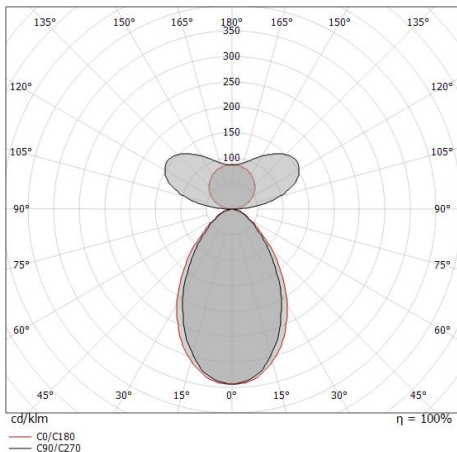

Rollip60_MP | Systems | Accessories
C00800BBWDZ

		Diffusor - Asymmetrisch - Länge 1.5m Diffusorart: asymmetric diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>C-U200038</u>
		Diffusor - Asymmetrisch - Länge 2m Diffusorart: asymmetric diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>C-U200039</u>
		Diffusor - Asymmetrisch - Länge 3m Diffusorart: asymmetric diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>C-U200040</u>
		Diffusor - Asymmetrisch - Länge 5m Diffusorart: asymmetric diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>C-U200012</u>
		Diffusor - Asymmetrisch - Länge 10m Diffusorart: asymmetric diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>C-U200013</u>
		Diffusor - Opal - Länge 1.5m Diffusorart: opal diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>C-U200041</u>
		Diffusor - Opal - Länge 2m Diffusorart: opal diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>C-U200042</u>
		Diffusor - Opal - Länge 3m Diffusorart: opal diffuser. Material:UV beständiges Polycarbonat, farbe:Opal.	Code <u>C-U200043</u>

Rollip60_MP | Systems | Accessories
C00800BBWDZ




Diffusor - Opal – Länge 5 m

Diffusorart: opal diffuser.

Material:UV beständiges Polycarbonat, farbe:Opal.

Code

C-U200008




Diffusor - Opal – Länge 10m

Diffusorart: opal diffuser.

Material:UV beständiges Polycarbonat, farbe:Opal.

Code

C-U200009




Diffusor - Opal – Länge 20m

Diffusorart: opal diffuser.

Material:UV beständiges Polycarbonat, farbe:Opal.

Code

C-U200010




Diffusor - Blendfreier Diffusor – Länge 1.5m

Diffusorart: anti-glare diffuser.

Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

Code

C-U200044




Diffusor - Blendfreier Diffusor – Länge 2m

Diffusorart: anti-glare diffuser.

Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

Code

C-U200045




Diffusor - Blendfreier Diffusor – Länge 3m

Diffusorart: anti-glare diffuser.

Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

Code

C-U200046




Diffusor - Blendfreier Diffusor – Länge 5m

Diffusorart: anti-glare diffuser.

Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

Code

C-U200014



Diffusor - Blendfreier Diffusor – Länge 10m



Diffusorart: anti-glare diffuser.

Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

Code


C-U200015

Rollip60_MP | Systems | Accessories
C00800BBWDZ



Endkappe
Material:Stranggepresstes Aluminium EN AB - 46100, farbe:Text black RAL9005, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

Code
C-V400018



Drahtabdeckung - Power-Kit - Doppelte Emission - On/off
Material:Eisen, farbe:Text black RAL9005, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.

Code
63302



Hängeleuchten - Enthält ein einzelnes Aufhängekabel (KIT). Für das Startmodul werden 2 KITS benötigt, für die weiteren Module 1 KIT pro Modul.
Material:Stahl, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
C-F100021