



Wandleuchten | 1 x powerLED 1 W DC 350 mA | CRI 80
C00943BBAWW



□ 50



42

Technische Daten	
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Asymmetric Wallwasher
Light emission direction	downward
Lampe Nennleistung	1 W DC
Lichtstrom (Lichtquelle)	111 lm
Eingangsspannungsbereich	350mA
Ähnlichste Farbtemperatur / Tone	2200 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.17 m
Harzbeschichtung	Nein
Einbautiefe	22.5 mm
Typ Lichtabstrahlung	Einflamig
Nettogewicht	0.027 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Technische Merkmale des Produkts	TVS

Oberfläche Oberfläche Gehäuse

Material	Stranggepresstes Aluminium EN AB - 46100
Farbe	Grau
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Oberfläche Oberfläche diffusor

Material	Extra-helles Glas - Gehärtet
Farbe	Transparent

Oberfläche Oberfläche flansch

Material	UV beständiges Polycarbonat
Farbe	Text black RAL9005
Bearbeitungstyp	Flüssiglackierung

Elektronik

89144
On/Off Driver 198-264V AC / 180-275V DC (1 - 2 art.)

89145
On/Off Driver 198-264V AC / 180-275V DC (3 - 6 art.)

99375
On/Off Driver 198-264V AC (6 - 12 art.)

C-E100010
1-10V - 0-10V Controller (3 - 4 art.)

C-E100011
Push and Simply Dim - DALI-2 Controller (3 - 4 art.)

Cables Electrification

Cable connector No connector - PVC 2x0.35mm²

Wandleuchten | 1 x powerLED 1 W DC 350 mA | CRI 80
C00943BBAWW

Single emission wall lights for indoor application. The ancient white LED light source with a asymmetric wallwasher light distribution is composed of 1 powered LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 111 lm, with a 111.0 lm/W nominal luminous efficacy.



The device body is made of die-cast aluminium en ab - 46100 and features a grey finish, processed by means of powder coating with thermosetting powders; the diffuser is made of extra clear glass - tempered.

The ingress protection degree is IP40; the total weight is of 0.027 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W The power supply cable is included and features a 0.17 m length.

The device features protection class III and can be wall lights-mounted, with a 42 x 42 mm hole (in plasterboard) with an outer casing, code 99850(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

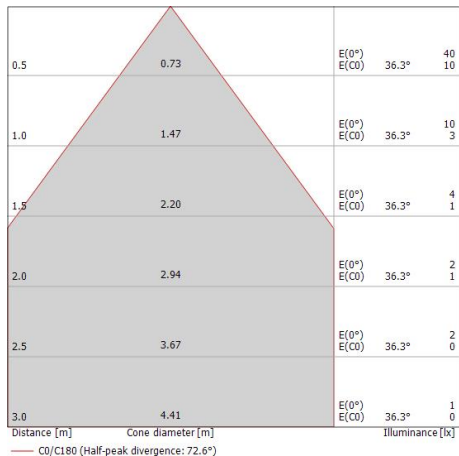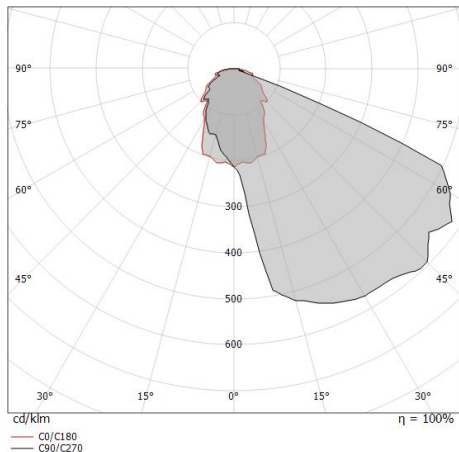

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	42 %
Lichtstrom (Lichtquelle)	111 lm
Leuchten Lichtstrom	47 lm
Consumption	1,0 W
Leuchten Lichtausbeute	47 lm/W
Farbtemperatur	2200 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 214455h (at Tj 65 Ta 25)



L80 B10 C0 136355h (at Tj 65 Ta 25)

L90 B10 C0 67466h (at Tj 65 Ta 25)

OPTICAL

Optik C0/C180	73°
Light distribution simmetry	Asymmetrical

Step | Wall Lights | Accessories
C00943BBAWW



Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=42mm, H=30mm, D=42mm.
Material:PS, farbe:Weiß.

Code
99850