# Rollip60_MC

Lineare Elemente | 128 topLED 27 W DC 48 V
Modular | CRI 90
**C01330WHWZZ**

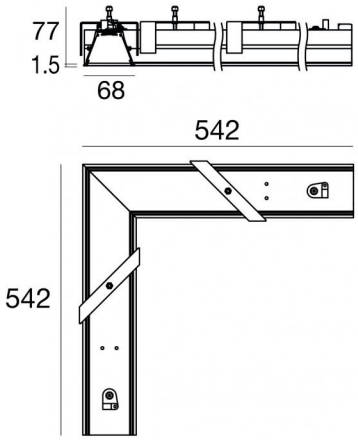


64 x
542 x
542

| Technische Daten | |
|---|---|
| Typ | Lineare Elemente - Frame |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | No optic |
| Light emission direction | downward |
| Lampe Nennleistung | 27 W DC |
| Lichtstrom (Lichtquelle) | 3643 lm |
| Ähnlichste Farbtemperatur / Tone | 3000 K |
| Farbwiedergabeindex | 90 Ra |
| Gleichstrom/Gleichspannung | CV |
| Isolierklasse | 3 |
| IP | IP40 |
| IP optisches System | IP54 |
| Glühdrahtprüfung | Nein |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | DALI - 1-10V |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Nein |
| Harzbeschichtung | Nein |
| Einbautiefe | 77 mm |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.92 Kg |
| Modularity | Modular |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminiumlegierung 6060 |
| Farbe | Text white RAL9003 |
| Bearbeitungstyp | Pulverbeschichtung mit duroplastischen Pulvern |

**Elektronik**

99784
Switching Driver 180~295V AC / V DC (1 - 5 art.)

99785
On/Off Driver 100~305V AC / V DC (1 - 8 art.)

C-E400003
Push and Simply Dim - DALI-2 Controller (1 - 5 art.)

C-E300009
On/Off Driver 220~240V AC / V DC (1 - 2 art.)



C-E300010
On/Off Driver 220~240V AC / V DC (1 - 5 art.)



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 128 topLED 27 W DC 48 V | Modular | CRI 90 | + C-U200008+1
**C01330WHWZZ**

Single emission lines or lines for indoor application. The warm white LED light source with a no optic light distribution is composed of 128 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3643 lm, with a 134.9 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 0.92 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 27 W

The device features protection class III and can be ceiling-mounted, with a 64 x 542 x 542 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

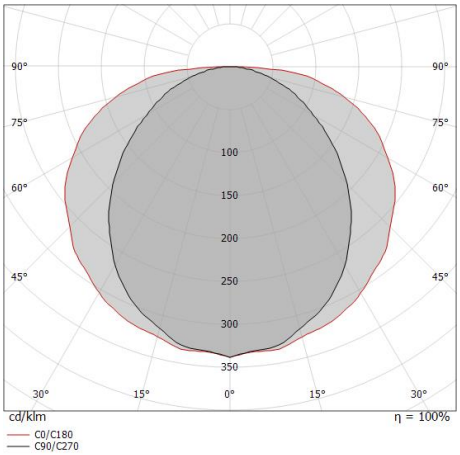


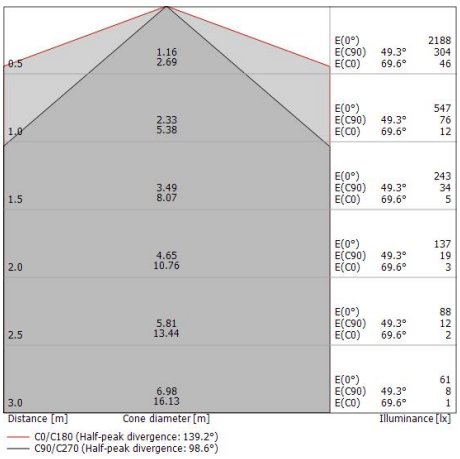


| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 44 % |
| Lichtstrom (Lichtquelle) | 3643 lm |
| Leuchten Lichtstrom | 1616 lm |
| Consumption | 13 W |
| Leuchten Lichtausbeute | 124 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 24.7 |
| UGR transversal | 29.9 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C90/C270 | 99° |
| Optik C0/C180 | 139° |
| Light distribution simmetry | Symmetrical 2 assis |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 128 topLED 27 W DC 48 V | Modular | CRI 90 | + C-U200008+2

**C01330WHWZZ**

Single emission lines or lines for indoor application. The warm white LED light source with a no optic light distribution is composed of 128 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3643 lm, with a 134.9 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 0.92 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 27 W

The device features protection class III and can be ceiling-mounted, with a 64 x 542 x 542 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

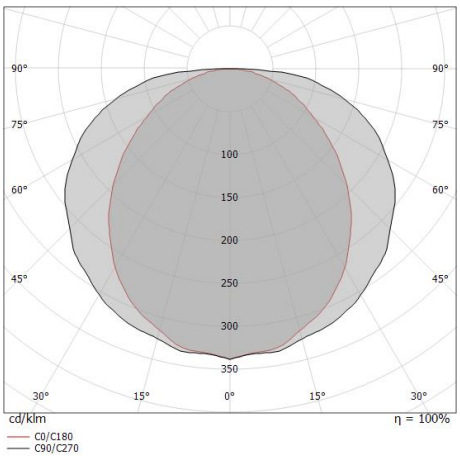


| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 44 % |
| Lichtstrom (Lichtquelle) | 3643 lm |
| Leuchten Lichtstrom | 1616 lm |
| Consumption | 13 W |
| Leuchten Lichtausbeute | 124 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 24.7 |
| UGR transversal | 29.9 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C90/C270 | 139° |
| Optik C0/C180 | 99° |
| Light distribution simmetry | Symmetrical 2 assis |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 128 topLED 27 W DC 48 V | Modular | CRI 90 | + C-U200012+1

**C01330WHWZZ**

Single emission lines or lines for indoor application. The warm white LED light source with a no optic light distribution is composed of 128 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3643 lm, with a 134.9 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 0.92 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 27 W

The device features protection class III and can be ceiling-mounted, with a 64 x 542 x 542 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 45 % |
| Lichtstrom (Lichtquelle) | 3643 lm |
| Leuchten Lichtstrom | 1654 lm |
| Consumption | 13 W |
| Leuchten Lichtausbeute | 127 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 24.7 |
| UGR transversal | 29.9 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 95° |
| Light distribution simmetry | Asymmetrical |

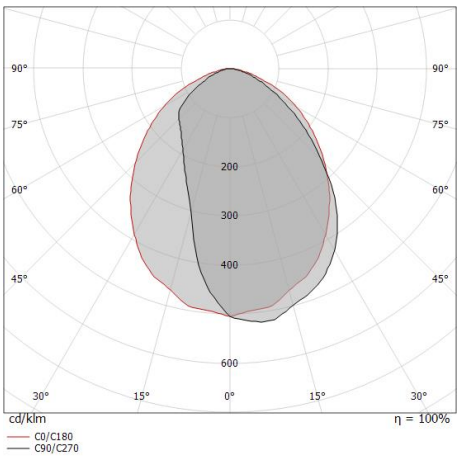


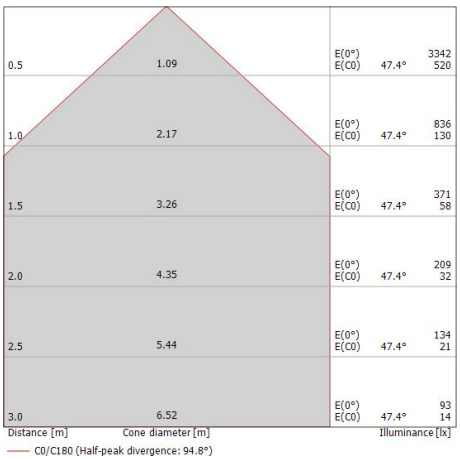




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 128 topLED 27 W DC 48 V | Modular | CRI 90 | + C-U200012+2

**C01330WHWZZ**

Single emission lines or lines for indoor application. The warm white LED light source with a no optic light distribution is composed of 128 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3643 lm, with a 134.9 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 0.92 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 27 W

The device features protection class III and can be ceiling-mounted, with a 64 x 542 x 542 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

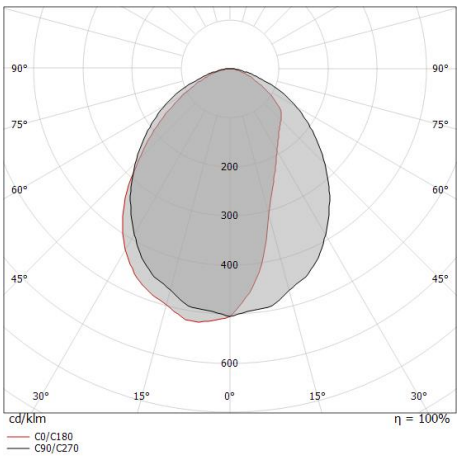


| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 45 % |
| Lichtstrom (Lichtquelle) | 3643 lm |
| Leuchten Lichtstrom | 1654 lm |
| Consumption | 13 W |
| Leuchten Lichtausbeute | 127 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 24.7 |
| UGR transversal | 29.9 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C90/C270 | 95° |
| Light distribution simmetry | Asymmetrical |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 128 topLED 27 W DC 48 V | Modular | CRI 90 | + C-U200014+1

**C01330WHWZZ**

Single emission lines or lines for indoor application. The warm white LED light source with a no optic light distribution is composed of 128 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3643 lm, with a 134.9 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 0.92 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 27 W

The device features protection class III and can be ceiling-mounted, with a 64 x 542 x 542 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 38 % |
| Lichtstrom (Lichtquelle) | 3643 lm |
| Leuchten Lichtstrom | 1403 lm |
| Consumption | 13 W |
| Leuchten Lichtausbeute | 107 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 20.5 |
| UGR transversal | 21.1 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C90/C270 | 65° |
| Optik C0/C180 | 71° |
| Light distribution simmetry | Symmetrical 2 assis |

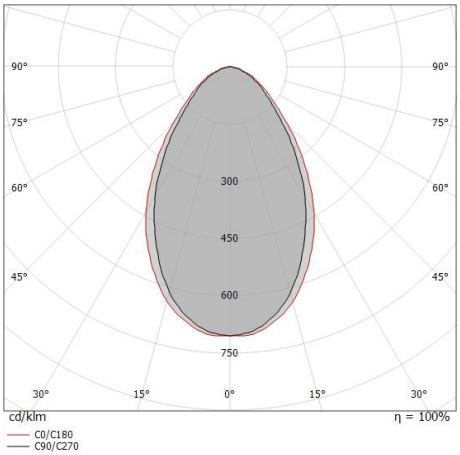


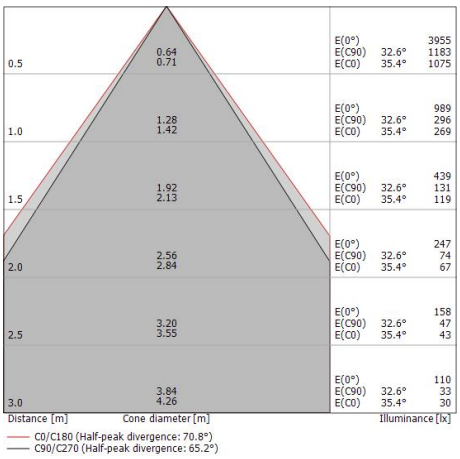




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 128 topLED 27 W DC 48 V | Modular | CRI 90 | + C-U200014+2

**C01330WHWZZ**

Single emission lines or lines for indoor application. The warm white LED light source with a no optic light distribution is composed of 128 topled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3643 lm, with a 134.9 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 0.92 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 27 W

The device features protection class III and can be ceiling-mounted, with a 64 x 542 x 542 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

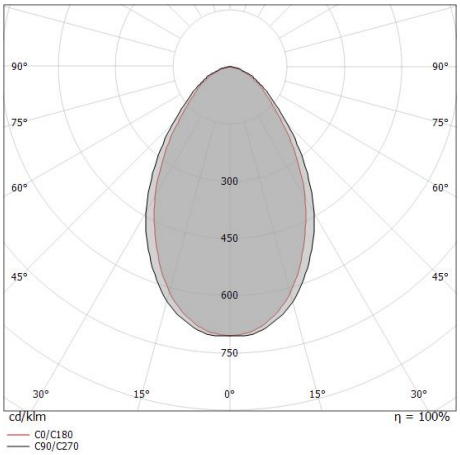


| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 38 % |
| Lichtstrom (Lichtquelle) | 3643 lm |
| Leuchten Lichtstrom | 1403 lm |
| Consumption | 13 W |
| Leuchten Lichtausbeute | 107 lm/W |
| Farbtemperatur | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Standardumgebungstemperatur | -20 / +50°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 494435h (at Tj 65 Ta 25 ) |
| L80 B10 C0 310287h (at Tj 65 Ta 25 ) |
| L90 B10 C0 147586h (at Tj 65 Ta 25 ) |

| UGR | |
|---|---|
| UGR axial | 20.5 |
| UGR transversal | 21.1 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C90/C270 | 71° |
| Optik C0/C180 | 65° |
| Light distribution simmetry | Symmetrical 2 assis |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip60_MC | Lines | Accessories
**C01330WHWZZ**




Diffusor - Asymmetrisch - Länge 1.5m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200038




Diffusor - Asymmetrisch - Länge 2m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200039




Diffusor - Asymmetrisch - Länge 3m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200040




Diffusor - Asymmetrisch - Länge 5m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200012




Diffusor - Asymmetrisch - Länge 10m
Diffusorart: asymmetric diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200013




Diffusor - Opal - Länge 1.5m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200041




Diffusor - Opal - Länge 2m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200042




Diffusor - Opal - Länge 3m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200043



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip60_MC | Lines | Accessories
**C01330WHWZZ**




Diffusor - Opal – Länge 5 m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200008




Diffusor - Opal – Länge 10m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200009




Diffusor - Opal – Länge 20m
Diffusorart: opal diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal.

**Code**
C-U200010




Diffusor - Blendfreier Diffusor – Länge 1.5m
Diffusorart: anti-glare diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

**Code**
C-U200044




Diffusor - Blendfreier Diffusor – Länge 2m
Diffusorart: anti-glare diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

**Code**
C-U200045




Diffusor - Blendfreier Diffusor – Länge 3m
Diffusorart: anti-glare diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

**Code**
C-U200046




Diffusor - Blendfreier Diffusor – Länge 5m
Diffusorart: anti-glare diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

**Code**
C-U200014




Diffusor - Blendfreier Diffusor – Länge 10m
Diffusorart: anti-glare diffuser.
Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.

**Code**
C-U200015



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rollip60_MC | Lines | Accessories
**C01330WHWZZ**




Endkappe - Um die Endkappen verwenden zu können, ist es notwendig, die Länge des Installationslochs um 8 mm zu vergrößern.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

**Code**
C-V400008







Lochschablone
Material:MDF, farbe:Holz.

**Code**
C-V200003



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.