Regolo V2 mono-emission

Wandleuchten | 198-264 V | 1 topLED 26 W DC - 30 W AC | CRI 90
CA038DMGMDI





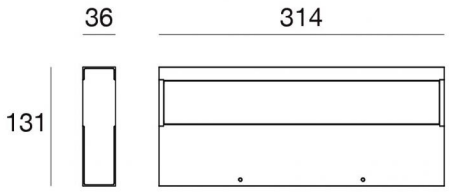

Technische Daten	
Typ	Wandleuchten
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	upward
Lampe Nennleistung	26 W DC
Gesamtleistung	30 W
Lichtstrom (Lichtquelle)	3920 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Nein
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Phase cut
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.080 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	1 KV

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text grey (R7012)
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PC
Farbe	Opal

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Zink
Bearbeitungstyp	Waschen

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Regolo V2 mono-emission

Wandleuchten | 198-264 V | 1 topLED 26 W DC - 30 W AC | CRI 90
CA038DMGMDI

Single emission wall lights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3920 lm, with a 150.8 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text grey (r7012) finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a zinc finish, processed by means of washing.

The ingress protection degree is IP40; the total weight is of 1.080 kg.

The total absorbed power is 30 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	66 %
Lichtstrom (Lichtquelle)	3920 lm
Leuchten Lichtstrom	2588 lm
Consumption	30 W
Leuchten Lichtausbeute	86 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	20°C

LED Life / Failure Ratio
L70 B10 C0 102000h
L90 B10 C0 55000h

UGR	
UGR axial	30.8
UGR transversal	30.9
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	113°
Light distribution simmetry	Symmetrical

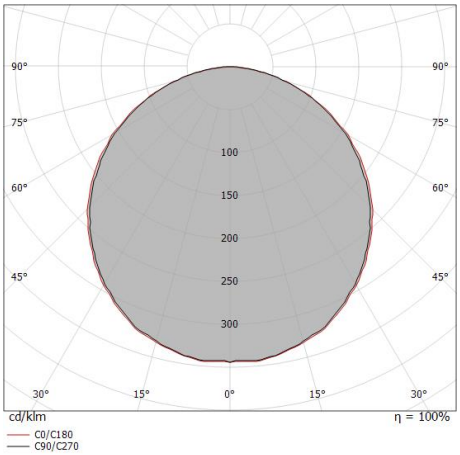

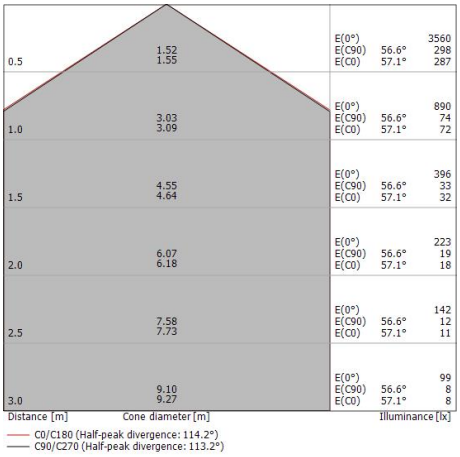

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Regolo V2 mono-emission | Wall Lights | Accessories
CA038DMGMDI





Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code
KIT0026





Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi
Radio-frequenza, 85-240V

Code
KIT0080

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.