

Wandleuchten | 198-264 V | 2 topLED 17 W DC - 19 W AC | CRI 90
CA040DBBMDI

Double emission wall lights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 2 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2531 lm, with a 148.9 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text black ral9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a zinc finish, processed by means of washing.

The ingress protection degree is IP40; the total weight is of 0.650 kg.

The total absorbed power is 19 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	76 %
Lichtstrom (Lichtquelle)	2531 lm
Leuchten Lichtstrom	1933 lm
Consumption	19 W
Leuchten Lichtausbeute	101 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	20°C

LED Life / Failure Ratio

L70 B10 C0 102000h


L90 B10 C0 55000h

UGR

UGR axial	26.3
UGR transversal	26.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL


Optik C0/C180	113°
Light distribution simmetry	Symmetrical

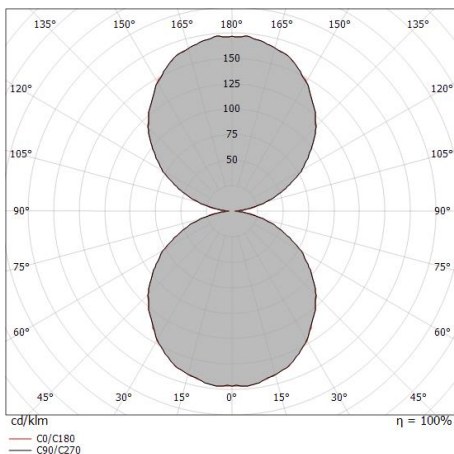

0.5	1.52	E(0°)		1327
	1.51	E(C90)	56.6°	111
		E(C0)	56.5°	112
1.0	3.03	E(0°)		332
	3.02	E(C90)	56.6°	28
		E(C0)	56.5°	28
1.5	4.55	E(0°)		147
	4.53	E(C90)	56.6°	12
		E(C0)	56.5°	12
2.0	6.07	E(0°)		83
	6.04	E(C90)	56.6°	7
		E(C0)	56.5°	7
2.5	7.58	E(0°)		53
	7.55	E(C90)	56.6°	4
		E(C0)	56.5°	4
3.0	9.10	E(0°)		37
	9.07	E(C90)	56.6°	3
		E(C0)	56.5°	3
Distance [m]	Cone diameter [m]	Illuminance [lx]		
— C0/C180 (Half-peak divergence: 113.0°) — C90/C270 (Half-peak divergence: 113.2°)				

Regolo V2 double-emission | Wall Lights | Accessories


CA040DBBMDI



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code

KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi
Radio-frequenza, 85-240V

Code

KIT0080