

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung
Oberfläche Oberfläche diffusor	
Material	PC
Farbe	Opal
Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Zink
Bearbeitungstyp	Waschen

Wandleuchten | 198-264 V | 2 topLED 17 W DC - 19 W AC | CRI 90
CA040DWHWDI

Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 2 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2721 lm, with a 160.1 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white ral9003 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a zinc finish, processed by means of washing.

The ingress protection degree is IP40; the total weight is of 0.650 kg.

The total absorbed power is 19 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	76 %
Lichtstrom (Lichtquelle)	2721 lm
Leuchten Lichtstrom	2079 lm
Consumption	19 W
Leuchten Lichtausbeute	109 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	20°C

LED Life / Failure Ratio

L70 B10 C0 102000h



L90 B10 C0 55000h

UGR


UGR axial	26.5
UGR transversal	26.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	113°
Light distribution simmetry	Symmetrical

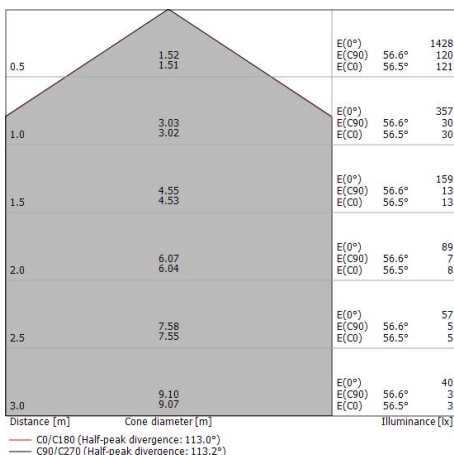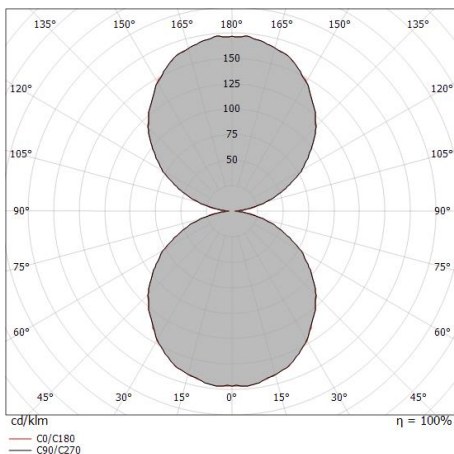


Regolo V2 double-emission | Wall Lights | Accessories
CA040DWHWDI



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code
KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi
Radio-frequenza, 85-240V

Code
KIT0080