
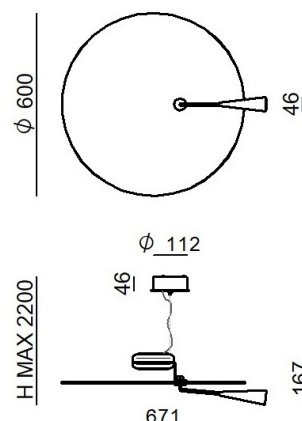
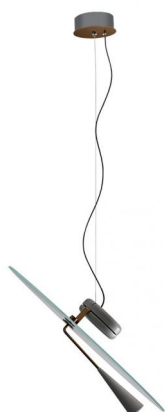


| CRI 90
CZ001CGGMDD



Technische Daten	
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	25 W DC
Gesamtleistung	26 W
Lichtstrom (Lichtquelle)	3547 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Orientabile
Gesamtwinkel (horizontale Ebene)	360 °
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	5.900 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse

Material	Aluminium - Eisen
Farbe	Text grey (R7012)
Bearbeitungstyp	Lackierung - Lackierung

Oberfläche Oberfläche diffusor

Material	Glas
Farbe	Transparent
Bearbeitungstyp	Siebdruck

Oberfläche Oberfläche fassung

Material	Eisen
Farbe	Text grey (R7012)
Bearbeitungstyp	Lackierung

Cables Pendelleuchte

Max. Kabellänge	2000 mm
-----------------	---------

| CRI 90
CZ001CGGMDD

Double emission pendant luminaires for indoor application. The super warm white LED light source with a diffused light distribution is composed of 120 toped LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3547 lm, with a 141.9 lm/W nominal luminous efficacy.



The device body is made of aluminium and features a text grey (r7012) finish, processed by means of coating The device body is made of iron, processed by means of coating; the diffuser is made of glass with a silk-screening treatment; the mounting frame is made of iron, with a text grey (r7012) finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 5.900 kg.

The total absorbed power is 26 W The power supply cable is included and features a 2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

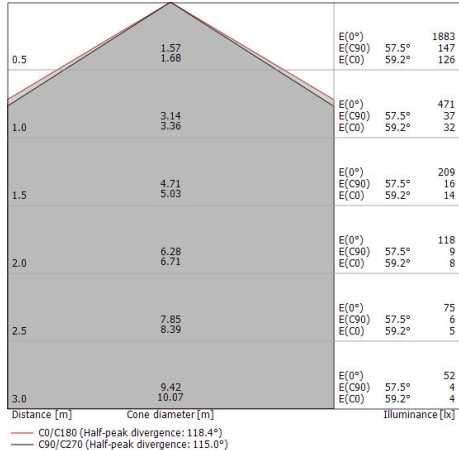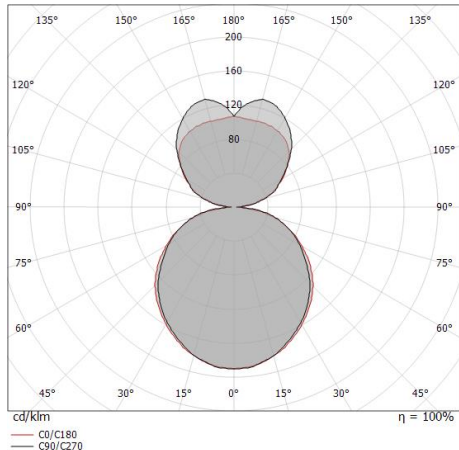

Energieeffizienzklasse	
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	69 %
Lichtstrom (Lichtquelle)	3547 lm
Leuchten Lichtstrom	2477 lm
Consumption	26 W
Leuchten Lichtausbeute	95 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C
LED Life / Failure Ratio	
L70 B10 C0 102000h (at Tj 115 Ta 25)	
L90 B10 C0 55000h	
UGR	
UGR axial	16.8
UGR transversal	16.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	115°
Light distribution simmetry	Symmetrical