# Bascula

Pendelleuchte | 220-240 V
120 topLED 25 W DC - 26 W AC | CRI 90
**CZ001CRHMDD**

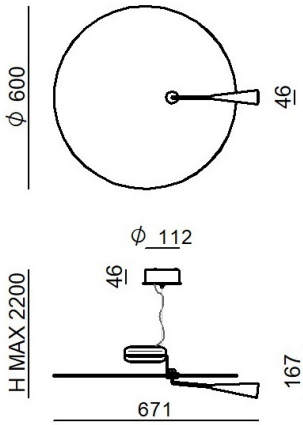


| Technische Daten | |
|---|---|
| Designer | Shigeaki Asahara |
| Jahr der Verwirklichung | 1985 |
| Typ | Pendelleuchte |
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Diffuses |
| Light emission direction | downward and upward |
| Lampe Nennleistung | 25 W DC |
| Gesamtleistung | 26 W |
| Lichtstrom (Lichtquelle) | 3513 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 220 - 240 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 90 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP20 |
| Glühdrahtprüfung | 650° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | DALI-2 - PUSH DIM |
| Schwenkbarkeit | Orientabile |
| Gesamtwinkel (horizontale Ebene) | 360 ° |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 2 m |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Zweiflammig |
| Nettogewicht | 5.55 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminium - Eisen |
| Farbe | Text red iconic (R3020) - Brushed black nickel |
| Bearbeitungstyp | Lackierung - Tampongalvanisieren |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | Glas |
| Farbe | Transparent |
| Bearbeitungstyp | Siebdruck |

| Oberfläche Oberfläche fassung | |
|---|---|
| Material | Eisen |
| Farbe | Text red iconic (R3020) |
| Bearbeitungstyp | Lackierung |

| Cables Pendelleuchte | |
|---|---|
| Max. Kabellänge | 2000 mm |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | 120 topLED 25 W DC - 26 W AC | CRI 90
**CZ001CRHMDD**

Double emission pendant luminaires for indoor application. The super warm white LED light source with a diffused light distribution is composed of 120 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3513 lm, with a 140.5 lm/W nominal luminous efficacy.

The device body is made of iron and features a brushed black nickel finish, processed by means of electroplating The device body is made of aluminium and features a text red iconic (r3020) finish, processed by means of coating; the diffuser is made of glass with a silk-screening treatment; the mounting frame is made of iron, with a text red iconic (r3020) finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 5.55 kg.

The total absorbed power is 26 W The power supply cable is included and features a 2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

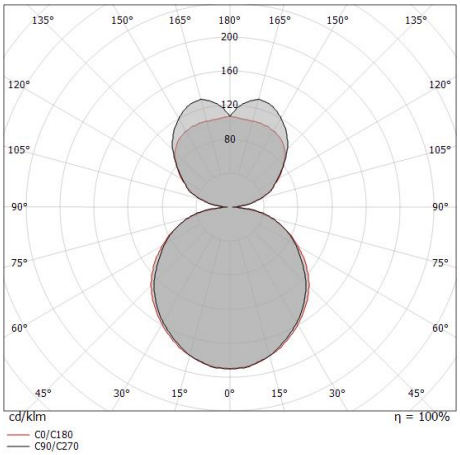


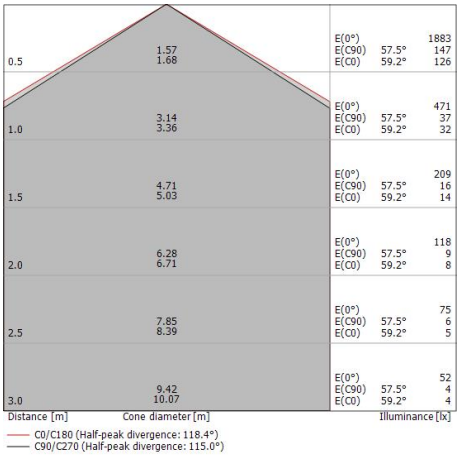


| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E. |

| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 70 % |
| Lichtstrom (Lichtquelle) | 3513 lm |
| Leuchten Lichtstrom | 2477 lm |
| Consumption | 26 W |
| Leuchten Lichtausbeute | 95 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 90 Ra |
| Verbindungstemperatur (Leuchte) | 80 |
| Standardumgebungstemperatur | 25°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 102000h (at Tj 115  Ta 25 ) |
| L90 B10 C0 55000h |

| UGR | |
|---|---|
| UGR transversal | 16.6 |
| UGR axial | 16.8 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|---|---|
| Optik C0/C180 | 115° |
| Light distribution simmetry | Symmetrical |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Bascula | Pendant Luminaires | Accessories

**CZ001CRHMDD**







Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle

Bluetooth, 220-240V

**Code**

KIT0079



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.