Cono

Pendelleuchte | 220-240 V | 5x14W E27

CZ149DVBMDI

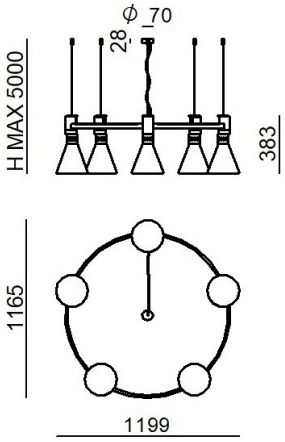

Technische Daten	
Designer	Stilnovo
Jahr der Verwirklichung	2026
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Ja
Anschluss der Leuchte	5 x E27
Light emission direction	downward and upward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Phase cut
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	6 m
Harzbeschichtung	Nein

Oberfläche Oberfläche Gehäuse	
Material	Eisen
Farbe	Satin black nickel
Bearbeitungstyp	Tampongalvanisieren

Oberfläche Oberfläche diffusor	
Material	Glas
Farbe	Weiß

Cables Pendelleuchte	
Max. Kabellänge	6000 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | 5x14W E27
CZ149DVBMDI

Double emission pendant luminaires for indoor application. LED lamplamp included, lamp cap E27 5x14W.

The device body is made of iron and features a satin black nickel finish, processed by means of electroplating; the diffuser is made of glass.

The ingress protection degree is IP20;

The power supply cable is included and features a 6 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 5 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	100 %
Leuchten Lichtstrom	5818 lm
Consumption	70 W
Leuchten Lichtausbeute	83 lm/W
Farbtemperatur	2700 K
Farbwiedergabeindex	80 Ra
Lichtstrom (Lichtquelle)	5 x 1900 lm
Standardumgebungstemperatur	25°C

UGR	
UGR axial	13.7
UGR transversal	14
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Symmetrical

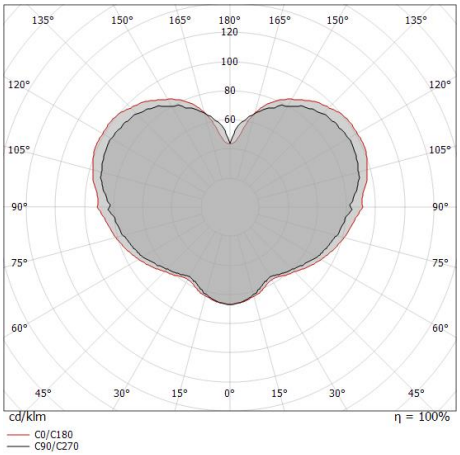

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Cono | Pendant Luminaires | Accessories

CZ149DVBMDI



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi Radio-frequenza, 85-240V

Code

KIT0080



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe 220-240V

Code

KIT0026

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.