Systeme
TR4105-5

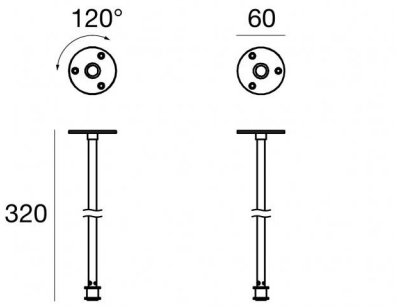

Technische Daten	
Typ	300 System
Installationsposition	Decke
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Nein
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Nettogewicht	0.79 Kg

Oberfläche Oberfläche Gehäuse	
Material	Messing gebürstet - Eisen
Farbe	Metall grau - Metall grau
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Systeme
TR4105-5

Components



Eta-C30

Code
9920 - 9918 - 9921 - 9919 - 9917 - 9916 - 9916M - 9919M - 9917M - 9920M - 9918M - 9921M - 9916N - 9919N - 9917N - 9920N - 9918N - 9921N



Iota-C30_2

Code
9864 - 9863 - 9863M - 9864M - 9863N - 9864N



Iota-C30_1

Code
9862 - 9861 - 9861M - 9862M - 9861N - 9862N



Matrix-C30

Code
54284 - 54285



Vega-C30_1

Code
TR4000-5 - TR4000-4



Vega-C30_2

Code
TR4014-4 - TR4014-5



Trix-C30_2

Code
8427 - 8428 - 8433



Beebo_W-C30

Code
8442 - 8443 - 8444

Systeme
TR4105-5

Components



Polo-C_960

Code
9167



Polo-C_660

Code
9166



Iota-C30_3

Code
9865 - 9866 - 9865M - 9866M - 9865N - 9866N



Orion-C30_J

Code
51545



Trix-C30_1

Code
8425 - 8432 - 8426

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.