Driver 32

Dali,CII, White, 100 000H,W/O Box,W/2M HFFR cable, Linkable

ID: 0027100054

GTIN: 7630268417574

5 YEARS * WARRANTY

LED Output 34W Max | 100000H | DALI-2 | IP20
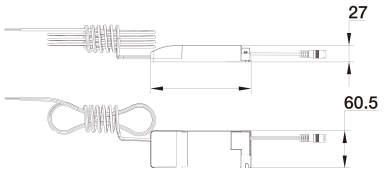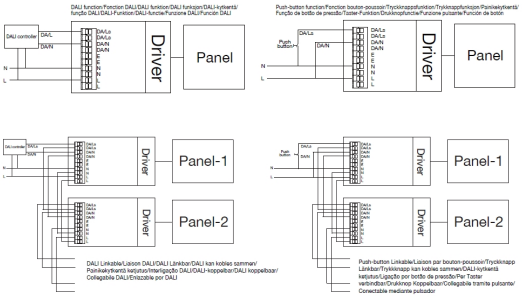
Technical Data	
Model:	Static
Dimmable:	yes
Dimming 0-10 V:	no
Dimming 1-10 V:	no
Dimming DALI:	yes
Dimming phase cut-off (trailing edge):	no
Dimming phase cut-on (leading edge):	no
Dimming with push-button:	yes
Constant light output (CLO):	no
Housing:	Plastic housing
Suitable for constant current:	yes
Suitable for constant voltage:	no
Output voltage:	30...40 V
Output current:	850...850 mA
Suitable for DC-voltage (primary side):	no
Output power:	25.5...34 W
Power consumption:	0.5 W
Efficiency:	86 %
Mains surge immunity (common mode, L/N-Ground):	2 kV
Mains surge immunity (differential mode, L-N):	1 kV
Overload protection:	yes
Max. number of luminaires per miniature circuit breaker B16 (MCB):	18
Max. number of luminaires per miniature circuit breaker C16 (MCB):	29
Degree of protection (IP):	IP20
Protection class according to IEC 61140:	II
Driver lifetime:	100000 h
Length:	163.1 mm
Width:	60.5 mm
Height:	27 mm
Suitable for outdoor use:	no
Input voltage:	220...240 V
Frequency input voltage:	50...60 Hz
Independently operating:	no
PWM modulation:	yes