

Backlit Panel

6060,33W,40K, 3960lm,UGR19,W/Driver,Dali,W/O Box,W/Quick connect,W/safety wire

ID: 0028920182


GTIN: 7630268416942

5 YEARS *
WARRANTY



Technical Data

Rated luminous flux according to IEC 62722-2-1:	3960...0 lm
Luminaire efficacy:	120...0 lm/W
Colour temperature:	4000...4000 K
Colour rendering index CRI:	80-89
Colour consistency (McAdam ellipse):	SDCM5
Unified Glare Ratio (UGR):	19
Beam angle:	> 80° - Extreme wide beam
Light distributor:	Diffuser lens/optic/panel
Energy efficiency class of the light source according to EU regulation 2019/2015:	E
Protection class according to IEC 61140:	II
Nominal voltage:	220...240 V
Nominal current:	700...850 mA
Max. system power:	36.3 W
Power factor:	0.9
Max. number of luminaires per miniature circuit breaker B16 (MCB):	25
Max. number of luminaires per miniature circuit breaker C16 (MCB):	35
Connection type:	Push-in clamp
Rated lifetime L70/B50 at 25 °C:	100000 h
Impact strength:	IK02
Rated ambient temperature according to IEC 62722-2-1:	-20...40 °C
Filament test according to IEC 60695-2-11:	650 °C - 30 s
Photobiological safety according to EN 62471:	RG0
Covering of the luminaire with thermally insulating material possible:	no
Housing material:	Aluminium
Length:	595 mm
Width:	595 mm
Height/depth:	32 mm
Suitable for emergency lighting:	no
With movement sensor:	no
With light sensor:	no
With control gear:	yes
Type of control gear:	LED operating device current-controlled
Light distribution:	Symmetric
Type of wiring:	Ending

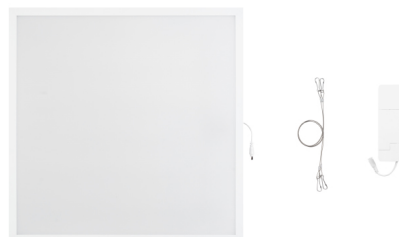

Dali Driver

Safety Cable included

