


PROIETTORE FLOOD LED 10W 1000lm

**Flood Light, IK06 IP65, 10W, 1000lm, 4000K, CRI>80, 110°
Non-dimmable**

Model No.: ARIF100N
SGSO Sku: 0017440030
GTIN/EAN: 7630268405861

Suitable for surface mounting:	Yes
Suitable for wall mounting:	Yes
Suitable for pedestal/floor mounting:	Yes
Adjustability:	Rotatable
Lamp type:	LED not exchangeable
With light source:	Yes
Suitable for number of lamps:	1
Lamp holder:	None
Material housing:	Aluminium
Colour housing:	Black
Material cover:	Glass structured
Voltage type:	AC
Nominal voltage:	220 ... 240 V
LED nominal current at constant current:	44 mA
Type of control gear:	LED operating device current-controlled
No dim function:	Yes
Beam angle:	Extreme wide beam >80°
Light outlet:	Direct
Rated life time L70/B50 at 25 °C:	50000 h
Rated life time L80/B10 at 25 °C:	30000 h
Degree of protection (IP):	IP65
Impact strength:	IK06
Protection class:	I
Rated ambient temperature according to IEC62722-2-1:	25 °C
Suitable for lamp power:	10 W
Max. system power:	10 W
Colour of light:	White
Colour temperature:	4000 K
Colour rendering index CRI:	80-89
Luminous flux:	1000 lm
Rated luminous flux according to IEC 62722-2-1:	1000 lm
Power factor:	0.9
Width:	115 mm
Height/depth:	28 mm
Length:	117 mm
Filament test according to IEC 60695-2-11:	650 °C - 30 s
Luminaire efficacy:	100 lm/W
Colour consistency (McAdam ellipse):	SDCM6

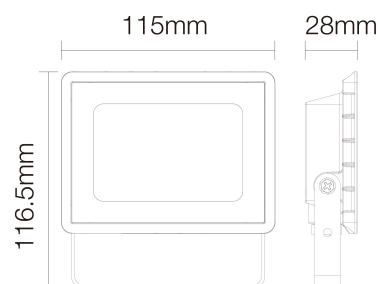

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

