


Trend Top 110

LL1080533

Lombardo.

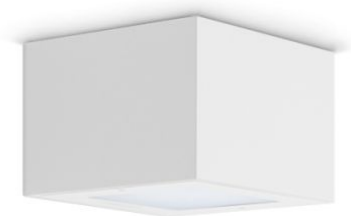

Informazioni tecniche:

Installazione:	Soffitto, Superficie soffitto
Materiale Corpo:	Alluminio
Finitura:	Bianco RAL 9010
Tipo di diffusore:	Polycarbonato
Tipo lampada:	LED
Temperatura colore:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Rischio fotobiologico:	RG1
Potenza assorbita Watt:	7
Lumen:	752
Real Lumen:	308 - 526
Alimentazione:	☑ integrata
LED:	220-240 V
Interruttore magnetotermico	36-44-52-65
B10 - C10 - B16 - C16	
Classe di isolamento:	⊕ CL.I
Grado di protezione:	IP 66
Resistenza alla rottura:	IK 10 20J xx9
Marchi di Conformità:	CE UK

BORDO MARE: aggiungi S alla fine del codice selezionato comprensivo di colore LED per avere il prodotto fornito con trattamento bordo mare contro le nebbie saline.



Trend Top 110

LL1080533

Lombardo.




Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

The diagram illustrates a lighting fixture (represented by a black dot) positioned at a height of 2,8m above a grid. The grid is composed of squares, each measuring 0,5m by 0,5m. A red oval highlights the area of maximum illuminance (150,00 LUX) directly beneath the fixture. The color scale indicates that the illuminance decreases as the distance from the fixture increases, with values of 50,00 LUX, 10,00 LUX, and 0,00 LUX represented by lighter shades of red.

trend_110_7w_top_poliglass

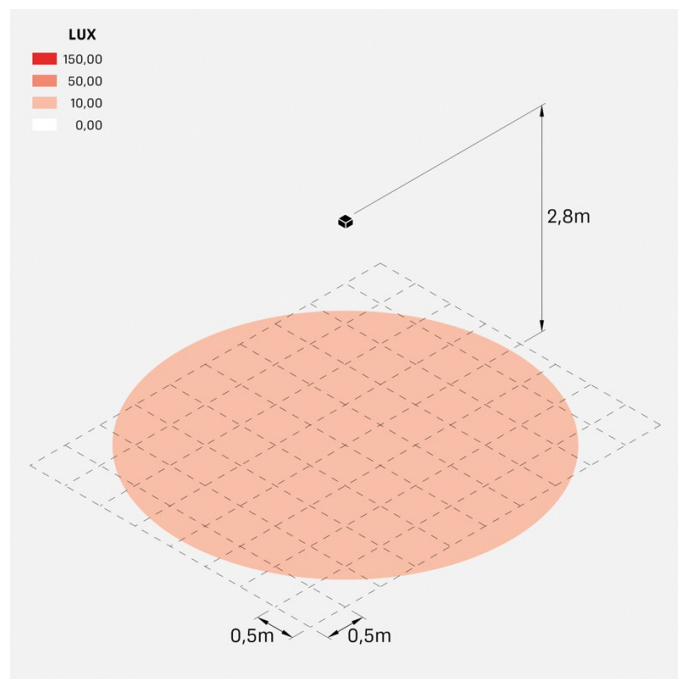

trend_110_7w_top_trasp

