



Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	10
Protection fuse	gG (IEC)	A 16
Tightening torque for terminals	min	Nm 0.8
	max	Nm 1
	min	lbin 9
	max	lbin 9
Tightening torque for coil terminal	min	Nm 0.8
	max	Nm 1
	min	lbin 9
	max	lbin 9
Max number of wires simultaneously connectable	Nr.	2
Conductor section	AWG/Kcmil	
	max	12
Flexible w/o lug conductor section	min	mm ² 0.75
	max	mm ² 2.5
Flexible c/w lug conductor section	min	mm ² 1.5
	max	mm ² 2.5
Flexible with insulated spade lug conductor section	min	mm ² 1.5
	max	mm ² 2.5
Power terminal protection according to IEC/EN 60529		IP20 when properly wired

Mechanical features

Operating position	normal	Vertical plan
	allowable	$\pm 30^\circ$
Fixing		Screw / DIN rail 35mm
Weight	g	178

Auxiliary contact characteristics

Thermal current I_{th}	A	10
IEC/EN 60947-5-1 designation		A600 - Q600

Operating current AC15	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	2.9
Operating current DC13	24V	A	2.9
	48V	A	1.4
	60V	A	1.2
	110V	A	0.6
	125V	A	0.55
	220V	A	0.3
	600V	A	0.1

Operations

Mechanical life	cycles	20000000
-----------------	--------	----------

Safety related data

Performance level B10d according to EN/ISO 13489-1	mechanical load	cycles	20000000
--	-----------------	--------	----------

EMC compatibility	yes
-------------------	-----

AC coil operating

Rated AC voltage at 60Hz	V	460
--------------------------	---	-----

AC operating voltage	of 60Hz coil powered at 60Hz	pick-up	min	%Us	75
			max	%Us	115
	drop-out	min	%Us	20	
		max	%Us	55	

AC average coil consumption at 20°C	of 50/60Hz coil powered at 50Hz	in-rush	VA	30	
			holding	VA	4
		of 50/60Hz coil powered at 60Hz	in-rush	VA	25
			holding	VA	3
	of 60Hz coil powered at 60Hz	in-rush	VA	30	
		holding	VA	4	

Dissipation at holding ≤20°C 50Hz	W	0.95
-----------------------------------	---	------

Max cycles frequency

Mechanical operation	cycles/h	3600
----------------------	----------	------

Operating times

Average time for Us control in AC	Closing NO	min	ms	12	
		max	ms	21	
		Opening NO	min	ms	9
			max	ms	18
	Closing NC	min	ms	17	

		max	ms	26
Opening NC		min	ms	7
		max	ms	17
	<hr/>			
in DC				
Closing NO	min	ms	18	
	max	ms	25	
Opening NO	min	ms	2	
	max	ms	3	
Closing NC	min	ms	3	
	max	ms	5	
Opening NC	min	ms	11	
	max	ms	17	

UL technical data

Rated operational voltage AC (UL)	V	600
General USE		

Contactor

AC current	A	10
------------	---	----

Contact rating of auxiliary contacts according to UL	A600 - Q600
--	-------------

Ambient conditions

Temperature

Operating temperature

min	°C	-50
max	°C	+70

Storage temperature


min	°C	-60
max	°C	+80

Max altitude	m	3000
--------------	---	------


Resistance & Protection

Pollution degree	3
------------------	---

Dimensions

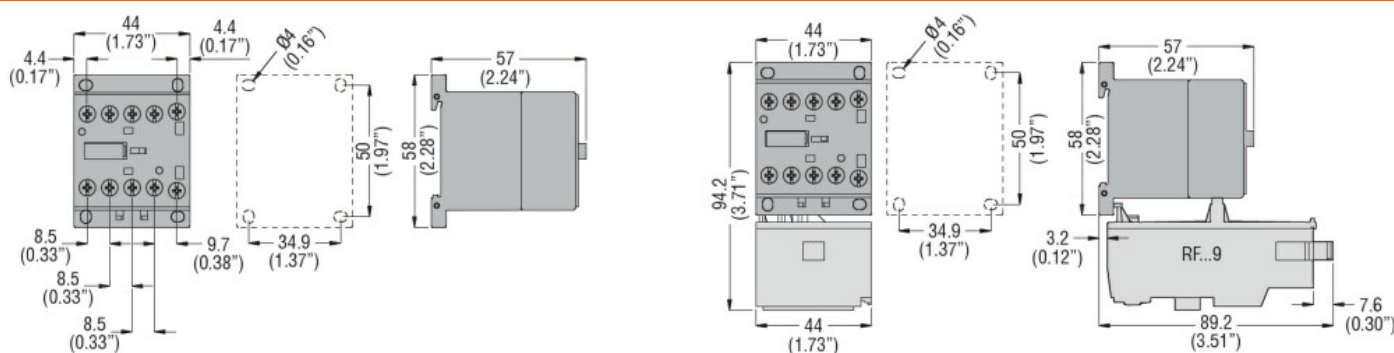

Wiring diagrams

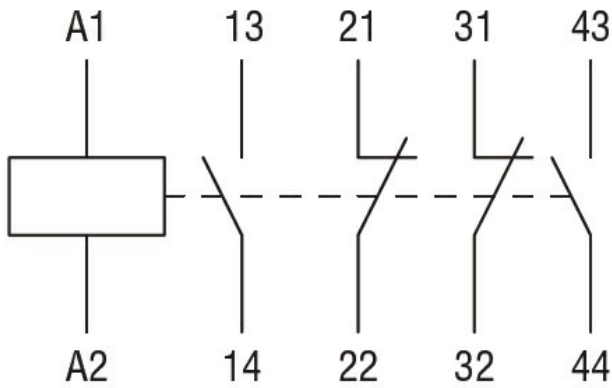

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60335-2-89

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000196 -
Contactor relay