



Electrical features

Maximum operating current ($\leq 440V$)	A	20
---	---	----

Contact characteristics

Operational current I_e			
AC-1 ($\leq 40^\circ C$)	A	20	
AC-1 ($\leq 55^\circ C$)	A	18	
AC-1 ($\leq 60^\circ C$)	A	15	

Rated operational power AC-1 ($T \leq 40^\circ C$)			
230V	kW	8	
400V	kW	14	
500V	kW	16	
690V	kW	22	


UL technical data

UL/CSA General Use	A	20
--------------------	---	----


Mechanical features

Terminals type		Clamp screw
Weight	g	365

Dimensions

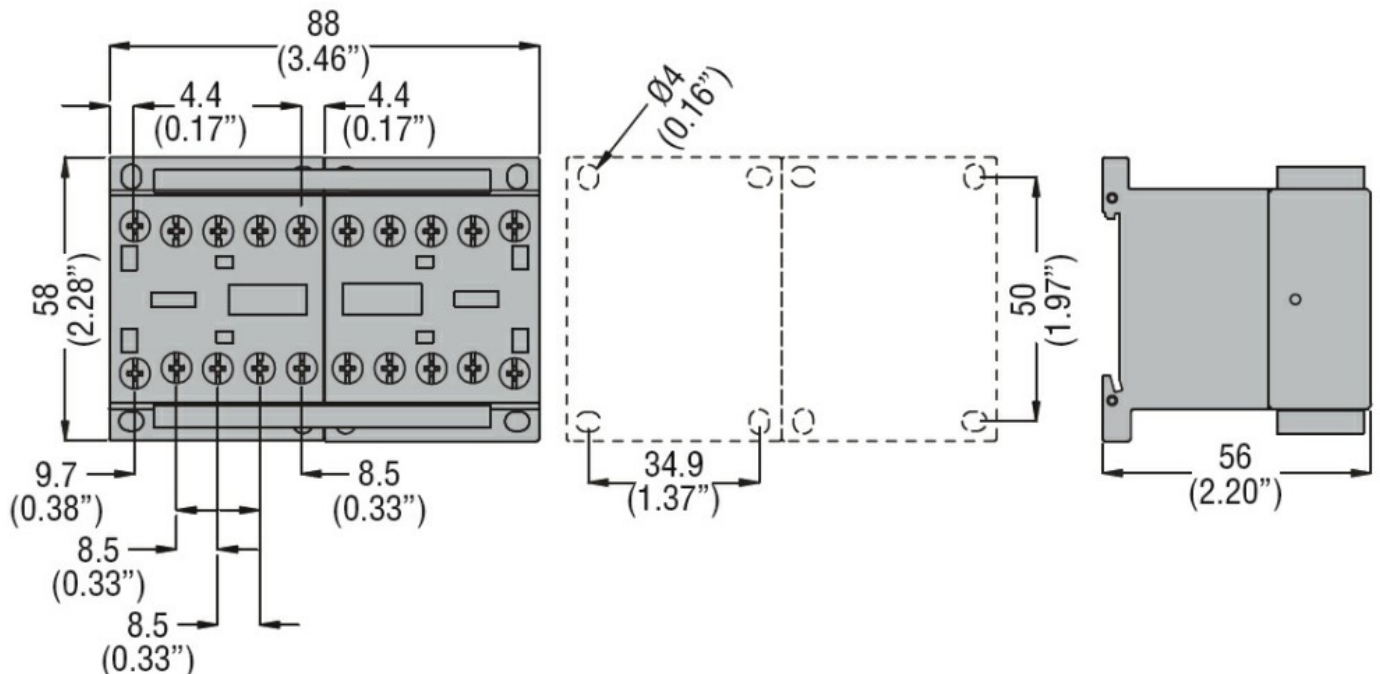

Wiring diagrams

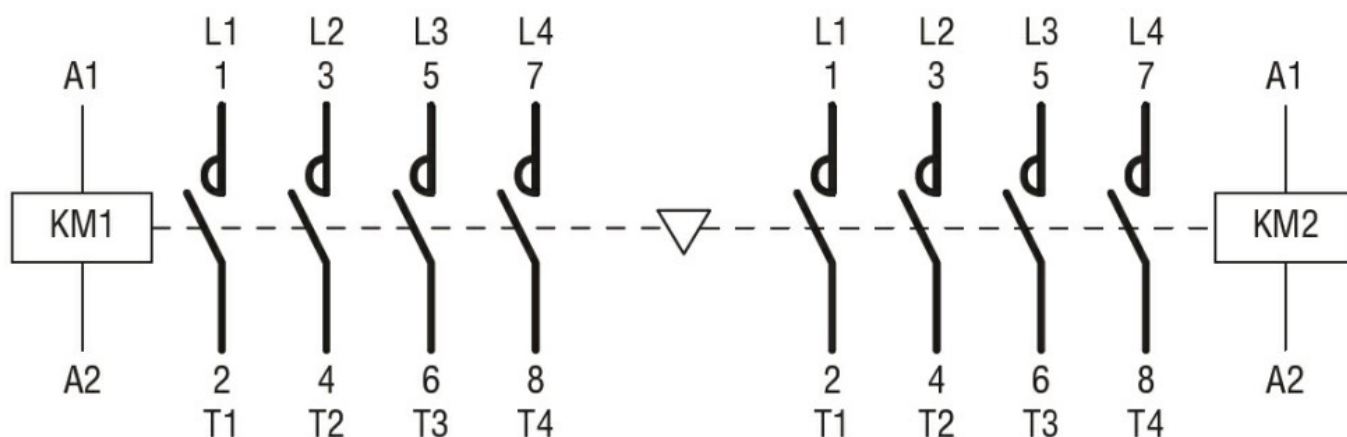

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC000010 -
Combination of
contactors