



#### Caratteristiche elettriche

Corrente d'impiego max ( $\leq 440V$ ) A 9

#### Caratteristiche dei contatti

Corrente di impiego Ie AC-3 ( $\leq 440V \leq 55^{\circ}C$ ) A 9

| Potenza nominale AC-3 ( $T \leq 55^{\circ}C$ ) | Voltage | Power (kW) | Current (A) |
|------------------------------------------------|---------|------------|-------------|
|                                                | 230V    | 2.2        | 9           |
|                                                | 400V    | 4          | 9           |
|                                                | 415V    | 4.3        | 9           |
|                                                | 440V    | 4.5        | 9           |
|                                                | 500V    | 5          | 9           |
|                                                | 690V    | 5          | 9           |

Contatti ausiliari incorporati

|    |   |
|----|---|
| NA | 0 |
| NC | 1 |

#### Dati tecnici UL


| Maximum UL/CSA horsepower ratings single-phase | Voltage   | HP  | Current (A) |
|------------------------------------------------|-----------|-----|-------------|
|                                                | 110V-120V | 0.5 | 9           |
|                                                | 220V-240V | 1.5 | 9           |

| Maximum UL/CSA horsepower ratings three-phase, 3-pole | Voltage   | HP | Current (A) |
|-------------------------------------------------------|-----------|----|-------------|
|                                                       | 200V-208V | 2  | 9           |
|                                                       | 220V-240V | 3  | 9           |
|                                                       | 440V-480V | 5  | 9           |
|                                                       | 550V-600V | 5  | 9           |


#### Caratteristiche meccaniche

|               |                   |
|---------------|-------------------|
| Attacchi tipo | Vite di fissaggio |
| Peso prodotto | g 394             |

#### Dimensioni

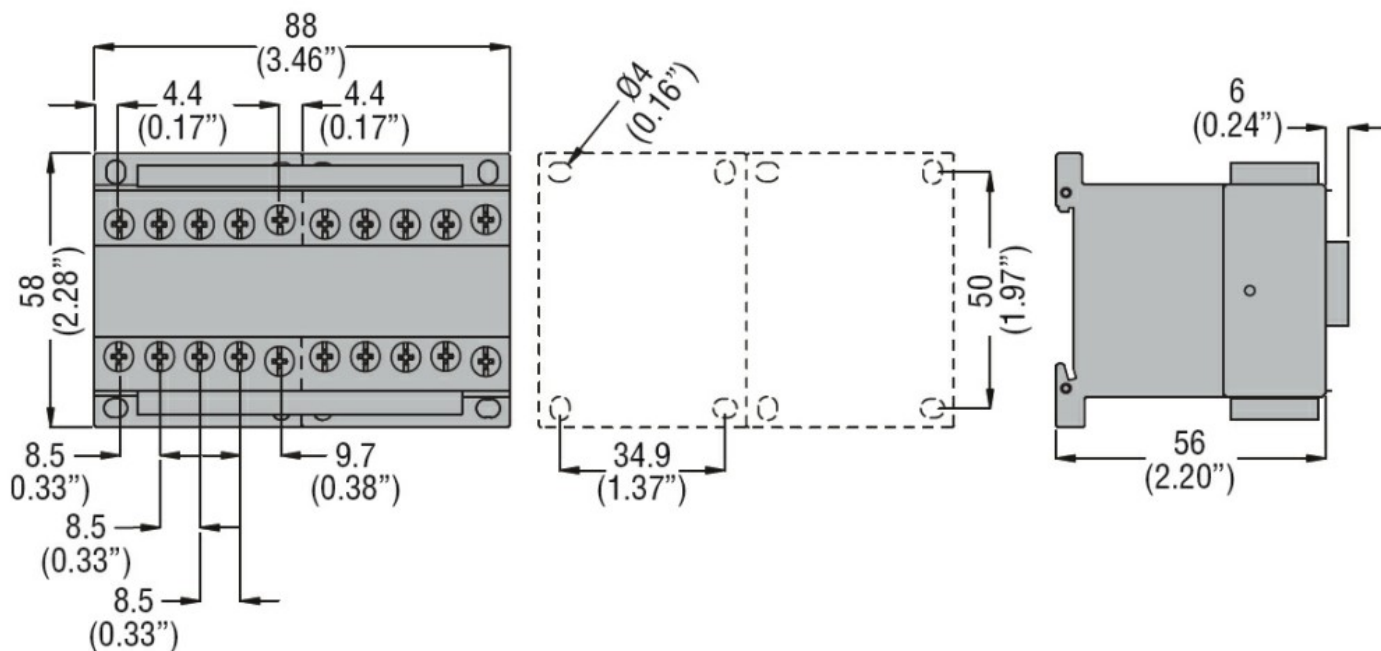

## Schemi elettrici

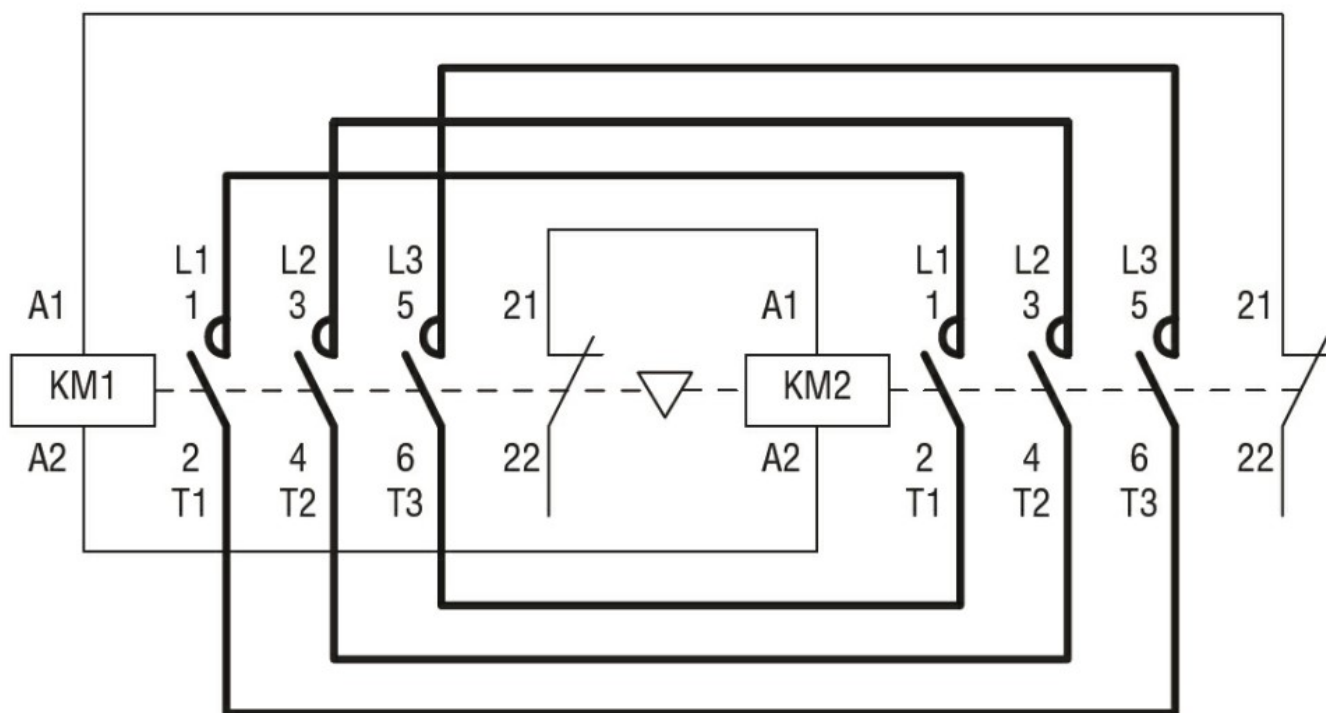

## Omologazioni e conformità

### Conformità

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

### Omologazioni

cULus

## Classificazione ETIM

ETIM 8.0

EC001037 -  
Combinazione  
starter motore