



#### Caratteristiche elettriche

Corrente d'impiego max ( $\leq 440V$ ) A 12

#### Caratteristiche dei contatti

Corrente di impiego Ie AC-3 ( $\leq 440V \leq 55^\circ C$ ) A 12

| Potenza nominale AC-3 ( $T \leq 55^\circ C$ ) | V  | kW  |  |
|-----------------------------------------------|----|-----|--|
| 230V                                          | kW | 3.2 |  |
| 400V                                          | kW | 5.7 |  |
| 415V                                          | kW | 6.2 |  |
| 440V                                          | kW | 5.5 |  |
| 500V                                          | kW | 5   |  |
| 690V                                          | kW | 5   |  |

Contatti ausiliari incorporati

|    |   |
|----|---|
| NA | 1 |
| NC | 0 |

#### Dati tecnici UL


| Maximum UL/CSA horsepower ratings single-phase | V  | HP  |  |
|------------------------------------------------|----|-----|--|
| 110V-120V                                      | HP | 0.5 |  |
| 220V-240V                                      | HP | 1.5 |  |

| Maximum UL/CSA horsepower ratings three-phase, 3-pole | V  | HP  |  |
|-------------------------------------------------------|----|-----|--|
| 200V-208V                                             | HP | 3   |  |
| 220V-240V                                             | HP | 3   |  |
| 440V-480V                                             | HP | 7.5 |  |
| 550V-600V                                             | HP | 10  |  |


#### Caratteristiche meccaniche

|               |                   |
|---------------|-------------------|
| Attacchi tipo | Vite di fissaggio |
| Peso prodotto | g 380             |

#### Dimensioni

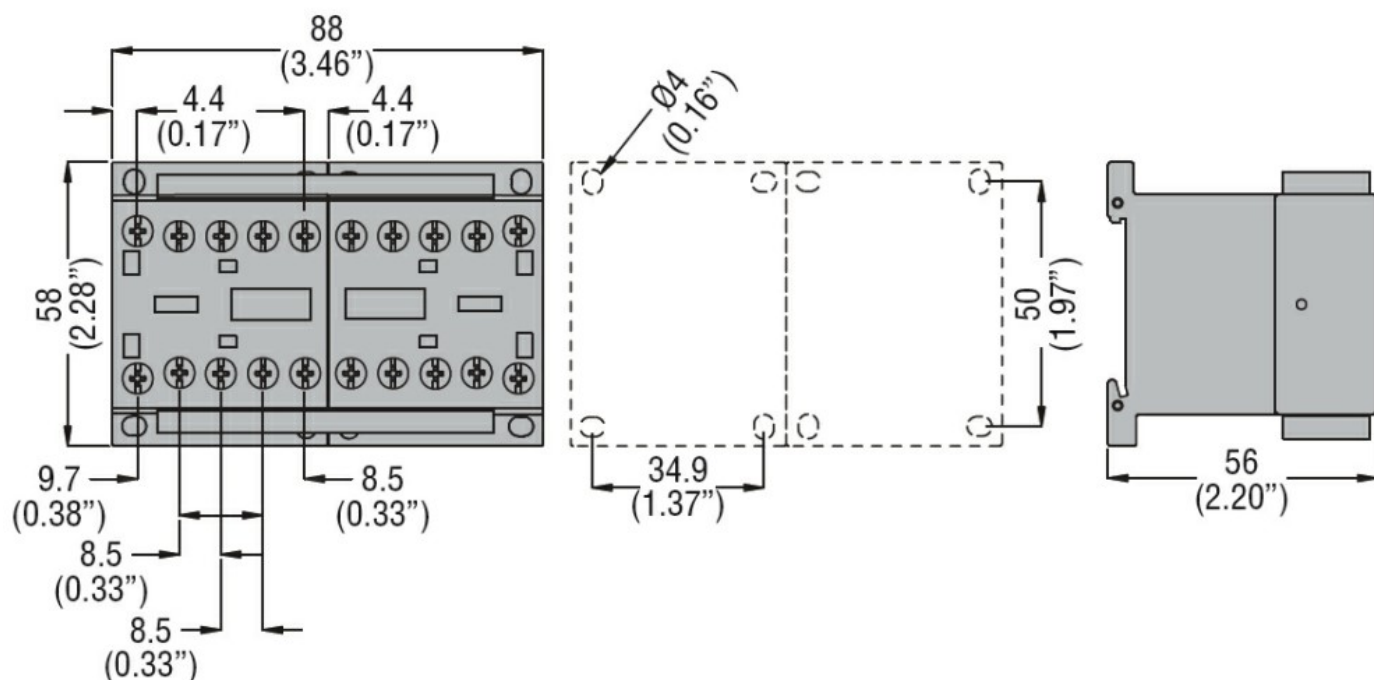

#### Schemi elettrici

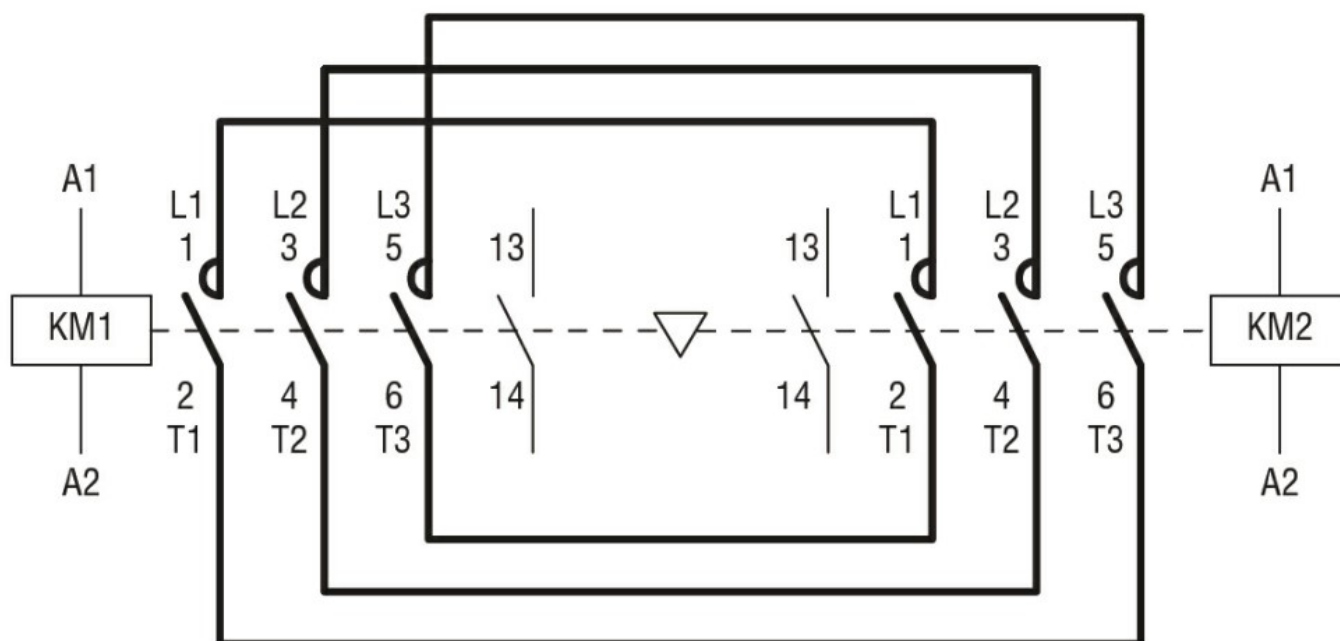

#### Omologazioni e conformità

##### Conformità

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

##### Omologazioni

cULus

#### Classificazione ETIM

ETIM 8.0

EC001037 -  
Combinazione  
starter motore