



#### Electrical features

Maximum operating current ( $\leq 440V$ ) A 12

#### Contact characteristics

Operational current Ie AC-3 ( $\leq 440V \leq 55^{\circ}C$ ) A 12

Rated operational power AC-3 ( $T \leq 55^{\circ}C$ )

|      |    |     |
|------|----|-----|
| 230V | kW | 3.2 |
| 400V | kW | 5.7 |
| 415V | kW | 6.2 |
| 440V | kW | 5.5 |
| 500V | kW | 5   |
| 690V | kW | 5   |

Built-in auxiliary contacts

|    |   |
|----|---|
| NO | 1 |
| NC | 0 |

#### UL technical data

Maximum UL/CSA horsepower ratings single-phase

|           |    |     |
|-----------|----|-----|
| 110V-120V | HP | 0.5 |
| 220V-240V | HP | 1.5 |

Maximum UL/CSA horsepower ratings three-phase, 3-pole


|           |    |     |
|-----------|----|-----|
| 200V-208V | HP | 3   |
| 220V-240V | HP | 3   |
| 440V-480V | HP | 7.5 |
| 550V-600V | HP | 10  |

#### Mechanical features


Terminals type Clamp screw

Weight g 445

#### Dimensions

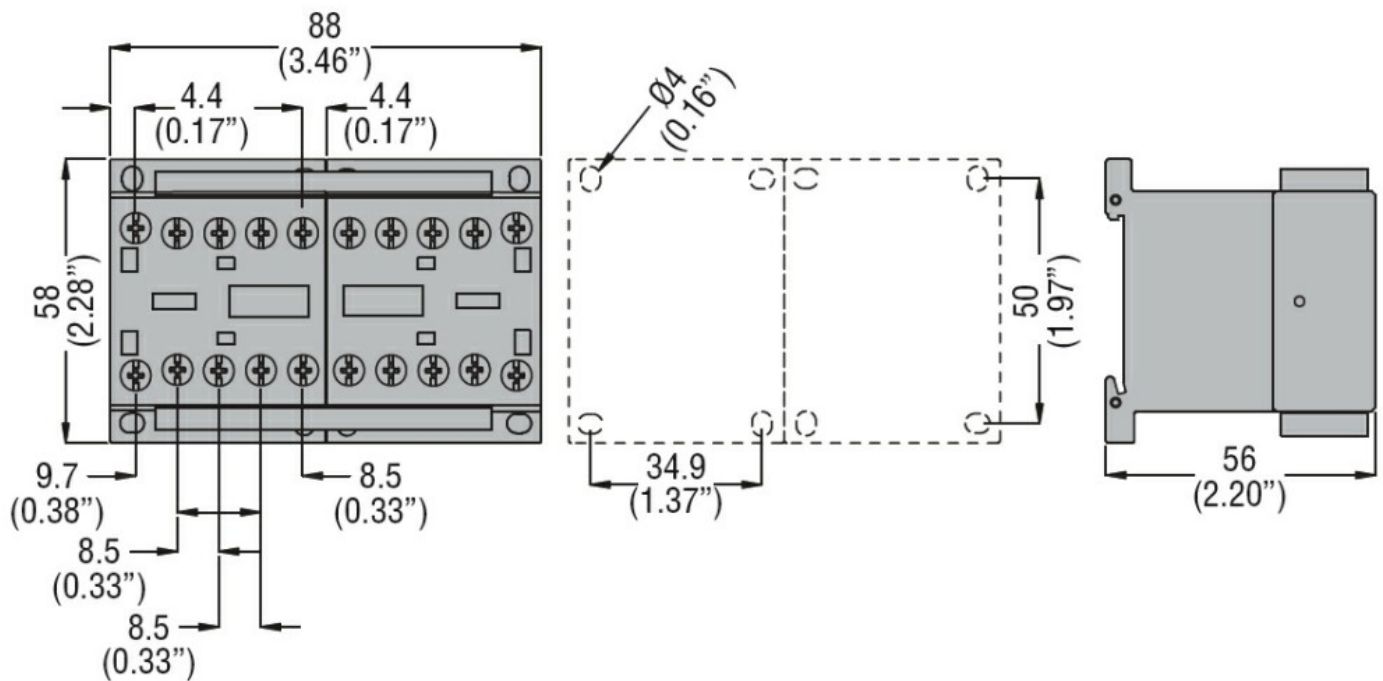

#### Wiring diagrams

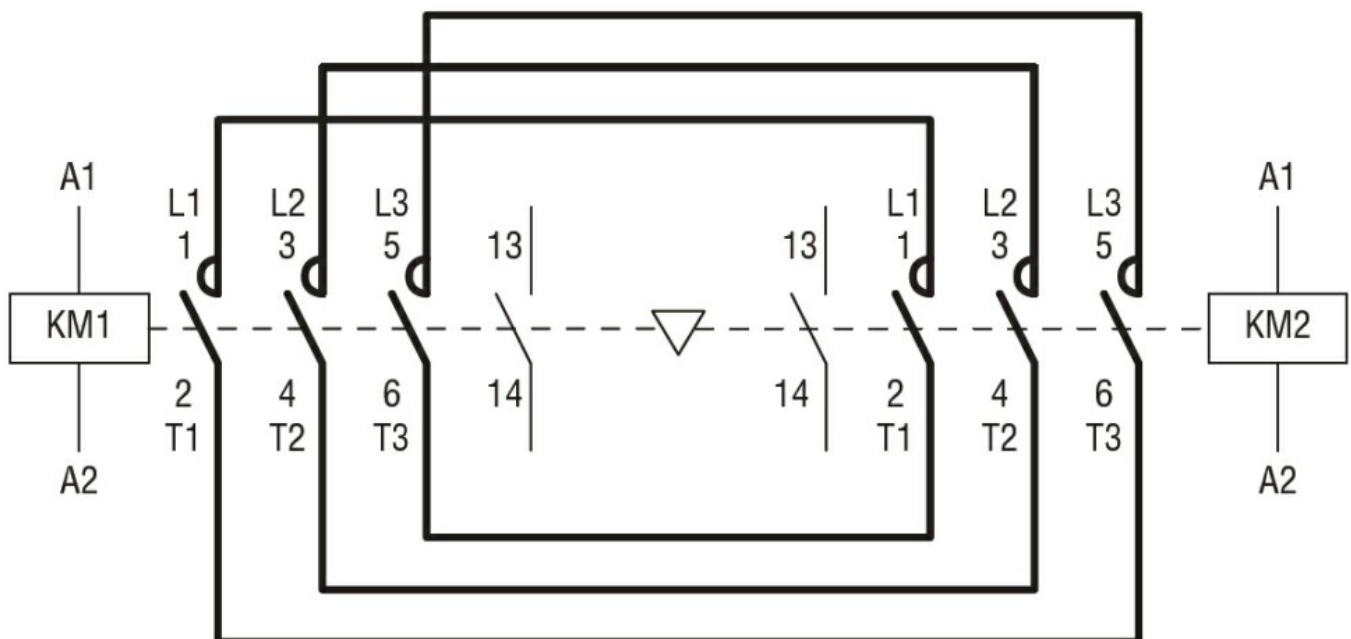

#### Certifications and compliance

##### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

##### Certificates

cULus

#### ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination

