



General characteristics

Number of poles	Nr.	3
Overvoltage category		III
Pollution degree		3
Frontal IP degree		IP20
Type of release		Thermal
Protection fuse		

gG (IEC)	A	20
aM (IEC)	A	8
RK5 (UL)	A	25

Phase failure detection		yes
Reset mode		Manual

Power circuit characteristics

Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	8
Rated operational voltage	V	690
Operational frequency	min max	Hz Hz
		0 400

Operational current I_e	Operational current min Operational current max	A A	4.5 7.5
---------------------------	--	--------	------------

Tripping class		10A
Test Button		Yes
Trip indicator		yes
Terminals		

type		screw and washer
screw		M4
width	mm	9.8
tool		Phillips 2

Tightening torque for terminals	min max min max	Nm Nm lbin lbin	2.3 2.3 1.7 1.7
---------------------------------	--------------------------	--------------------------	--------------------------

Conductor section	AWG/kcmil max	10
-------------------	---------------	----

Auxiliary circuit characteristics

Auxiliary contacts	NO	Nr.	1
	NC	Nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN		V	690
Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated operational voltage		V	690

Operating current AC15

24V	A	3
120V	A	3
240V	A	1.5
380V	A	0.95
480V	A	0.75
500V	A	0.72
600V	A	0.6

Operating current DC13

125V	A	0.11
600V	A	0.22

IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$

A	10
---	----

Terminals

Auxiliary circuit type		screw and washer
Auxiliary circuit screw		M3,5
Auxiliary circuit width	mm	8
Auxiliary circuit tool		Phillips 1

Conductor section

Auxiliary circuit Flexible w/o lug max	mm ²	2.5
Auxiliary circuit Flexible c/w lug max	mm ²	2.5

Tightening torque for terminals

Auxiliary circuit min	Nm	1
Auxiliary circuit max	Nm	1
Auxiliary circuit min	lbin	0.74
Auxiliary circuit max	lbin	0.74

UL/CSA and IEC/EN 60947-5-1 designation

B600-P600

Ambient conditions

Operating temperature

min	°C	-20
max	°C	55

Storage temperature

min	°C	-55
max	°C	70

Compensation temperature

min	°C	-15
max	°C	55

Max altitude

m	3000
---	------

Mechanical features

Operating position

normal allowable	Vertical plan ±30°
Fixing	Direct mounting on BG06... BG09... BG12...

Weight


g	116
---	-----

UL technical data


Full-load current (FLA) for three-phase AC motor

at 480V	A	7.5
at 600V	A	7.5

Dimensions

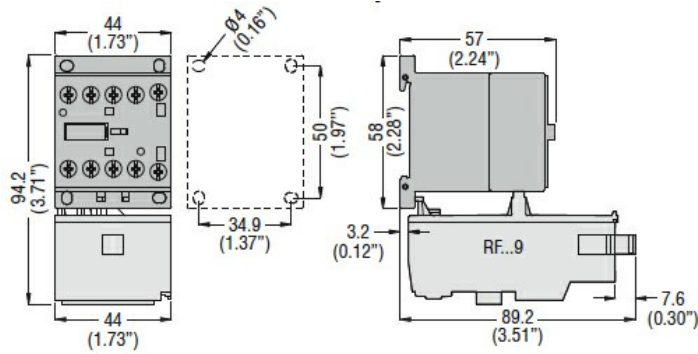

Wiring diagrams

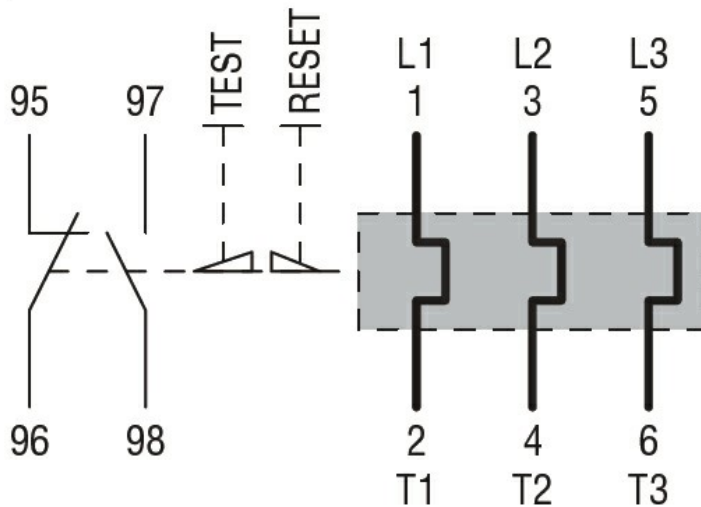

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-4-1
UL508

Certifications

CCC
CSA
cULus
EAC

ETIM classification

ETIM 8.0

EC000106 -
Thermal overload
relay