



Electrical features

Supplies voltage

Type of system	Three phase
Rated supply voltage	208...415VAC
auxiliary supply voltage (Us)	208...240VAC
Rated frequency	50/60
Rated starter current Ie	A 310

Rated motor power in-line

IEC ratings (T≤40°C)

230VAC	kW	90
400VAC	kW	160
500VAC	KW	200

UL ratings (T≤40°C)

220-240VAC	HP	100
380-415VAC	HP	150
440-480VAC	HP	250

Number of controlled phases	Nr.	3
Built-in bypass	No, predisposed for external bypass contactor	
Cooling System	Forced	

Programming interface

Display	Backlit LCD 2x16 character
Programming with NFC technology	No
Optical port	No

Startup and stop settings

Startup method	Torque or voltage ramp with current limitation
Stop method	Torque ramp, voltage ramp, free-wheel stop
Braking method	DC dynamic with external relay

Protections

Auxiliary supply protection	Voltage too low
Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage

Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, maintenance request
Functions	
Built-in bypass	No
Built-in display and keypad	No
Languages	4
View measurements	Yes
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Yes
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	3
Analog inputs	1
Digital outputs	4
Analog output	1
Monitoring communication	Yes
Optical port for programming	No
Event log	No
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes

Input and Output

Digital inputs


SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE).
PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 310A

	Number of digital input	Nr.	3 (2 digital inputs + 1 digital/analog input)
	Digital input type		24VDC (no need for external feeder)
			1 input for start, 1 input programmable (stop, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor), 1 input programmable multifunction (OFF, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor, cascade starting, 0-10V ramp, 2-10V ramp, 0-10V start-stop, PT100 start-stop, PTC protection)
	Digital input functions		
Analog inputs			
	Number of analog input	Nr.	1 (digital/analog) 0-10VDC (0-20mA with external resistor 500Ω)
	Analog input type		

		Motor protection via PTC probes, acceleration and/or deceleration ramp via analog input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable and disable, PT100 input thresholds for motor starting and stopping and PT100 input thresholds for programmable relay enable and disable	
Analog input functions			
Digital outputs			
	Number of digital output	Nr.	4
	Digital output arrangement		3 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 5A 250VAC AC1, 2A 250VAC AC15 C/O output for global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)
	Digital output functions		
Analog outputs			
	Number of analog output	Nr.	1
	Analog output type		0...20mA, 4...20mA (0...10V with external resistor 500Ω) Current, torque, motor thermal status, power factor and active power
	Analog output functions		
Ambient conditions			
Temperature			
	Operating temperature	min	°C -10

	max	°C	+55°C (with current derating >45°C of 1.5%/ °C)
Storage temperature	min max	°C °C	-30 +70
Max altitude		m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity		%	95% without condensation or dripping
Pollution degree			3
Housing			
Mounting			Screw-fixing
IP degree of protection			IP00
Dimensions (W x H x D)	mm		640 x 600 x 380
Weight	Kg		48.9

Dimensions

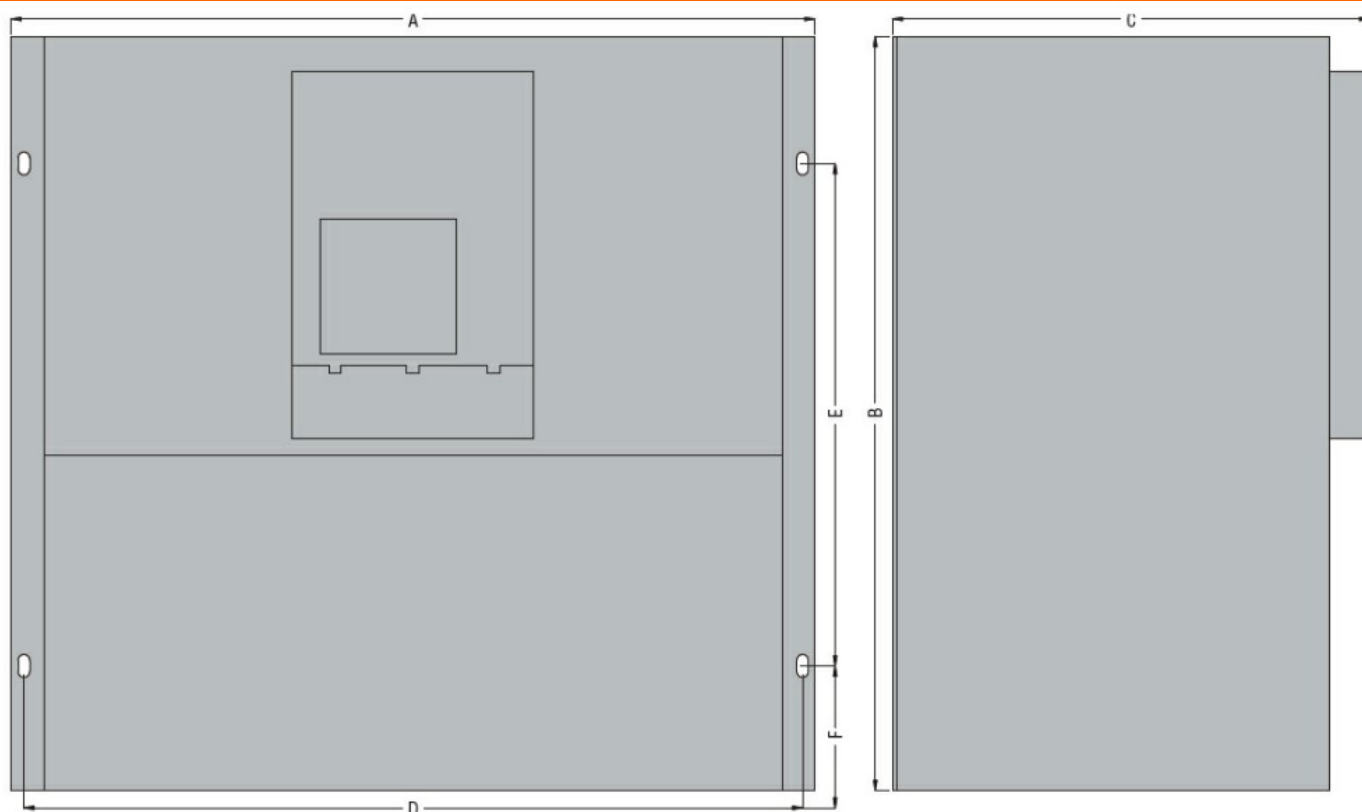

TYPE	A	B	C	D	E	F
ADX 0310	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0365	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0470	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0568	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0640	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0820	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	❶
ADX 1200	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	❶

❶ Consult Customer Service; see contact details on inside front cover.

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-2

Certificates

EAC

ETIM classification

ETIM 8.0

EC000640 - Soft
starter