

General characteristics

Switching diagram	07 - ON/OFF switch 3 poles
N° of elements	2
Mounting form	P25 - Plastic enclosure with red/yellow handle

Contact characteristics

Rated insulation voltage U_i	IEC/EN	V	690	
	UL/CSA	V	600	
Rated impulse withstand voltage U_{imp}		kV	6	
Conventional free air thermal current I_{th}	IEC/EN	A	125	
	UL/CSA	A	130	
Rated operational voltage		V	690	
Rated operational impulse voltage		kV	6	
Maximum fuse size for short-circuit protection I_n (gG)	10kA	A	125	
	15kA	A	100	
	25kA	A	100	
	50kA	A	100	
	63kA	A	100	
Rated short time current I_{cw}	1s	kA	2100	
			10/5 mA/V	
Conductivity				
Operational current I_e IEC/EN	AC1/AC21A			
		A	125	
	AC15			
	110V	A	40	
	220/230V	A	28	
	380/400V	A	15	
	660/690V	A	5	
	Rated operational power in AC	Three-phase AC-3		
		220/230V	kW	18.5
		380/440V	kW	37
500/690V		kW	33	
Single-phase AC-3				
110V		kW	5	
220/230V		kW	11	
380/440V		kW	15	
Three-phase AC23A				
220/230V		kW	30	
380/440V		kW	45	
500/690V		kW	37	
Single-phase AC23A				
110V	kW	5		
220/230V	kW	11		
380/440V	kW	15		
Rated operational current in DC				
	DC21A			

		48V	A	125
		60V	A	80
		110V	A	10
		220V	A	1.2
DC23A (poles in series)				
		24V	A	125 (1)
		48V	A	125 (2)
		60V	A	125 (3)
		110V	A	50 (3)
		220V	A	20 (4)
DC13				
		24V	A	125
		48V	A	100
		60V	A	50
		110V	A	4
Power dissipation			W	6.3
Mechanical features				
Terminals screw				M2X5
Tightening torque for terminals max			Nm	2
Conductor size				
AWG - Rigid cable				
		min	AWG	14
		Max	AWG	1/0
AWG - Flexible cable				
		min	AWG	14
		Max	AWG	1/0
Conductor size (IEC) - Flexible cable				
		min	mm ²	2.5
		Max	mm ²	50
Conductor size (IEC) - Rigid cable				
		min	mm ²	2.5
		Max	mm ²	50
Mechanical life			cycles	1X10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor				
		120V	HP	15
		240V	HP	25
		480V	HP	50
		600V	HP	40
for single-phase motor				
		120V	HP	5
		240V	HP	15
Ambient conditions				
Temperature				
Operating temperature				
		min	°C	-25
		max	°C	+55
Storage temperature				
		min	°C	-40
		max	°C	+70
Resistance & Protection				
Frontal IP degree				IP65
Terminals IP degree				IP00


Dimensions

Series	Enclosure size	Number of elements		Dimensions										Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1		
7GN12 ^①	75x75 ^②	1 - 2	3 - 4	75	75	50	64	4.5	19	14	28	57.5	79.8	4xPG13.5	IP65
7GN20 ^①		1 - 2	3 - 4												
7GN25 ^①		1	2 - 3												
7GN12 ^②	90x90	1 - 3	4 - 6	90	90	79	63	4.5	25	19	30	71.3	98.3	4xPG16	IP65
7GN20 ^②		1 - 3	4 - 6												
7GN25 ^②		1 - 2	3 - 4												
7GN32		1	2 - 3												
7GN40	110x110	1	2 - 3	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
7GN12		1 - 4	5 - 8												
7GN20		1 - 4	5 - 8												
7GN25		1 - 3	4 - 5												
7GN32 ^①		1 - 2	3 - 5												
7GN40 ^①		1 - 2	3 - 5												
7GN63	125x175	1 - 2	3 - 4	125	175	146	112	5.5	32	21	68	84.3	118.3	4xPG21 2xPG11	IP65
7GN32 ^②		1 - 2	3 - 4												
7GN40 ^②		1 - 2	3 - 4												
7GN63 ^①		1 - 2	3 - 4												
7GN125	198x248	1	2	198	248	190-210	140-180	5.5	32	35	104	-	166.5	6xPG16- 21-29	IP65
7GN32		-	1 - 7												
7GN40		-	1 - 7												
7GN63 ^②		-	1 - 6												
7GN125 ^{①②}		-	1 - 4												

① Standard dimensions for cam switch in plastic enclosure with black handle (P).

② DStandard dimensions for cam switch in plastic enclosure with red/yellow handle padlockable in 0 (P25).

Wiring diagrams

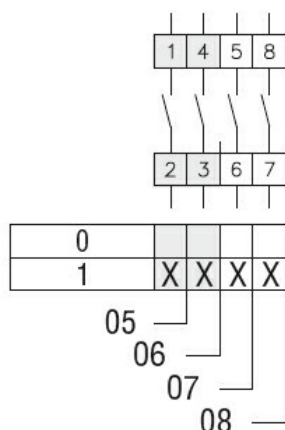

Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete