

General characteristics

Switching diagram	56 - Changeover switch without 0 3 poles
N° of elements	3
Mounting form	P - Plastic enclosure with black handle

Contact characteristics

Rated insulation voltage U_i	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage U_{imp}		kV	6
Conventional free air thermal current I_{th}	IEC/EN	A	125
	UL/CSA	A	130
Rated operational voltage		V	690
Rated operational impulse voltage		kV	6
Maximum fuse size for short-circuit protection I_n (gG)	10kA	A	125
	15kA	A	100
	25kA	A	100
	50kA	A	100
	63kA	A	100
Rated short time current I_{cw}	1s	kA	2100
			10/5 mA/V
Conductivity			
Operational current I_e IEC/EN	AC1/AC21A		
		A	125
AC15	110V	A	40
	220/230V	A	28
	380/400V	A	15
	660/690V	A	5
Rated operational power in AC	Three-phase AC-3		
	220/230V	kW	18.5
	380/440V	kW	37
	500/690V	kW	33
Single-phase AC-3	110V	kW	5
	220/230V	kW	11
	380/440V	kW	15
Three-phase AC23A	220/230V	kW	30
	380/440V	kW	45
	500/690V	kW	37
Single-phase AC23A	110V	kW	5
	220/230V	kW	11
	380/440V	kW	15
Rated operational current in DC			

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, CHANGEOVER SWITCH WITHOUT 0, 3
POLES 16A IN PLASTIC ENCLOSURE 75X75MM WITH BLACK HANDLE

DC21A

48V	A	125
60V	A	80
110V	A	10
220V	A	1.2

DC23A (poles in series)

24V	A	125 (1)
48V	A	125 (2)
60V	A	125 (3)
110V	A	50 (3)
220V	A	20 (4)

DC13

24V	A	125
48V	A	100
60V	A	50
110V	A	4

Power dissipation	W	6.3
-------------------	---	-----

Mechanical features

Terminals screw	M2X5
-----------------	------

Tightening torque for terminals max	Nm	2
-------------------------------------	----	---

Conductor size

AWG - Rigid cable

min	AWG	14
Max	AWG	1/0

AWG - Flexible cable

min	AWG	14
Max	AWG	1/0

Conductor size (IEC) - Flexible cable

min	mm ²	2.5
Max	mm ²	50

Conductor size (IEC) - Rigid cable

min	mm ²	2.5
Max	mm ²	50

Mechanical life	cycles	1X10 ⁶
-----------------	--------	-------------------

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	15
240V	HP	25
480V	HP	50
600V	HP	40

for single-phase motor

120V	HP	5
240V	HP	15

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree	IP65
-------------------	------

Terminals IP degree

IP00


Dimensions

Series	Enclosure size	Number of elements		Dimensions										Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1		
7GN12Ⓟ	75x75Ⓟ	1 - 2	3 - 4	75	75	50	64	4.5	19	14	28	57.5	79.8	4xPG13.5	IP65
7GN20Ⓟ		1 - 2	3 - 4												
7GN25Ⓟ		1	2 - 3												
7GN12Ⓟ	90x90	1 - 3	4 - 6	90	90	79	63	4.5	25	19	30	71.3	98.3	4xPG16	IP65
7GN20Ⓟ		1 - 3	4 - 6												
7GN25Ⓟ		1 - 2	3 - 4												
7GN32		1	2 - 3												
7GN40	110x110	1	2 - 3	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
7GN12		1 - 4	5 - 8												
7GN20		1 - 4	5 - 8												
7GN25		1 - 3	4 - 5												
7GN32Ⓟ		1 - 2	3 - 5												
7GN40Ⓟ		1 - 2	3 - 5												
7GN63	125x175	1 - 2	3 - 4	125	175	146	112	5.5	32	21	68	84.3	118.3	4xPG21 2xPG11	IP65
7GN32Ⓟ		1 - 2	3 - 4												
7GN40Ⓟ		1 - 2	3 - 4												
7GN63Ⓟ		1 - 2	3 - 4												
7GN125	198x248	1	2	198	248	190-210	140-180	5.5	32	35	104	-	166.5	6xPG16- 21-29	IP65
7GN32		-	1 - 7												
7GN40		-	1 - 7												
7GN63Ⓟ		-	1 - 6												
7GN125Ⓟ		-	1 - 4												

Ⓟ Standard dimensions for cam switch in plastic enclosure with black handle (P).

Ⓟ DStandard dimensions for cam switch in plastic enclosure with red/yellow handle padlockable in 0 (P25).

Wiring diagrams

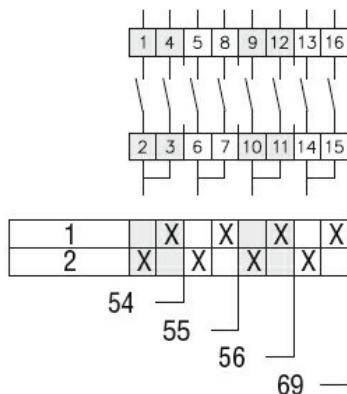

Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete