



Mechanical features

Weight	g	16
--------	---	----

AC coil operating

Rated AC voltage at 60Hz	V	24
--------------------------	---	----

AC operating voltage

of 60Hz coil powered at 60Hz
pick-up

min	%Us	80
max	%Us	110

drop-out

min	%Us	20
max	%Us	55

AC average coil consumption at 20°C

of 60Hz coil powered at 60Hz

in-rush	VA	75
holding	VA	9


Dissipation at holding ≤20°C 50Hz

W	2.5
---	-----

UL technical data

Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Dimensions

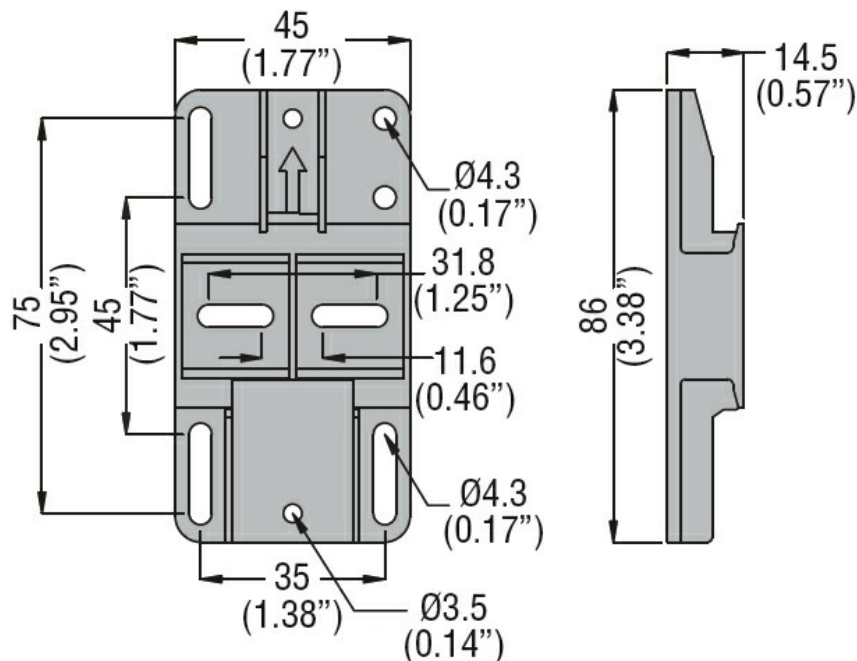

Certifications and compliance

Certificates

EAC

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology