



Electrical features

IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A	4
Rated impulse withstand voltage U_{imp}	kV	4
Minimum switching capacity		$\geq 12\text{V } \geq 5\text{mA}$

Control circuit

Auxiliary contacts	NO	Nr.	2
--------------------	----	-----	---

Operations

Mechanical life	cycles	3000000
-----------------	--------	---------

Ambient conditions

Operating temperature	min	$^{\circ}\text{C}$	-5
	max	$^{\circ}\text{C}$	55

Storage temperature	min	$^{\circ}\text{C}$	-30
	max	$^{\circ}\text{C}$	80

Max altitude	m	2000
--------------	---	------


Mechanical features

Tightening torque for terminals	max	Nm	0.8
Weight		g	44

Resistance & Protection

Pollution degree		3
------------------	--	---

Dimensions

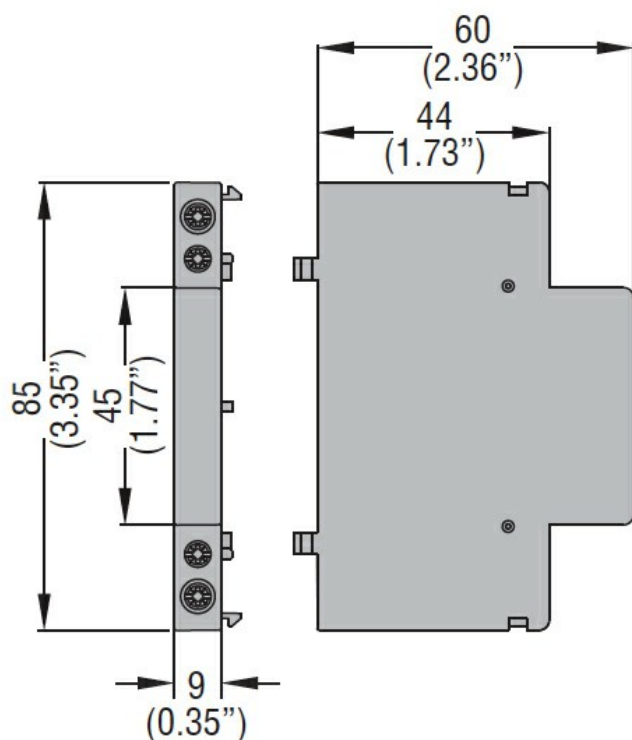

Certifications and compliance

Compliance

IEC/EN/BS 60669-2-2

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

IEC/EN/BS 61095

Certificates

EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block