




Current inputs				
Primary current I _{pn} (/5)	A		250	
Operational frequency	min	Hz	50	
	max	Hz	60	
Secondary output current	A		5	
Overload withstand I _{pn}	%		120	
Burden	cl. 1	VA	2.5	
Insulations				
Rated insulation voltage U _i IEC/EN	V		720	
IEC rated short-time thermal current I _{th}	I _{th} for s		40...60	
IEC rated dynamic current I _{dyn}	I _{th} for s		2.5	
Insulation dry type			Class E	
Mechanical features				
Terminals type			Faston	
Fixing			DIN rail or by Screw	
Weight	g		130	
Ambient conditions				
Temperature	Operating temperature			
	min	°C	-25	
	max	°C	+50	
	Storage temperature			
	min	°C	-40	
	max	°C	+80	
Relative humidity		%	90	
Protection degree			IP30	
Dimensions				

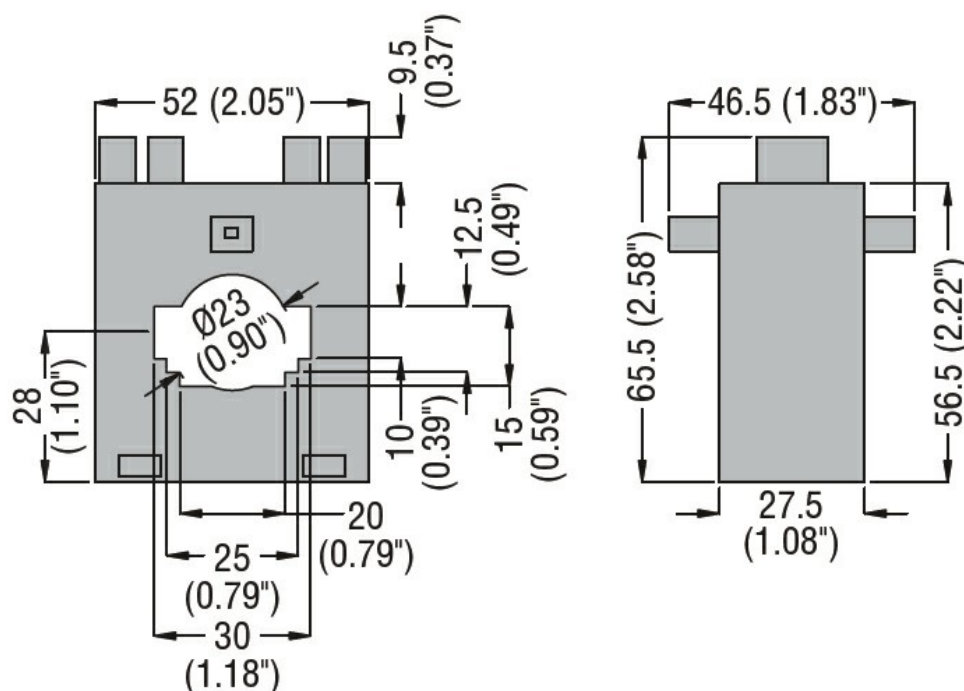

Certifications and compliance

Certifications

IEC/EN/BS 61869-1

IEC/EN/BS 61869-2

Compliance

EAC

ETIM classification

EC000066 - Power contactor, AC switching