




Current inputs				
Primary current I _{pn} (/5)		A		400
Operational frequency				
	min	Hz		50
	max	Hz		60
Secondary output current		A		5
Overload withstand I _{pn}		%		120
Burden				
	cl. 0.5	VA		2
	cl. 1	VA		3
Insulations				
Rated insulation voltage U _i IEC/EN		V		720
IEC rated short-time thermal current I _{th}		I _{th} for s		40...60
IEC rated dynamic current I _{dyn}		I _{th} for s		2.5
Insulation dry type				Class E
Mechanical features				
Terminals type				Faston
Fixing				DIN rail or by Screw
Weight		g		130
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+50
	Storage temperature			
		min	°C	-40
		max	°C	+80
Relative humidity		%		90
Protection degree				IP30
Dimensions				

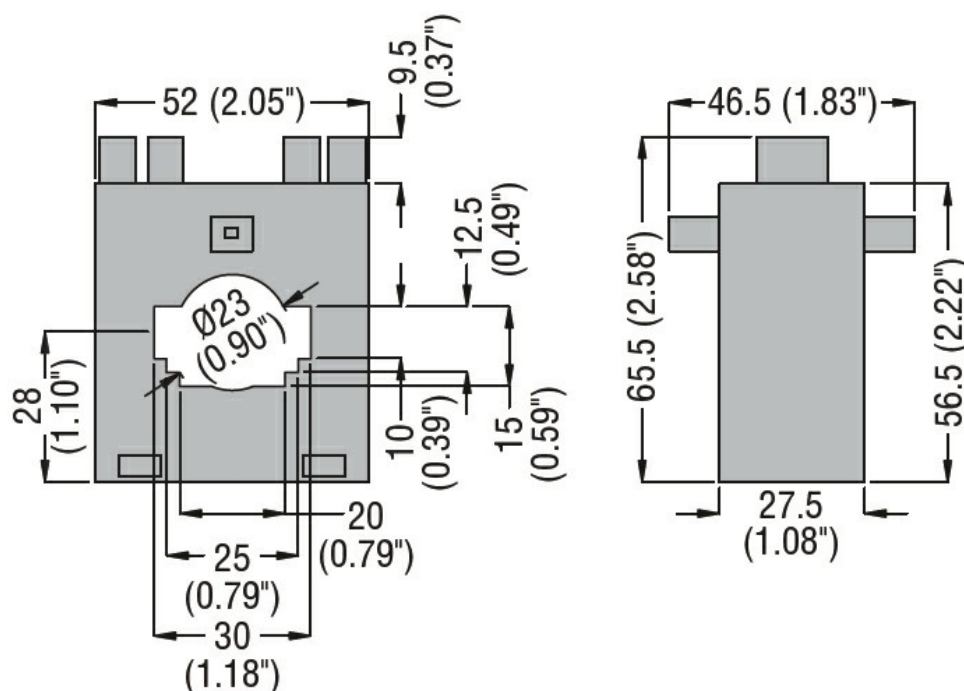

Certifications and compliance

Certifications

IEC/EN/BS 61869-1

IEC/EN/BS 61869-2

Compliance

EAC

ETIM classification

EC000066 - Power contactor, AC switching