





Electrical features			
IEC maximum rated current (In)		A	32
IEC maximum rated voltage (Un)		V	690
IEC Utilization category			AC22B 500V - AC21B 690V
Power dissipation Max		W	3
Derating factor of rated current In for different ambient temperature	20°C		1
	30°C		0.95
	40°C		0.9
	50°C		0.8
	60°C		0.7
	70°C		0.5
Derating factor of rated current In for side by side fuse holders (poles)	1-4		1
	5-6		0.8
	7-9		0.7
	≥10		0.6
Rated current (In)		A	32
Ambient conditions			
Operating temperature	min	°C	-20
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+80
Max altitude		m	3000
Mechanical features			
Operating position	normal		Vertical plan
	allowable		Any
Fixing			35mm DIN rail
Tightening torque for terminals	max	Nm	2.5
	max	lbin	22
Conductor section	Flexible max (IEC)	mm²	16
	- Flexible max (AWG/kcmil)		8
	Rigid max (IEC)	mm²	16
	- Rigid max (AWG/kcmil)		8
Weight		g	132
Resistance & Protection			
Frontal IP degree			IP20
Dimensions			

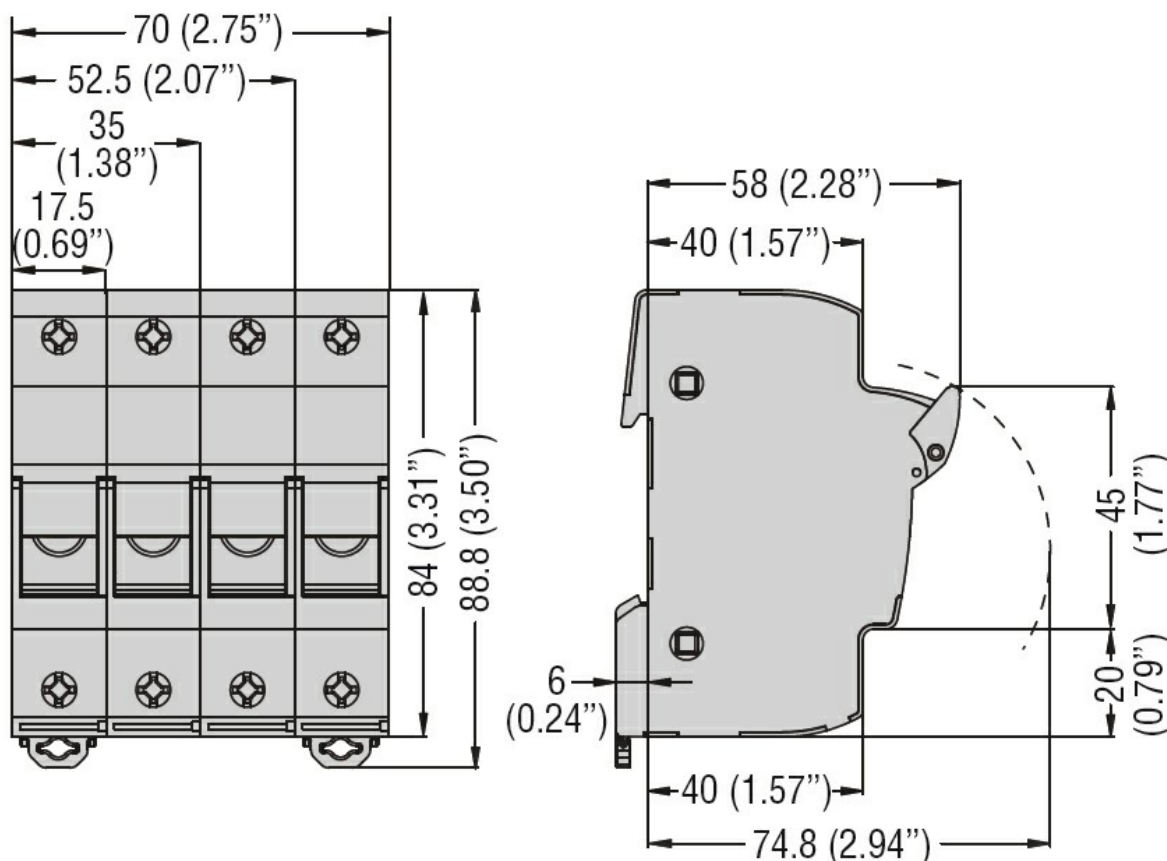

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°4248.1

IEC/EN 60269-1

IEC/EN 60269-2

IEC/EN 60947-1

IEC/EN 60947-3

UL 4248-1

Certifications

CSA

cUR

EAC

ETIM classification

ETIM 8.0

EC002705 -
Holder for
cylindrical fuse