
FE05D025

FUSE FOR PHOTOVOLTAIC APPLICATIONS, FOR 14X85MM FUSES. 10KA BREAKING CAPACITY AT 1500VDC, 25A



Electrical features			
IEC maximum rated current (In)		A	25
IEC maximum rated voltage (Un)		V	1500
Rated current (In)		A	25
IEC fuse class			gPV
Power consumption at 0,7 In		W	2.5
Power consumption at In		W	6.4
Preacring I2t		A2s	140
Total I2t at 1000Vdc		A2s	458
Ambient conditions			
Operating temperature			
	min	°C	-20
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+80
Max altitude		m	3000
Mechanical features			
Weight		g	31
Dimensions			

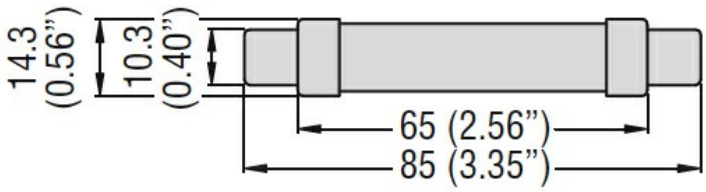

Certifications and compliance

Compliance

IEC/EN/BS 60269-6

ETIM classification

ETIM 8.0	EC002704 - Cylindrical fuse

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding