



#### Contact characteristics

|                                           |    |     |
|-------------------------------------------|----|-----|
| Rated insulation voltage $U_i$ IEC/EN     | V  | 250 |
| Rated impulse withstand voltage $U_{imp}$ | kV | 4   |

#### Coil characteristics

|                                |   |               |
|--------------------------------|---|---------------|
| Relay control voltage + socket | V | 12...24VAC/DC |
|--------------------------------|---|---------------|

#### Mechanical features

|                                                   |                  |
|---------------------------------------------------|------------------|
| Socket screw tightening tool (cross / flat blade) | Phillips 0/3.5mm |
|---------------------------------------------------|------------------|

#### Conductor section

AWG/Kcmil

min 20

max 16

IEC


min mm<sup>2</sup> 0.5

max mm<sup>2</sup> 1.5


#### Fixing

On 35mm DIN  
rail

#### Dimensions

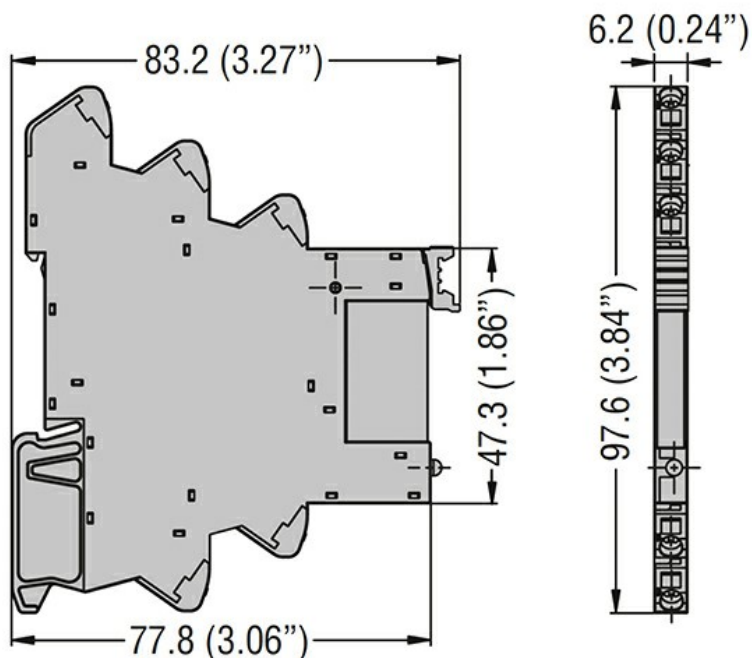

#### Wiring diagrams

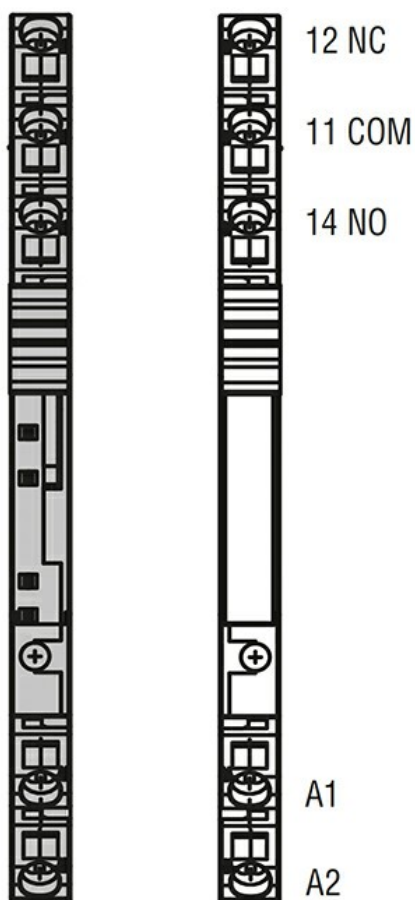

#### Certifications and compliance

##### Compliance

IEC/EN 61810

##### Certificates

CSA

cURus

EAC

#### ETIM classification

ETIM 8.0

EC001456 -  
Relay socket