



Contact characteristics

Rated insulation voltage U_i IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	4

Coil characteristics

Relay control voltage + socket	V	110... 125VAC/DC
--------------------------------	---	---------------------


Mechanical features

Max socket terminal tightening torque	Nm	0.5Nm
Socket screw tightening tool (cross / flat blade)		Phillips 0/3.5mm


Conductor section	AWG/Kcmil		
		min	20
		max	16
	IEC	min	mm ² 0.5
		max	mm ² 1.5

Fixing	On 35mm DIN rail
--------	------------------

Dimensions

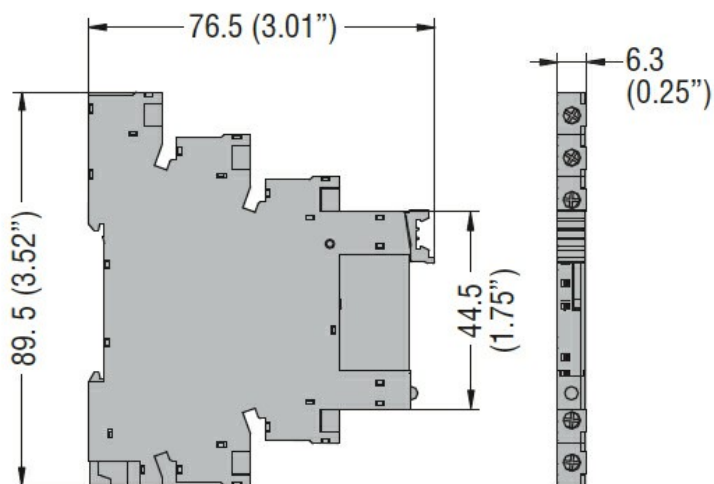

Wiring diagrams

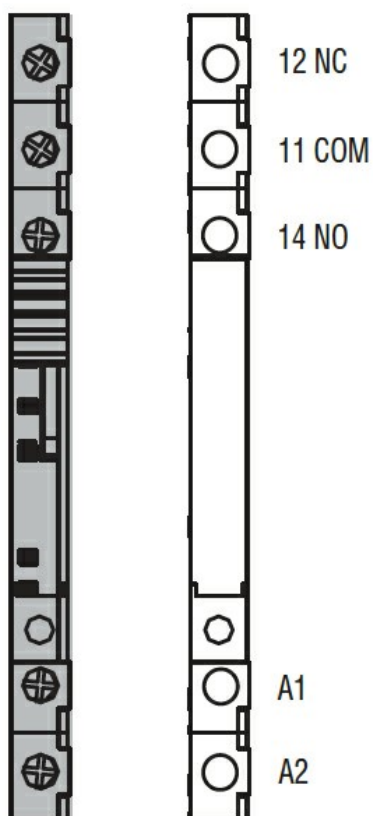

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
Relay socket