



Contact characteristics

Rated insulation voltage U_i IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	4


Mechanical features

Max socket terminal tightening torque	Nm	0.6Nm
Socket screw tightening tool (cross / flat blade)		Phillips 1/4.5mm

Conductor section	AWG/Kcmil		
	min		20
	max		14
	IEC		
	min	mm ²	0.5
	max	mm ²	2.5


Fixing	On 35mm DIN rail and with screw		
--------	---------------------------------	--	--

Dimensions

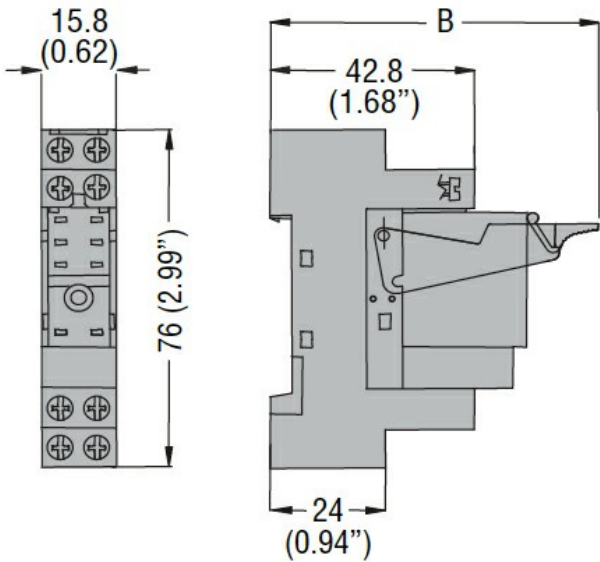

B: 72.5mm (2.85") con HR3X88
82.5mm (3.25) con XR5X88

Wiring diagrams

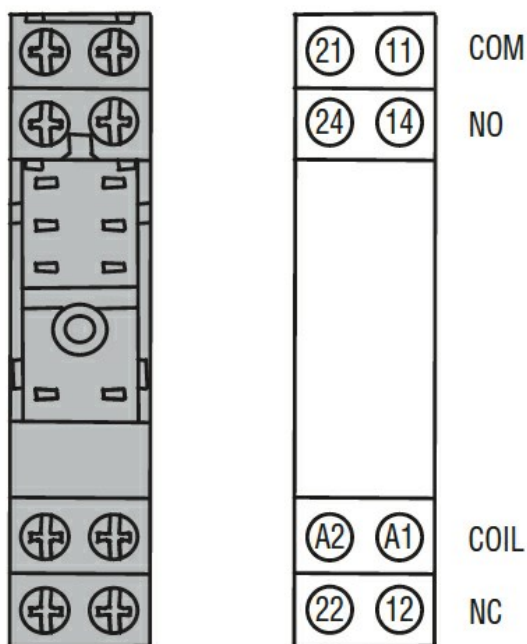

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cULus

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
Relay socket