LPFD01L100

COMMUNICATION INTERFACE Ø30MM PLATINUM SERIES FLAT METAL, USB INTERFACE TYPE 3.0, A FEMALE/A MALE CONNECTION TYPE WITH CABLE 1MT LONG



General characteristics

Material	Aluminium and zinc alloy for the metal part, polyamide for plastic parts
IEC degree of protection	IP65 on front

UL technical data


UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front

Ambient conditions

Temperature

Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85

Dimensions

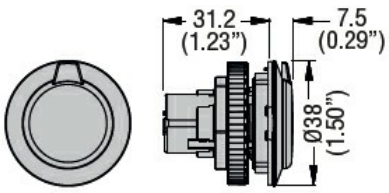

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-5-1
- UL508

Certificates

- cULus

ETIM classification

ETIM 8.0	EC002780 - Interface module

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding