LPFS332R622E

METALOWY PRZEŁĄCZNIK PŁASKI Ø30MM SERII PLATINUM, Z KLUCZEM, 3 POZYCJE, 1 - 0 - 2. SPECJALNY KOD KLUCZA. WYJĘCIE KLUCZA W POZYCJI 1



Charakterystyka ogólna

Kolor	Czarny
Typ pozycji	1 - 0 - 2, wyjęcie klucza na 1, 0 i 2
Materiał	Stop cynku i aluminium dla części metalowych, poliamid dla części z tworzywa sztucznego
Stopień ochrony według IEC	IP66, IP67 oraz IP69K

Właściwości mechaniczne

Trwałość mechaniczna	cycles	1000000
Montaż		Bez adaptera montażowego
Adapter do montażu		LPXAU120M

Dane techniczne UL


Stopień ochrony według UL	Typ 1, 2, 3R, 4, 4X, 12, 12K

Warunki otoczenia

Temperatura

Temperatura pracy			
	min.	°C	-25
	maks.	°C	+70
Temperatura składowania			
	min.	°C	-40
	maks.	°C	+85

Wymiary

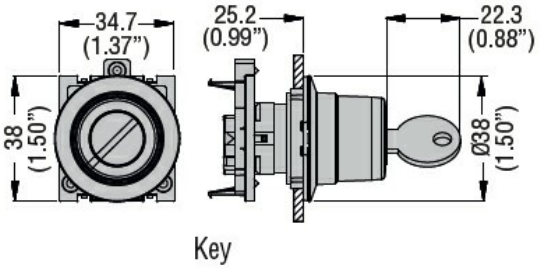

Certyfikaty i zgodność

Zgodność

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-5-1
- UL508

Certyfikaty

- cULus

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Klasyfikacja ETIM

ETIM 8,0	EC002611 - Przełącznik sterujący

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding