



General characteristics

Colour	Yellow
Type of positions	Mushroom head pushbutton
Material	Aluminium and zinc alloy for metal parts and polyamide for plastic parts
IEC degree of protection	IP66, IP67 and IP69K

Mechanical features

Mechanical life - spring return actuators	cycles	5000000
Fixing		Without mounting adapter
Mounting adapter		LPXAU120M


UL technical data

UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K
-------------------------	------------------------------

Ambient conditions

Temperature	Operating temperature	min	°C	-25
		max	°C	+70
	Storage temperature	min	°C	-40
		max	°C	+85

Dimensions

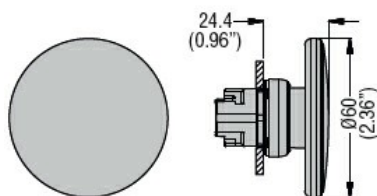

Spring return

Certifications and compliance

Compliance	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508

Certificates	cULus
--------------	-------

ETIM classification

ETIM 8.0

EC000221 -
Front element for
push button