



General characteristics

Colour Blue

Electrical characteristics

Rated frequency	Hz	50-60
Supply voltage (AC)	V	185...265

Operations

Electrical life	hours	100000
-----------------	-------	--------

Mechanical features

Conductor section

AWG/kcmil conductor section

max	14
-----	----

IEC

max	mm ²	1 or 2 / 2.5
-----	-----------------	--------------

Mounting adapter

LPXAU120

Weight

g	15
---	----

Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70


Storage temperature

min	°C	-40
max	°C	+85

Dimensions

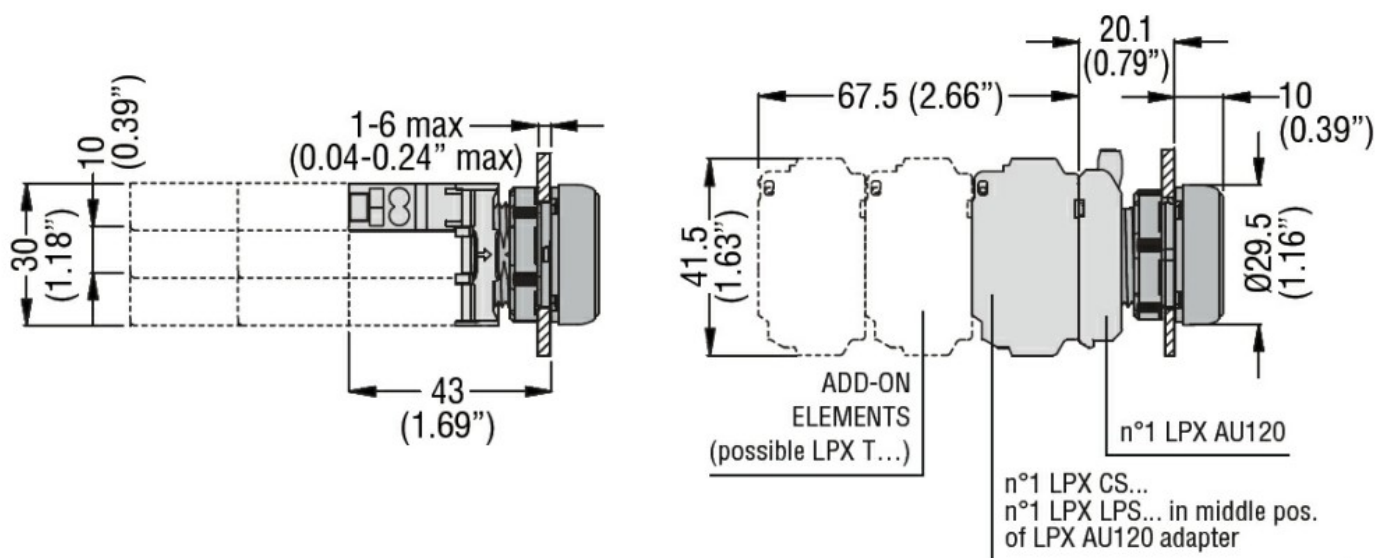

Wiring diagrams

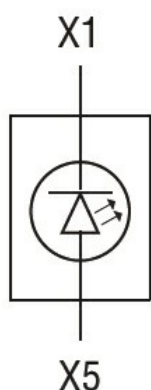

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC
RINA
UL

ETIM classification

ETIM 8.0

EC000204 -
Lamp holder
block for control
circuit devices