



### General characteristics

|                          |                   |
|--------------------------|-------------------|
| Colour                   | Grey              |
| Material                 | Polycarbonate     |
| IEC degree of protection | IP66, IP67, IP69K |

### Ambient conditions

Temperature


Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

### Dimensions

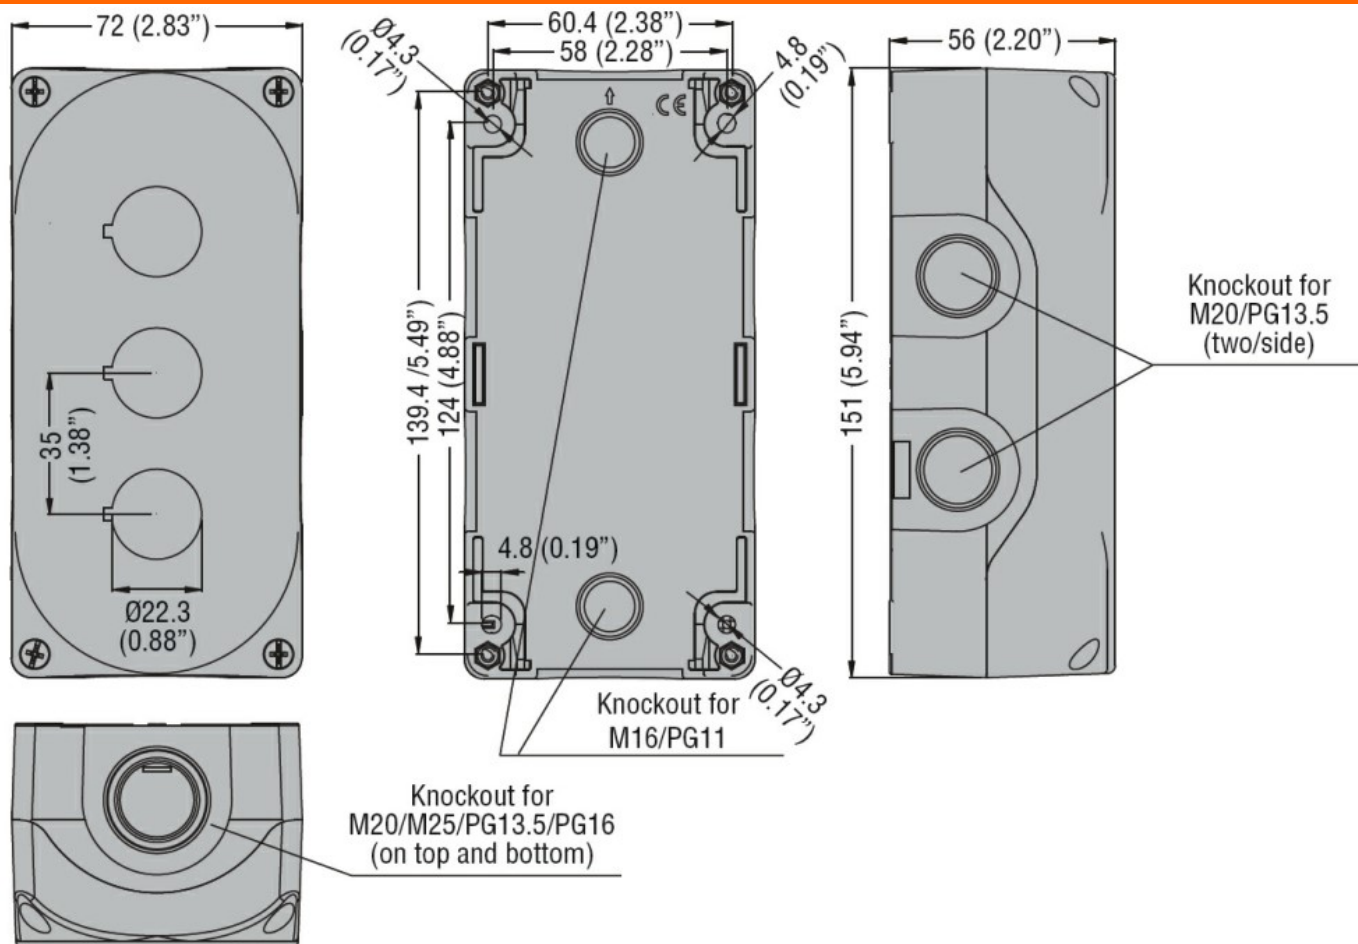

### Certifications and compliance

Certificates

cULus

### ETIM classification

GREY CONTROL STATION LPZP3A8 COMPLETE WITH WHITE FLUSH PUSHBUTTON "UP ARROW" LPCB1158 1NO, RED FLUSH PUSHBUTTON "O" LPCB1104 1NC AND WHITE FLUSH PUSHBUTTON "DOWN ARROW" LPCB1152 1NO

ETIM 8.0

EC000225 -  
Control circuit  
devices  
combination in  
enclosure