





Power supply				
Rated auxil. supply voltage				24VDC
Operating voltage range				20.4...28.8VDC
Average current consumption		mA		70
Analog inputs				
Number of analog input		Nr.		4
Analog input type				Configurable voltage or current inputs
Inputs signal range		V		0...10VDC 0/4...20mA
Resolution				Voltage inputs: 10mV Current inputs: 40µA
Connections				
Terminals type				Screw
Ambient conditions				
Temperature	Operating temperature			
		min	°C	-20
		max	°C	+55
	Storage temperature			
		min	°C	-40
		max	°C	+70
Relative humidity			%	<90% (non condensing)
Housing				
Mounting				35mm DIN rail or screw fixing (M4x15mm)
Degree of protection				IP20
Dimensions (W x H x D)		mm		38 x 106 x 59.3
Weight		g		160
Dimensions				

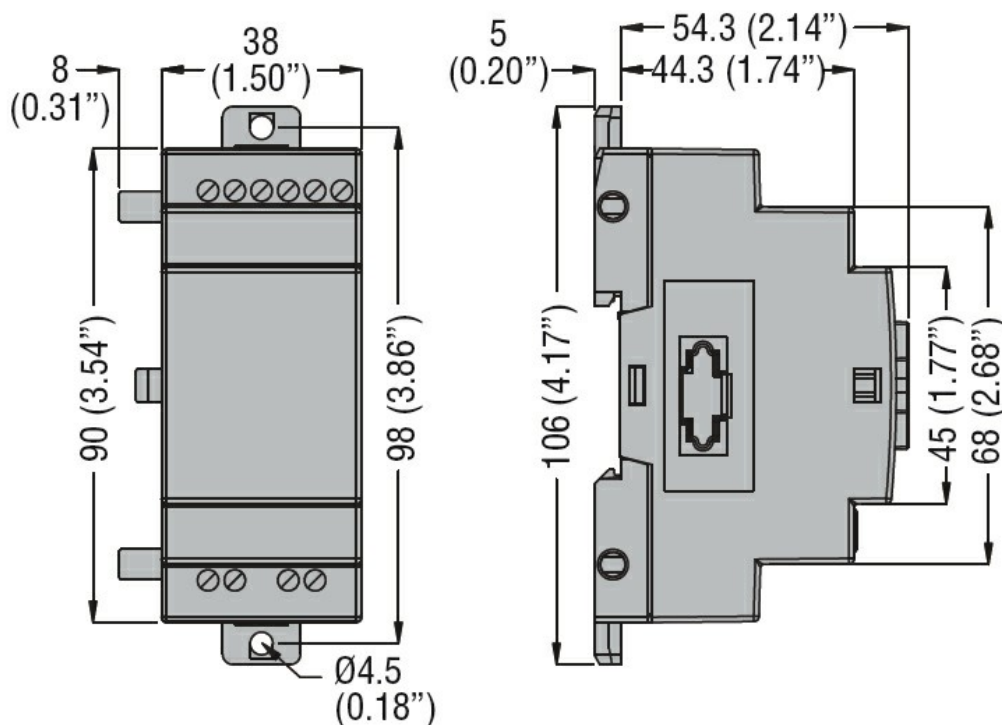

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 142

IEC/EN 61131-2

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001420 - PLC
analogue I/O-
module