



General characteristics

Diameter	mm - inch	70 / 2.75
Supply voltage (DC)	V	12...24
IEC degree of protection		IP65
Power consumption	VA	1

Mechanical features

Terminals screw	Spring terminals
Conductor section	

AWG/Kcmil

min	16
max	24

IEC

min	mm ²	0.25
max	mm ²	1.5

Weight	g	170
--------	---	-----


Ambient conditions

Temperature


Operating temperature

min	°C	-30
max	°C	+50

Dimensions

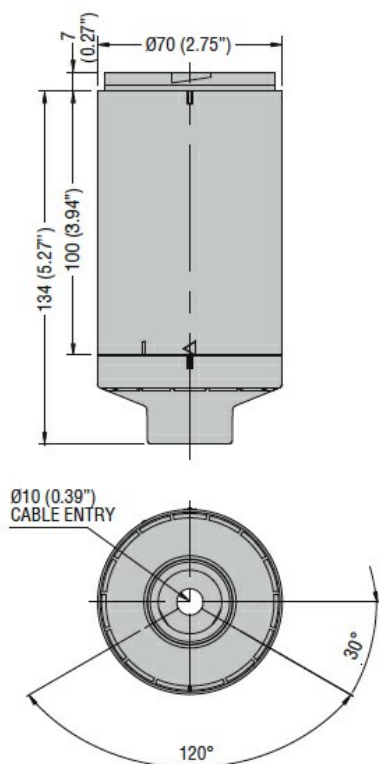

Wiring diagrams

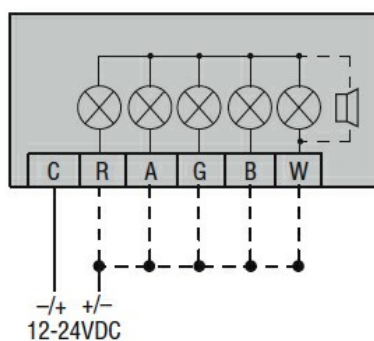

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC001154 -
Stand for signal
tower without
tube